



Contactor relay, 62E, DIN EN 50011, 6 NO + 2 NC, screw terminal DC operation 24 V DC

<b>product designation</b>	Auxiliary contactor	
<b>product type designation</b>	3TH4	
<b>size of contactor</b>	0	
<b>reference code according to IEC 81346-2</b>	K	
<b>Substance Prohibittance (Date)</b>	03/01/2017	
<b>ambient temperature during operation</b>	-25 ... +55 °C	
<b>type of voltage of the control supply voltage</b>	DC	
<b>control supply voltage at DC</b>		
• rated value	24 V	
<b>number of NC contacts for auxiliary contacts</b>	2	
• delayed switching	0	
• lagging switching	0	
• make-before-break switching	0	
<b>number of NO contacts for auxiliary contacts</b>	6	
• delayed switching	0	
• leading contact	0	
• make-before-break switching	0	
<b>number of CO contacts for auxiliary contacts</b>	0	
<b>identification number and letter for switching elements</b>	62 E	
<b>operational current at AC-15</b>		
• at 230 V rated value	10 A	
• at 400 V rated value	6 A	
<b>fastening method</b>	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022	
<b>height</b>	78 mm	
<b>width</b>	45 mm	
<b>depth</b>	135 mm	
<b>type of electrical connection for auxiliary and control circuit</b>	screw-type terminals	
<b>Safety related data</b>		
B10 value with high demand rate according to SN 31920	1 000 000; With 0.3 x I <sub>e</sub>	
T1 value for proof test interval or service life according to IEC 61508	20 a	
<b>protection class IP on the front according to IEC 60529</b>	IP00	
<b>Certificates/ approvals</b>		
General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity



[Type Examination Certificate](#)



Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



[Type Test Certificates/Test Report](#)

[Miscellaneous](#)

[Special Test Certificate](#)

[Miscellaneous](#)



other	Railway
-------	---------

[Confirmation](#)

[Special Test Certificate](#)

#### Further information

**Siemens has decided to exit the Russian market (see here).**

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

**Siemens is working on the renewal of the current EAC certificates.**

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TH4262-0BB4>

**Cax online generator**

<http://support.automation.siemens.com/WWW/CAXorder/default.aspx?lang=en&mlfb=3TH4262-0BB4>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3TH4262-0BB4>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3TH4262-0BB4&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TH4262-0BB4&lang=en)

**Characteristic: Tripping characteristics, I<sup>t</sup>, Let-through current**

<https://support.industry.siemens.com/cs/ww/en/ps/3TH4262-0BB4/char>


**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TH4262-0BB4&objecttype=14&gridview=view1>

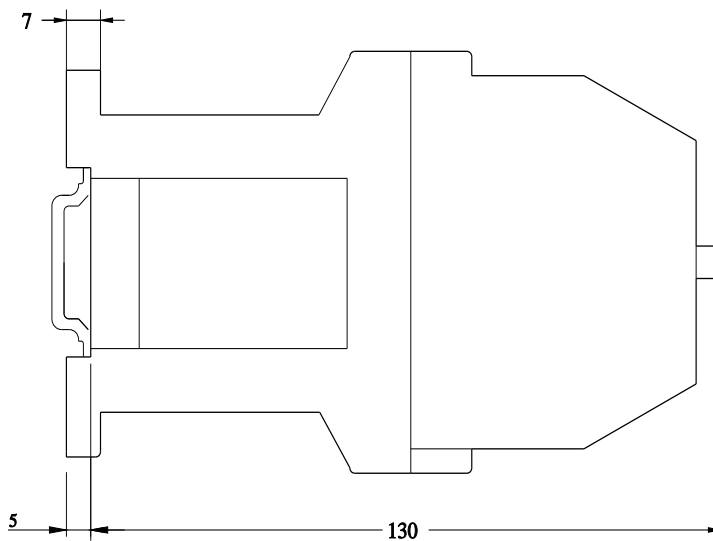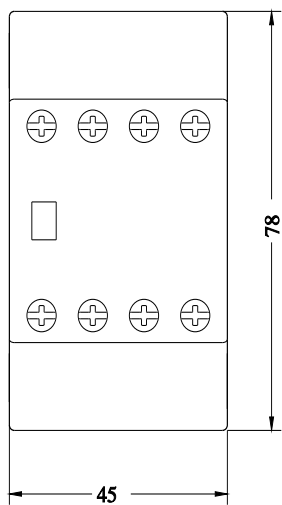

---

last modified:

11/21/2022 

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Contactors - Solid State category:](#)

*Click to view products by* [Siemens manufacturer:](#)

Other Similar products are found below :

[14JU+32AA](#) [RGC1A23D15KKE](#) [RGC1A60D25KKE](#) [RGC1A60D30KGU](#) [RGC1A60D30KKE](#) [RGC1A60D40KGE](#) [RGC2A60D25KKE](#)  
[RGC2P60V25C1DM](#) [3TG1010-0AL2](#) [3TG1010-0BB4](#) [3TG1010-1AL2](#) [3TG1001-0AC2](#) [3TG1001-1AL2](#) [3TH4244-0AP0](#)  
[RGC1A23A15KKE](#) [RGC1A60D25KGU](#) [DRC3P48C411R2](#) [DRC3P48D433R](#) [G3J-T211BL-C DC12-24](#) [DRA4D250E6](#) [G3PE-215B-3N](#)  
[DC12-24](#) [DRC3P48A411R](#) [G3PE-245B-2 DC12-24](#) [G3J-T217BL-C AC100-240](#) [G3J-205BL DC12-24](#) [GNR10DCZ](#) [GNR30DCR](#) [G3PE-](#)  
[515B-3 DC12-24](#) [G3PE-225B-3 DC12-24](#) [G3PE-535B-2N DC12-24](#) [G3PE-215B-2H DC12-24](#) [DP4RSC60E60](#) [DRH3P60A20](#) [GNR45DCZ](#)  
[DP4R60D60B2](#) [DRC3R40E440](#) [DP4RSA60E40B](#) [DRH3P60A20R](#) [DRH3P60D20R](#) [DRC3P48D4112](#) [DRC3P48D433](#) [DRC3P48D4002](#)  
[DP4RSC60E40](#) [RGC1A23D25KGU](#) [RGC3A60A20KKE](#) [3RF2410-1AC45](#) [3RF2430-1AC45](#) [3TH4244-0BB4](#) [3TH4271-0BB4](#) [3TH4262-](#)  
[0BB4](#)