



łącznik pomocniczy 2 zestyki zwierne do wyłączników nadmiarowo-prądowych 5SL, 5SY, 5SP wyłącznik wbudowany 5TL1, RCBO 5SU1, RCCB 5SV (w przypadku 5SU1 złącze 5ST3805-1 wymagane)

Wersja	
Nazwa markowa produktu	SETRON
oznaczenie produktu	Pomocniczy wyłącznik prądu
wykonanie produktu	do zamontowania
wykonanie produktu fabrycznie montowany	Nie
żywoćność elektryczna (cykle łączeniowe) typowa	10 000
Napięcie	
napięcie izolacji wartość znamionowa	440 V
wytrzymałość na napięcie udarowe wartość znamionowa	4 kV
Napięcie zasilania	
napięcie zasilające przy DC wartość znamionowa	
• minimalny	12 V
napięcie robocze	
• wartość znamionowa	400 V
• przy AC wartość znamionowa minimalny	12 V
• przy DC wartość znamionowa minimalny	12 V
Stopień ochrony IP	IP20
Prąd sterujący	
rodzaj napięcia sterującego	AC/DC
Szczegóły produktu	
• element składowy produktu przełącznik pomocniczy	Tak
liczba styków alarmowych	0
liczba zestyków rozwiernych	0
liczba zestyków zwiernych	2
liczba zestyków przełącznych	0
rozszerzenie produktu możliwy do zamontowania	uniwersalny
rozszerzenie produktu	Łącznik pomocniczy
Połączenia	
przekrój możliwy do podłączenia przewodu	
• minimalny	0,5 mm <sup>2</sup>
• maksymalny	2,5 mm <sup>2</sup>
• moment dokręcania w przypadku przyłącza śrubowego maksymalny	1 N·m
rodzaj przekrojów poprzecznych możliwych do podłączenia przewodów przy przewodach AWG	24 ... 12
Konstrukcja mechaniczna	
wysokość	90 mm
szerokość	9 mm

głębokość	70 mm
liczba jednostek podziału szerokości	1
masa netto	66 g
<b>Warunki środowiskowe</b>	
norma	IEC/EN60947-5-1; IEC/EN62019
temperatura otoczenia podczas pracy	
• minimalny	-25 °C
• maksymalny	55 °C
temperatura otoczenia podczas magazynowania minimalny	-40 °C
<b>General Product Approval</b>	



[Confirmation](#)



[Miscellaneous](#)



Declaration of Conformity	Test Certificates	Marine / Shipping	other
---------------------------	-------------------	-------------------	-------



[Miscellaneous](#)



[Miscellaneous](#)

other	Railway	Environment
-------	---------	-------------

[Confirmation](#)

[Vibration and Shock](#)

[Confirmation](#)

[Environmental Confirmations](#)

**Więcej informacji**

**Siemens has decided to exit the Russian market (see here).**

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

**Siemens is working on the renewal of the current EAC certificates.**

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

**Informacje dotyczące opakowania**

[Informacje dotyczące opakowania](#)

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3011>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/pl/ps/5ST3011>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**




[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3011](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3011)


**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

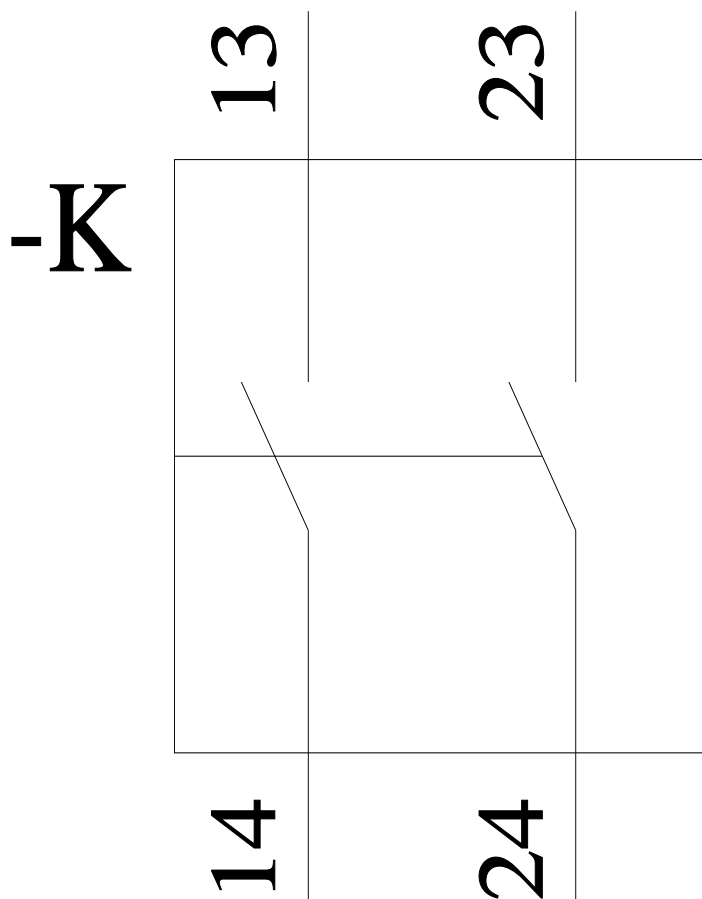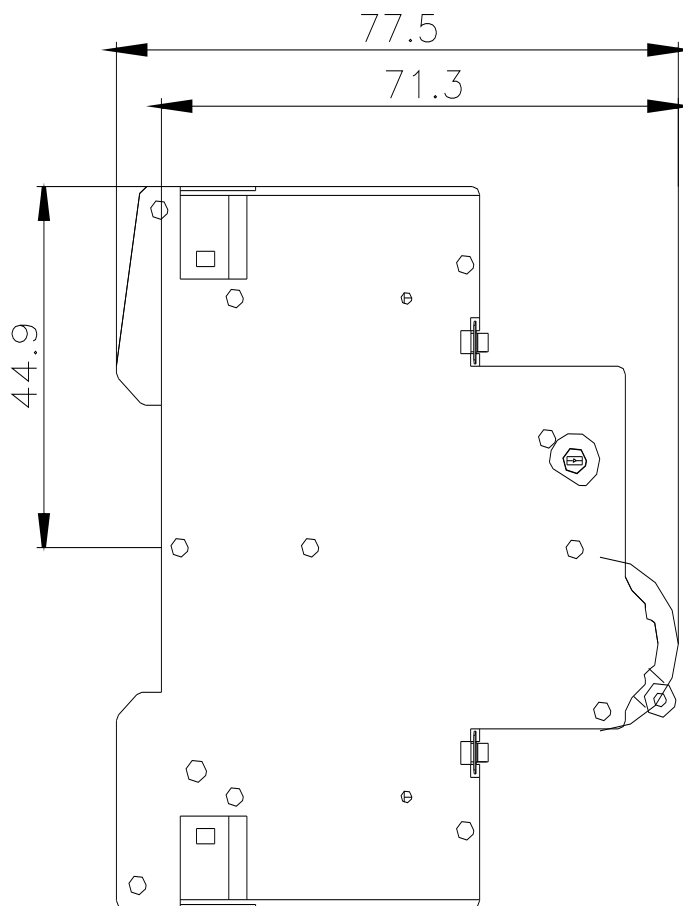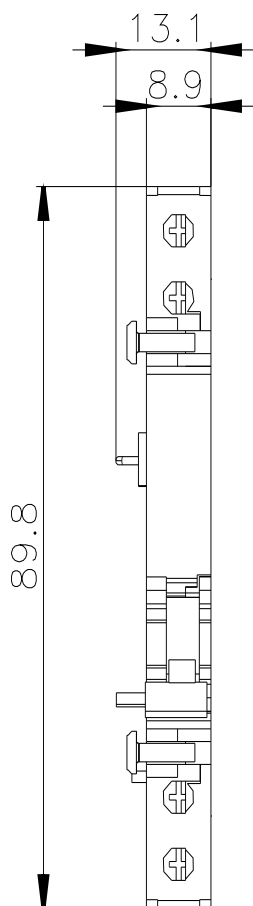

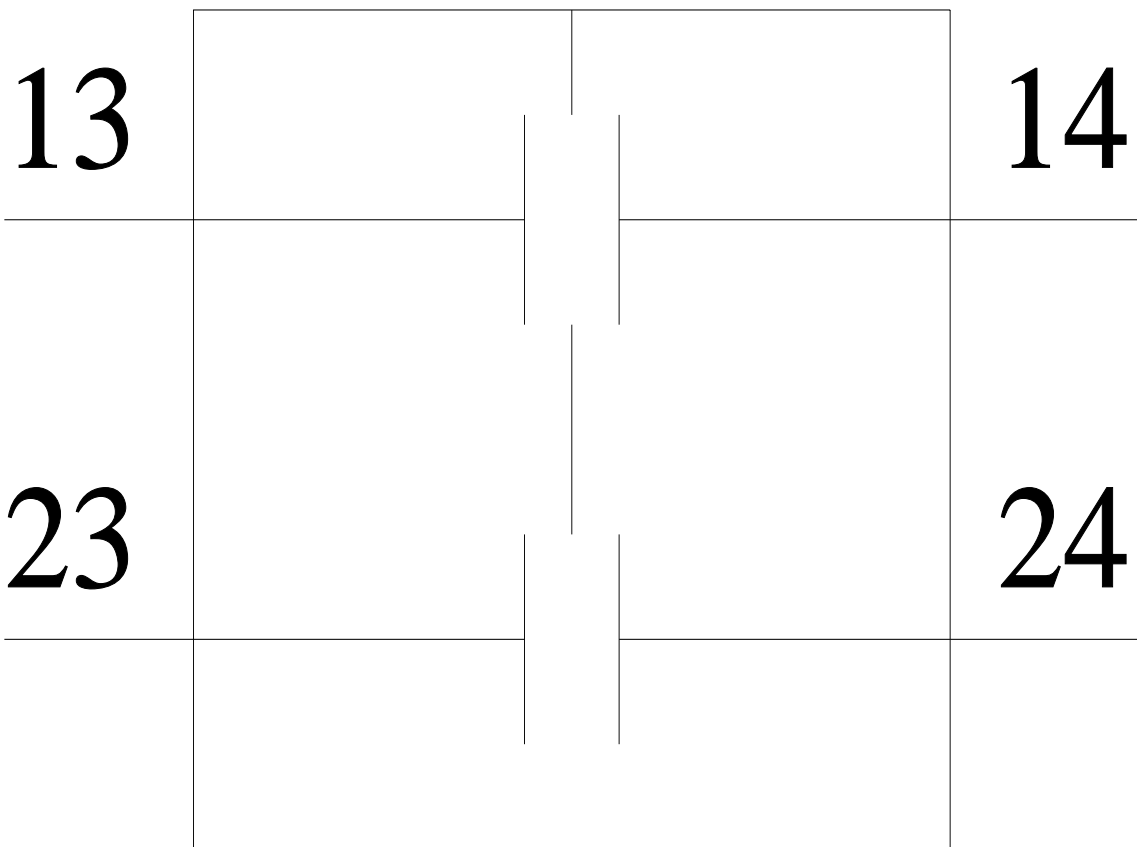

---

Ostatnia zmiana:

14.03.2023 



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Mounting Fixings](#) category:*

*Click to view products by [Siemens](#) manufacturer:*

Other Similar products are found below :

[5912235-1 REV](#) - [71-215091-8S](#) [75-69211-3P](#) [75-69214-6P](#) [75-69220-27S](#) [7717-8DAP](#) [85048GBESR](#) [PMS27488-001-01](#) [1-18023-0](#) [H-118-2](#) [1301790551](#) [BR16A](#) [NT20SATT01](#) [22594-8](#) [89078GBEPR](#) [89078GBESR](#) [9150700000](#) [SF4011-60101](#) [1671](#) [1855-54](#) [1996901-1](#) [2079844-1](#) [2193](#) [2518](#) [H-118-1](#) [BACC47CN2S](#) [LF9Z-1SB22](#) [WMLX-109](#) [364202K01V167](#) [ELXA051G1](#) [2547](#) [1453315-11](#) [71-452350-8S](#) [71-572965-8S](#) [75-69214-7J](#) [75-69811-3S](#) [H373247-15](#) [81517301](#) [P954-1](#) [860099-1](#) [1189-90](#) [1106352-2](#) [5D0515-20S REV A](#) [M39014/01-1570](#) [30809-700](#) [6024](#) [734032001](#) [197-007](#) [BRKT-ND](#) [197-003](#)