

Voltage relay T5570 AC 230/400V 2W 0.7/0.9 With transparent cap



Model	
Product brand name	SENTRON
Product designation	Voltage relay
General technical data	
Measurable voltage / at AC / initial value	253 V
Voltage	
Type of voltage / for actuation	AC
Type of voltage / for monitoring	AC
Adjustable voltage range / Full-scale value	161 V
Measurable voltage / at AC / Full-scale value	253 V
Current	
Adjustable voltage range / initial value	161 V
Control current	
Control supply voltage	
<ul style="list-style-type: none"> at AC / at 50 Hz / rated value / minimum 	230 V
<ul style="list-style-type: none"> at AC / at 50 Hz / rated value / maximum 	230 V
<ul style="list-style-type: none"> at AC / at 60 Hz / rated value / minimum 	230 V

• at AC / at 60 Hz / rated value / maximum 230 V

Auxiliary circuit

Number of CO contacts / for auxiliary contacts	2
Number of NC contacts / for auxiliary contacts	0
Number of NO contacts / for auxiliary contacts	0

Product function

Product function	
• Voltage window recognition 1 phase	No
• Voltage window recognition 3 phase	No
• Voltage window recognition DC	No
• Overvoltage detection 1 phase	No
• Overvoltage detection 3 phase	No
• Overvoltage detection DC	No
• undervoltage detection 1 phase	No
• undervoltage detection 3 phases	Yes
• undervoltage detection DC	No

Connections

Type of electrical connection	screw-type terminals
• Plug-in socket	No

Mechanical Design

Height	90 mm
Width	36 mm
Depth	64 mm

Certificates

Declaration of Conformity	other
----------------------------------	--------------



[Environmental Confirmations](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TT3402>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/5TT3402>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT3402

CAX-Online-Generator

<http://www.siemens.com/cax>

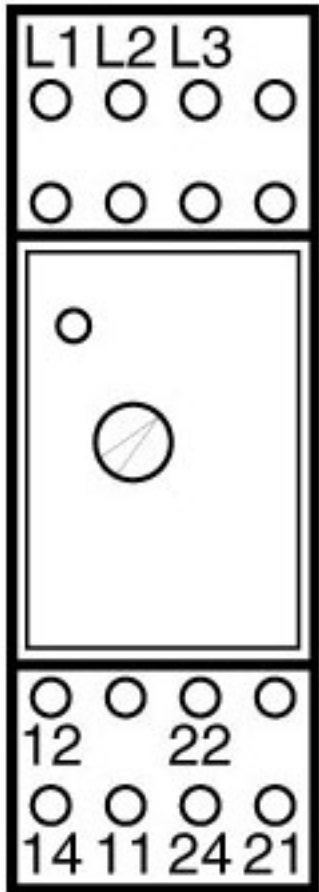

i2Y1_00482

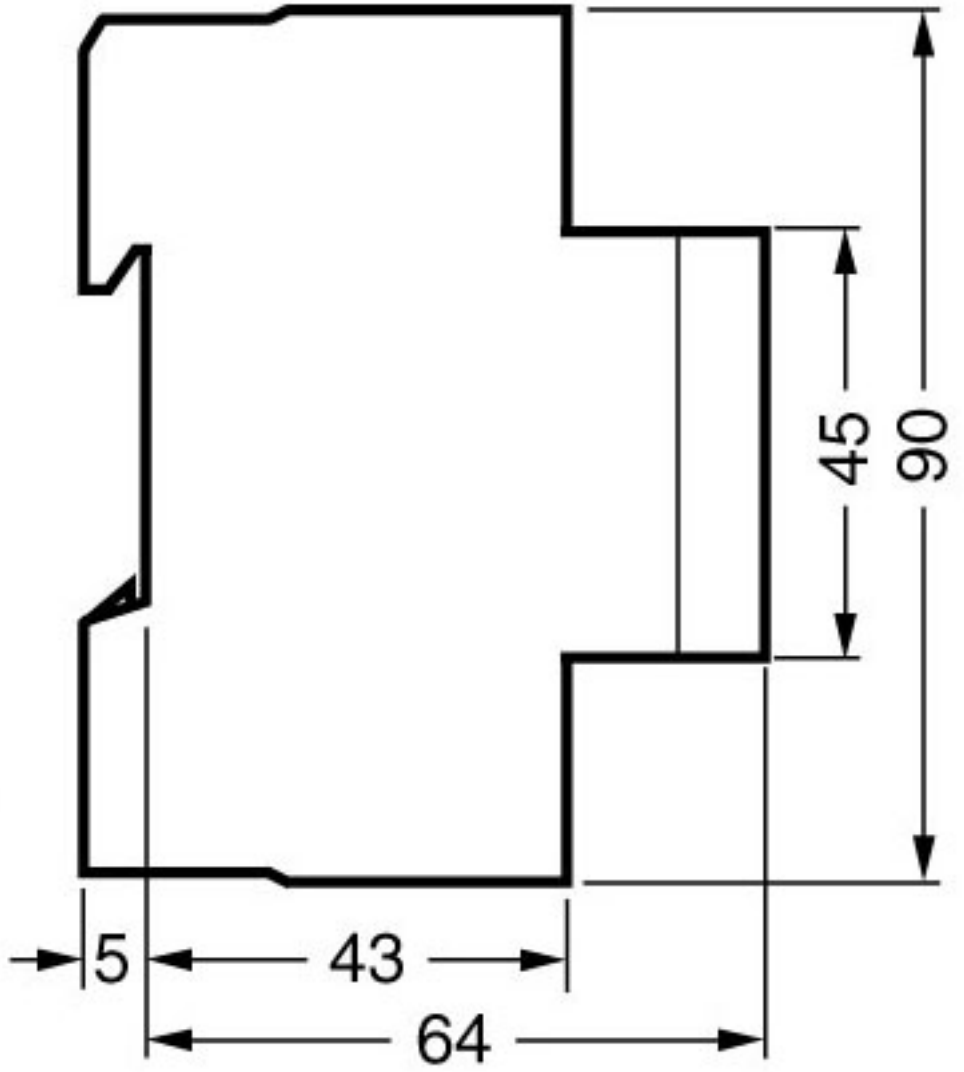

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Siemens](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)