


Vibration Speaker

Our Model No.		<u>SL-VS01</u> <u>4Ω10-25W 4FB C</u>		Product Model No:		
1	Applicable Scope					
1.1	Type	Resonance speaker				
1.2	Dimensions	50 mm				
1.3	Power	Nominal input 10 W, Maximum input 25W				
2	mechanical specification					
2.1	magnet magnet	Size: 25*3.5 N40 Size: 25*3.5 N40			Material :	
2.2	Total Weight	0.5kg				
3	Electrical specification					
3.1	Nominal Impedance	$4\Omega \pm 15\%$ test@200Hz1v				
3.2	LowestResonanceFrequency	58Hz±20% (@ 1.0 V)				
3.3	OutputsoundPressure Level	85±3 dB(100、400、800、12000Hz 的 medium value @1m 10w)				
3.4	Effective Frequency Band	Fo ~ 20KHz (average sensitivityfall 10dB)@2.0V 10 W				
3.5	Distortion	5% less @ 5W 1000Hz				
3.6	Sine Wave Test	9V 60~2.0K HZ Must be normal at sine wave				
3.7						
4.1	Load Test	Must be normal after load test :pink noise 10W 48 hours				



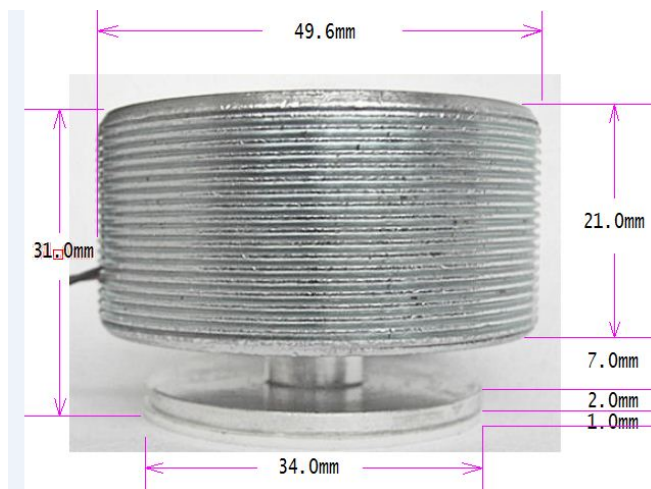

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Speakers & Transducers](#) category:

Click to view products by [SparkFun](#) manufacturer:

Other Similar products are found below :

[FC-30814-P127](#) [AS02832MR-2-R](#) [PB-1220PE](#) [PB-2015PQ](#) [SWFK-31736-000](#) [PT-2065FW](#) [PT-4175W](#) [PB-0927PQ](#) [MBS 3000-1811-A1AB08-0](#) [SMS2020-08H4.5 LF](#) [BDT1717-08H6.5W56MLF](#) [AS03608MR-LW100-R](#) [SP570445-4](#) [GSPK5010TN-4R2W](#) [GSPK5010TN-4R3W](#) [KLJ-1504R8W0.5-L44](#) [FS7423NB0430-H10.0](#) [FS50DS0430-H12.7 PEI](#) [FS3511NB0808-H6.7-R01](#) [FS66W04100-H31](#) [FS45DS0880-H24.8-R02](#) [FS32NS0820-H5.8-R01](#) [FS2112NB0807-H7.0-R01](#) [FS50DS0430-H13.3-R24](#) [FS3411P08-H4.0](#) [FS26NS0820-H4.9-R01](#) [FS14430NB0880-H30-R01](#) [FS5835DS0850-H19.4-R01](#) [FS2011NB0807-H3.9-R01](#) [FS28DS0820-H9.4-R01](#) [FS66W0850-H22](#) [FS40DS0830-H11.2-P2.0-L100](#) [FS28DS0830-H15.3](#) [FS102W0480-H35](#) [FS3525NS0820-H5.5-R01](#) [FS5035NB0820-H26.8-R01](#) [FS27DS0830-H10.8-R01](#) [FS3915NB0808-H11.5-R01](#) [FS3020NB0808-H4.0-R01](#) [FS3616NB0808-H10-R01](#) [FS3514NB0808-H6.0-R01](#) [FS40DS0450-H18.3](#) [FS77W0450-H23.5](#) [FS77W0850-H25.5](#) [FS78W0850-H34](#) [FS102W04200-H40](#) [FS3411P04-H4.0](#) [FS3232NB0820-H15.3-R01](#) [FS50DS0830-H12.7 PEI](#) [FS5630NB0830-H9.4-R01](#)