


REV	DESCRIPTION	DATE
A	GSM-IPX/SMA-200	

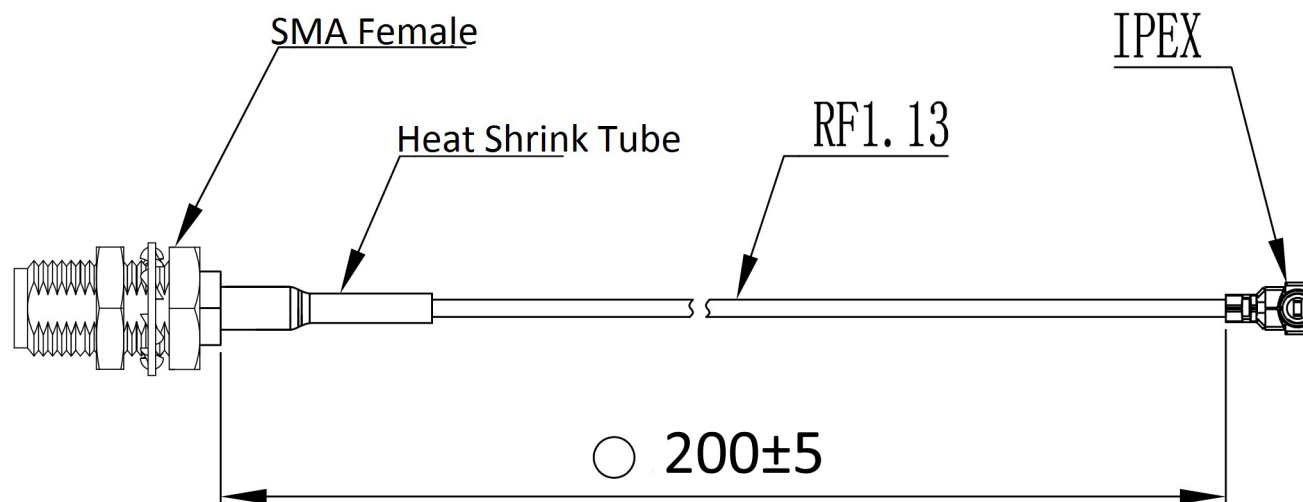

Electrical Performance

- 1 Impedance: 50 ohms
- 2 Frequency Range: 0~5GHz
- 3 V.S.W.R: ≤ 2.0
- 4 Operating Voltage: 300 Vrms Max.
- 5 Insulator Resistance: 10 Megohms Min.
- 6 Operating Temperature: $-40^{\circ}\text{C} \sim +90^{\circ}\text{C}$
- 7 Open and Short Test

DRAWN BY	Jimmy	DRAWING NO.	
CHECKED BY		SCALE	
APPROVED BY		UNIT	mm
SORTING NO.		PAGE	1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [SR Passives](#) manufacturer:

Other Similar products are found below :

[930-033-R](#) [EXE902SM](#) [APAMPG-117](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [108-00016-050](#)
[SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1049B090](#) [TRABT1560](#) [W3118A](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [0600-00060](#) [Y4503](#) [GD5W-](#)
[28P-NF](#) [PAL90209H-FNF](#) [GD53-25](#) [C37](#) [MAF94051](#) [S9025PLSMF](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MIKROE-2393](#) [DA5-](#)
[32RADOME](#) [BB1442NR](#) [5200227](#) [GPSCPMM00](#) [ANTDOM-05-01-WPM](#) [ANT-WP868SMA-Y](#) [EXW30BNX](#)
[OSCAR1A/5M/SMAM/S/S/31](#) [ALPHA4A/1M/SMAM/S/S/26](#) [OSCAR1A/10M/SMAM/S/S/31](#) [OSCAR1A/20M/SMAM/S/S/31](#)
[OSCAR40/5M/LL/SMAM/S/S/33](#) [OSCAR40/10M/LL/SMAM/S/S/33](#) [TANGO41/1M/SMAM/S/S/32](#) [ANTX100ETBAB24553](#)
[S4908WBFNM](#) [GD57-21](#) [001-0016](#) [5700028](#) [108-20131-010](#) [108-00032-010](#)