

# SMD Power Inductor CDRH10D60B/T150



## Description


- Ferrite drum core construction
- Magnetically shielded
- Qualified AEC-Q200
- Operating Temperature: -55°C to +150°C (including self-heating)




## Applications

- LED Head light for Automobile
- ECU, DC/DC converter
- Automotive and other high temperature, high reliability application


## Dimension [mm]

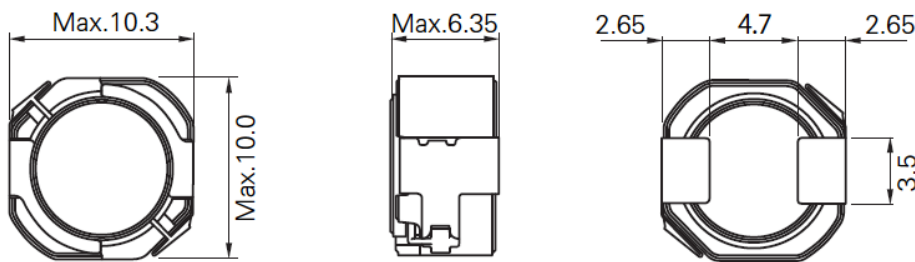


## Reference Land pattern [mm]

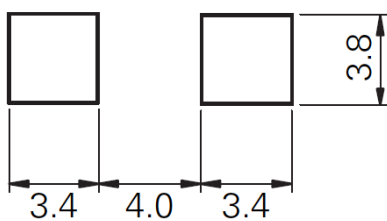

## Stamp Example

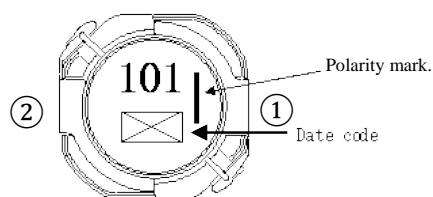

## Connection (Bottom View)

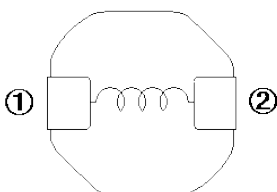

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

# SMD Power Inductor CDRH10D60B/T150



## Electrical Characteristics

Part No.	Inductance ( $\mu$ H) ※1	D.C.R (m $\Omega$ ) ( $\pm$ 30%)	Saturation Current (A) at 20°C TYP. ※2	Temperature Rise Current (A) TYP. ※3
CDRH10D60BT150NP -R80NC	0.8 $\pm$ 30%	5.4	21.2	12.6
CDRH10D60BT150NP -1R3NC	1.3 $\pm$ 30%	6.2	17.0	11.3
CDRH10D60BT150NP -2R0NC	2.0 $\pm$ 30%	7.1	13.6	10.9
CDRH10D60BT150NP -2R7NC	2.7 $\pm$ 30%	8.5	11.7	10.4
CDRH10D60BT150NP -4R7NC	4.7 $\pm$ 30%	12.0	8.80	8.50
CDRH10D60BT150NP -6R8NC	6.8 $\pm$ 30%	15.0	7.40	7.90
CDRH10D60BT150NP -100MC	10 $\pm$ 20%	17.0	6.20	6.90
CDRH10D60BT150NP -150MC	15 $\pm$ 20%	30.0	4.90	5.30
CDRH10D60BT150NP -220MC	22 $\pm$ 20%	43.0	4.10	4.35
CDRH10D60BT150NP -330MC	33 $\pm$ 20%	57.0	3.35	3.75
CDRH10D60BT150NP -470MC	47 $\pm$ 20%	74.0	2.82	3.45
CDRH10D60BT150NP -680MC	68 $\pm$ 20%	88.0	2.36	3.10
CDRH10D60BT150NP -101MC	100 $\pm$ 20%	160	1.92	2.30
CDRH10D60BT150NP -151MC	150 $\pm$ 20%	250	1.60	1.75
CDRH10D60BT150NP -221MC	220 $\pm$ 20%	350	1.32	1.55
CDRH10D60BT150NP -331MC	330 $\pm$ 20%	515	1.06	1.15
CDRH10D60BT150NP -471MC	470 $\pm$ 20%	770	0.88	1.00

※ Measuring frequency inductance at 100kHz,1V.

※ Saturation current: DC current which becomes inductance value drop by 30% from the nominal value.

※ Temperature rise current: The value of D.C. current when the temperature of coil becomes  $\Delta T=40^{\circ}\text{C}$  ( $T_a=20^{\circ}\text{C}$ ).

Please note that when using the product for automotive while applying current with audio-frequency (AF) signals may result in audible noises due to magnetostriction. Also, in order to avoid noise problem, operating with Non-AF signals would be recommended. The noise may amplify depending on the coil mount area on the PCB.


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

# SMD Power Inductor CDRH10D60B/T150




Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) —  $\Delta T$


CDRH10D60BT150NP-R80NC

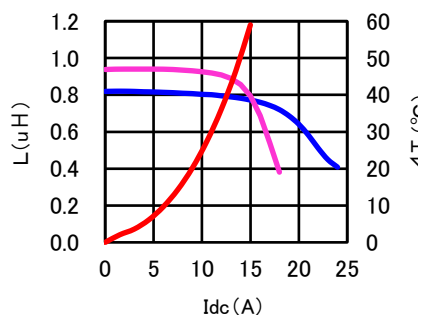


CDRH10D60BT150NP-1R3NC

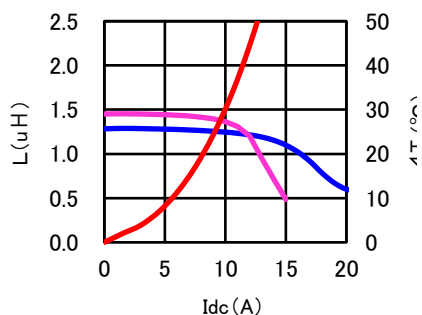


CDRH10D60BT150NP-2R0NC

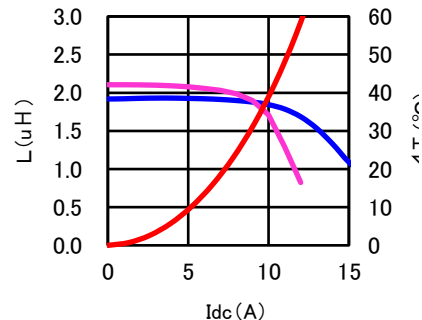


CDRH10D60BT150NP-2R7NC

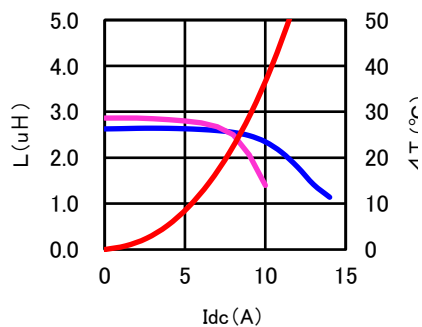


CDRH10D60BT150NP-4R7NC

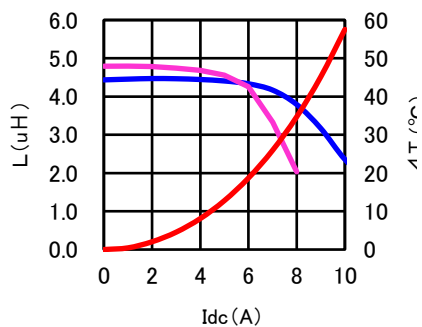


CDRH10D60BT150NP-6R8NC

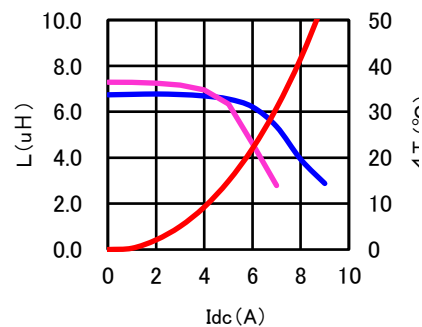


CDRH10D60BT150NP-100MC

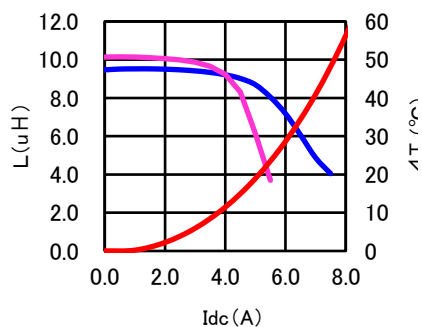

CDRH10D60BT150NP-150MC

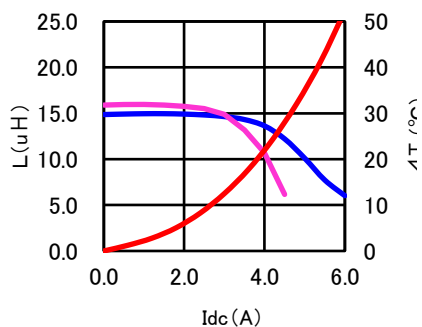

CDRH10D60BT150NP-220MC

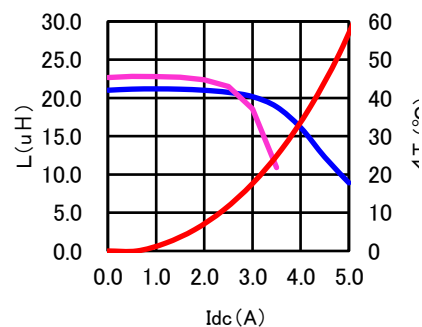

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.


# SMD Power Inductor

## CDRH10D60B/T150




Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) —  $\Delta T$


CDRH10D60BT150NP-330MC

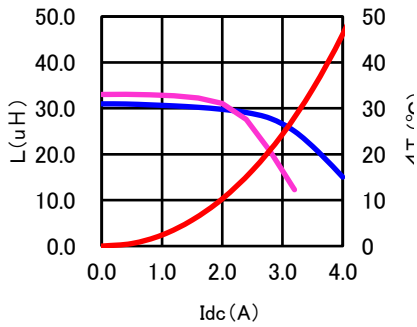


CDRH10D60BT150NP-470MC

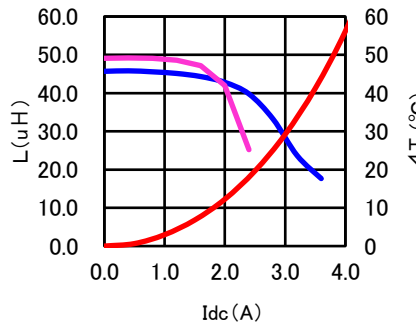


CDRH10D60BT150NP-680MC

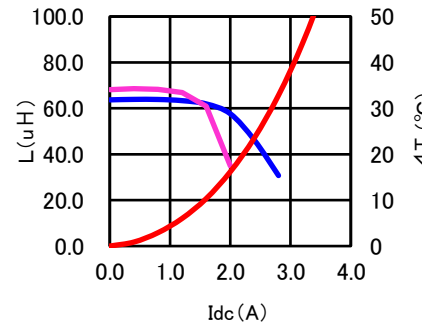


CDRH10D60BT150NP-101MC

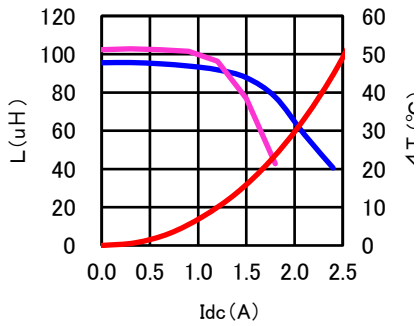


CDRH10D60BT150NP-151MC

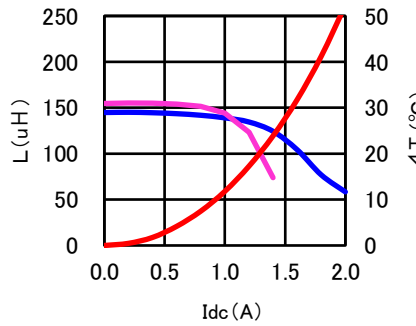


CDRH10D60BT150NP-221MC

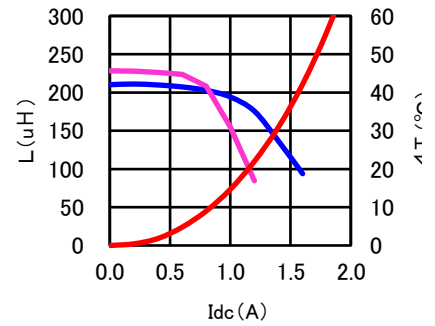

CDRH10D60BT150NP-331MC

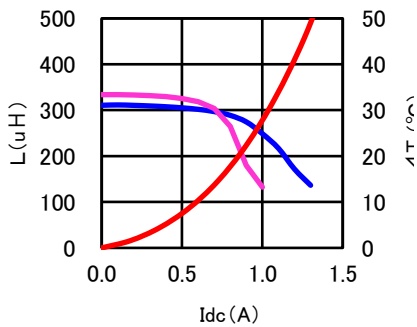

CDRH10D60BT150NP-471MC

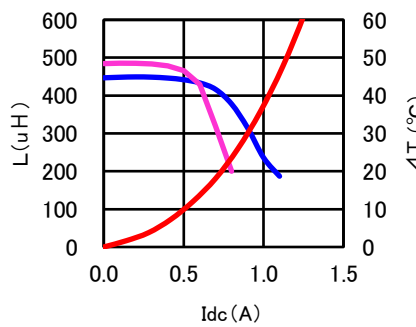

For sales office information, please [click here](#) to visit our website.

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Sumida](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)  
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)  
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)  
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)  
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)  
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)