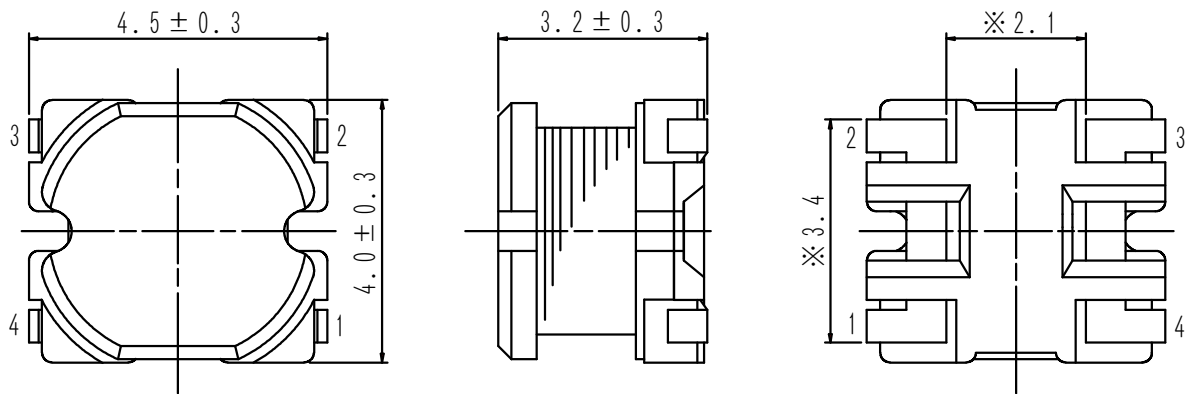
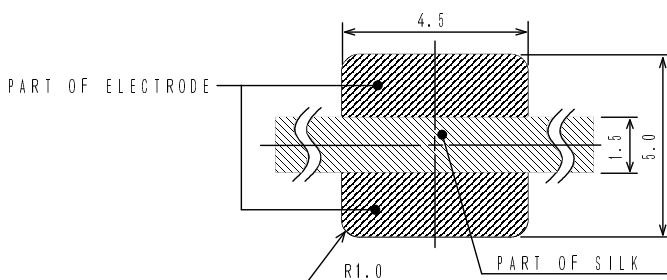


Type: CR43
◆ Product Description

- 4.8×4.3mm Max.(L×W), 3.5mm Max. Height.
- Inductance range: 1.0~68 μ H.
- Rated current range: 0.37~2.56A.
- In addition to the standard versions of inductors shown here, custom inductors are available to meet your exact requirements.



◆ Feature

- Magnetically unshielded construction.
- Storage temperature range: -40°C ~+100°C.
- Operating temperature range: -40°C ~+100°C (Including coil's self temperature rise).
- Ideally used in A/V equipment, LCD TV,DSC/DVC, Game Machine, DVC, HDD, Notebook PC, etc as DC-DC converter inductors.
- RoHS Compliance and Halogen Free.

◆ Dimensions (mm)

◆ Land Pattern (mm)


Type: CR43
◆ Specification

Part Name ※	Stamp	Inductance (μ H) ※ 1	D.C.R. (Ω) [Max.] (at 20°C)	Rated Current (A) ※2	S.R.F. [Typ.] (MHz)
CR43NP-1R0M□	1R0	1.0±20%	48.7m	2.56	152.8
CR43NP-1R4M□	1R4	1.4±20%	56.2m	2.52	112.7
CR43NP-1R8M□	1R8	1.8±20%	63.7m	1.95	77.8
CR43NP-2R2M□	2R2	2.2±20%	71.2m	1.75	68.3
CR43NP-2R7M□	2R7	2.7±20%	78.7m	1.58	64.0
CR43NP-3R3M□	3R3	3.3±20%	86.2m	1.44	60.0
CR43NP-3R9M□	3R9	3.9±20%	93.7m	1.33	52.6
CR43NP-4R7M□	4R7	4.7±20%	108.7m	1.15	49.3
CR43NP-5R6M□	5R6	5.6±20%	125.7m	0.99	44.2
CR43NP-6R8M□	6R8	6.8±20%	131.2m	0.95	42.3
CR43NP-8R2M□	8R2	8.2±20%	146.2m	0.84	34.8
CR43NP-100M□	100	10±20 %	0.182	1.04	34.8
CR43NP-120M□	120	12±20 %	0.210	0.97	30.5
CR43NP-150M□	150	15±20 %	0.235	0.85	28.0
CR43NP-180M□	180	18±20 %	0.338	0.74	26.8
CR43NP-220M□	220	22±20 %	0.378	0.68	23.0
CR43NP-270M□	270	27±20 %	0.522	0.62	20.6
CR43NP-330K□	330	33±10 %	0.540	0.56	19.3
CR43NP-390K□	390	39±10 %	0.587	0.52	17.3
CR43NP-470K□	470	47±10 %	0.844	0.44	16.6
CR43NP-560K□	560	56±10 %	0.937	0.42	14.5
CR43NP-680K□	680	68±10 %	1.117	0.37	13.3

※ Description of part name


※1: Measuring frequency: 1.0 μ H ~ 8.2 μ H ; at 7.96 MHz
 10 μ H ~ 68 μ H ; at 2.52 MHz

※2: Rated current: The D.C. current at which the inductance decreases to 90% of its initial value or when $\Delta t=40^\circ\text{C}$, whichever is lower ($T_a=20^\circ\text{C}$).

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)