


Wire Wound Ferrite Chip Antenna – MTNF Series

Operating Temp. : -40°C~+85°C



FEATURES

- Small chip suitable for surface mounting
- Automated process and stable quality

APPLICATIONS

- Antenna coil for NFMI
- Wireless earphone

PRODUCT IDENTIFICATION

MTNF

①

5520

②

F

③

S

④

3R7

⑤

J

⑥

T

⑦

F

⑧

□□□

⑨

①	Type
MTNF	Wire Wound Chip Antenna

②	External Dimensions(L×W) [mm]
5520	5.5×2.0
6030	6.0×3.0
6040	6.0×4.0

③	Material Code
F	Ferrite

④	Feature Type
S	Standard

⑤	Nominal Inductance
Example	Nominal Value
3R7	3.7μH


⑥	Inductance Tolerance
J	±5%

⑦	Packing
T	Tape & reel

⑧	Hazardous Substance Free Products
J	±5%

⑨	Design Code
□□□	Design Code
*Standard product is blank	

SHAPE AND DIMENSIONS

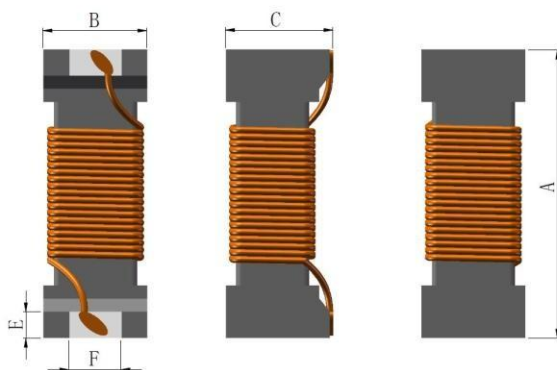

Unit: mm

Series	A	B	C	E	F	H Typ.	I Typ.	J Typ.
MTNF5520	5.5±0.20	2.0±0.20	2.0±0.20	0.50±0.10	1.0±0.10	1.10	0.60	4.40
MTNF6030	6.2±0.20	3.0±0.20	2.0±0.20	0.50±0.10	1.0±0.10	1.10	0.60	5.10
MTNF6040	6.2±0.20	4.0±0.20	2.0±0.20	0.50±0.10	1.5±0.10	1.60	0.60	5.10

SPECIFICATIONS

MTNF Series

Part Number	Inductance	Min. Quality Factor	L/Q Test Freq.
Units	μH	-	MHz
Symbol	L	Q	Freq.
MTNF5520FS3R7JTFY01	3.7 \pm 5%	50	10.6
MTNF6030FS3R7JTFY01	3.7 \pm 5%	50	10.6
MTNF6040FS3R7JTFY01	3.7 \pm 5%	50	10.6
MTNF5520FS3R7JTFY21	3.7 \pm 5%	50	20

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Sunlord](#) manufacturer:

Other Similar products are found below :

[CCT FM1](#) [ABFT](#) [AD-NM-SMAF 001-0021](#) [CTC110](#) [MAF94149](#) [EXE902SF](#) [MMCX-SMA-100](#) [PDQ24496-91NF](#) [GAN30084EU](#) [930-033-R](#) [A08-HABUF-P5I](#) [AAF95035](#) [DG-ANT-20DP-BG-B](#) [APAMPGJ-141](#) [1513563-1](#) [OF86315-FNF](#) [OP24516DS-91NM](#) [A09-HASM-7](#) [EXE902MD](#) [EXE902SM](#) [SPDA17806/2170LAR](#) [APAMPG-117](#) [GPS1575SP26-004](#) [GPS15MGSMA](#) [CMD69273P-30NF](#) [CMQ69273-30NF](#) [RD2458-5-OTDR-NM](#) [RD2458-5-RSMA](#) [TRAB24/49003](#) [W4120ER5000](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [SPDA17RP918](#) [OP24516SX-91NM](#) [OP24516SX-91RSMM](#) [CMQ69273P-30NF](#) [CMS69273-30NF](#) [CMS69273P-30NF](#) [TRAB24003N](#) [TRAB24003NP](#) [TRAB8213NP](#) [TRAB8903](#) [A09-Y8NF](#) [A09-Y11NF](#) [A09-HSM-7](#) [A09-F8NF-M](#) [A09-F5NF-M](#)