



用户		品名	插件电感
料号	SLP0810R-102MTT	品号	

1 外形尺寸 (mm)

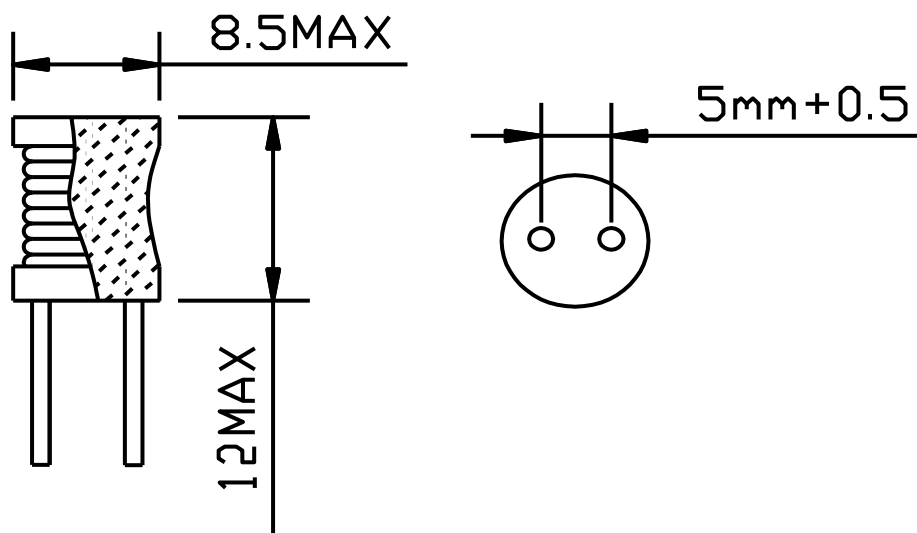

备注：外包 UL 套管

电气原理图：

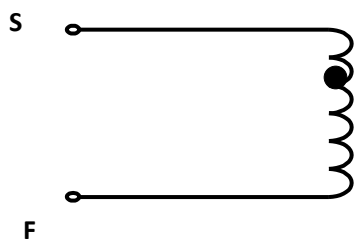

用户		品名	插件电感
料号	SLP0810R-102MTT	品号	

绕线

序号	项目	脚位	线径	圈数	备注
1	绕线	S-F	0.21	170TS	顺时针绕

电气特性

序号	项目	测试端子	技术要求	备注
1	电感	1-2	1MH±10%	1KHz, 0.25V
2	电流	1-2	0.5A MAX	7220
3	直流电阻	1-2	1.8 欧	1KHz, 0.25V

材料明细表:

序号	项目	材料规格型号	生产厂家	备注
1	磁芯	DR2W 8×10	SHENG ZHENG YANGGUANGDA ELECTRONICS CO.,LTD 或等同厂家	
2	导线	2UEW	DONG YANG CO ., LTD SHANGHAI ASLA PACIFIC ELECTRIC CO LTD 或等同厂家	E102761(S) E214423
3	套管	PE 125 度	SHENZHEN DELIKANG PYROCONDENSATION MATLRIAL CO.,LTD 或同等厂家	E239589

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sunltech](#) manufacturer:

Other Similar products are found below :

[CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#)