



Metal thin film chip resistors (precision)

■ RR series

Features

- Excellent characteristics in resistance tolerance, temperature coefficient of resistance, current noise, and linearity


Applications

- Any electronics applications that require accuracy and reliability such as automotive electronics, industrial test and measurement, consumer electronics and many others.

Specifications

* Stocked items: E-24 series (TCR P and Q, resistance tolerance D), other E-24 and E-96 series are made to order.

Dimensions



unit : mm

| Dimension (inch) | RR0306 (0201) | RR0510 (0402) | RR0816 (0603) | RR1220 (0805) | RR1632 (1206) | RR2632 (1210) |
|------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| L | 0.60±0.05 | 1.00±0.05 | 1.60±0.20 | 2.00±0.20 | 3.20±0.20 | 3.20±0.20 |
| W | 0.30±0.05 | 0.50±0.05 | 0.80±0.20 | 1.25±0.20 | 1.60±0.20 | 2.60±0.20 |
| A | 0.12±0.05 | 0.20±0.10 | 0.30±0.20 | 0.40±0.20 | 0.50±0.20 | 0.50±0.20 |
| B | 0.12±0.05 | 0.25±0.05 | 0.30±0.20 | 0.40±0.20 | 0.45±0.20 | 0.45±0.20 |
| T | 0.23±0.03 | 0.35±0.05 | 0.40±0.10 | 0.40±0.10 | 0.40±0.10 | 0.40±0.10 |


Electrical characteristics

| Series name | RR0306 | | RR0510 | | RR0816 | | RR1220 | | RR1632 | | RR2632 | | | |
|--|-------------|--------|------------|----------|--------|----------|--------|--------|--------|-------|----------|-------|-------|----------|
| power | 1/20W | | 1/16W | | 1/16W | | 1/10W | | 1/8W | | 1/4W | | | |
| E series offered | E-24 | | E-24, E-96 | | | | | | | | | | | |
| Resistance range (Ω) | 10~30 | 33~22k | 10~91 | 100~100k | 10~91 | 100~360k | 10~91 | 100~1M | 10~47 | 51~1M | 100~200k | 10~47 | 51~1M | 100~200k |
| Resistance tolerance (%) | ±0.1% (B) | — | — | — | — | — | — | — | — | — | ○ | — | — | ○ |
| | ±0.5% (D) | — | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | — | ○ | ○ | — |
| | ±1.0% (F) | ○ | — | — | — | — | — | — | — | — | — | — | — | — |
| Temperature coefficient of resistance (ppm/°C) | ±5 (V) | — | — | — | — | — | — | — | — | — | ○ | — | — | ○ |
| | ±10 (N) | — | — | — | — | — | — | — | — | — | ○ | — | — | ○ |
| | ±25 (P) | — | ○ | — | ○ | — | ○ | — | ○ | — | ○ | — | ○ | ○ |
| | ±50 (Q) | — | — | — | — | ○ | — | ○ | — | ○ | — | ○ | — | — |
| | ±100 (R) | ○ | — | ○ | — | — | — | — | — | — | — | — | — | — |
| Maximum voltage | 15V | | 25V | | 75V | | 100V | | 150V | | 200V | | | |
| Operating temperature | -55°C~125°C | | | | | | | | | | | | | |
| Packaging | 5,000pcs | ○ | — | — | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| | 10,000pcs | — | — | ○ | — | — | — | — | — | — | — | — | — | — |

Contact us for the jumper resistor in RR0816 size (part number: RL0816-JMP)

Part numbering system

RR 0816 P - 102 - D - (M) - (T5) - (*)** — Only given to 3 digit codes for RR0816 E-96 series

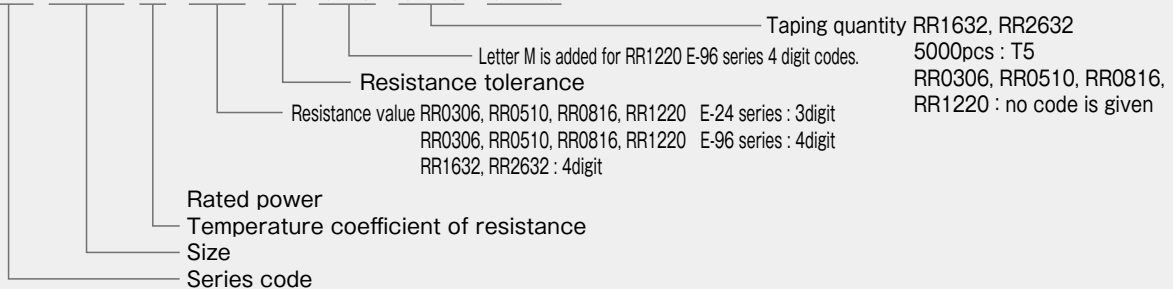

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multilayer Ceramic Capacitors MLCC - SMD/SMT](#) category:

Click to view products by [Susumu](#) manufacturer:

Other Similar products are found below :

[M39014/01-1467](#) [M39014/02-1218V](#) [M39014/02-1225V](#) [M39014/02-1262V](#) [M39014/02-1301](#) [M39014/22-0631](#) [1210J5000102JCT](#)
[1210J2K00102KXT](#) [1210J5000103KXT](#) [1210J5000223KXT](#) [D55342E07B379BR-TR](#) [D55342E07B523DR-T/R](#) [1812J1K00103KXT](#)
[1812J1K00473KXT](#) [1812J2K00680JCT](#) [1812J4K00102MXT](#) [1812J5000102JCT](#) [1812J5000103JCT](#) [1812J5000682JCT](#) [NIN-FB391JTRF](#)
[NIN-FC2R7JTRF](#) [NPIS27H102MTRF](#) [C1206C101J1GAC](#) [C1608C0G1E472JT000N](#) [C2012C0G2A472J](#) [2220J2K00101JCT](#)
[KHC201E225M76N0T00](#) [LRC-LRF1206LF-01R025FTR1K](#) [1812J1K00222JCT](#) [1812J2K00102KXT](#) [1812J2K00222KXT](#)
[1812J2K00472KXT](#) [2-1622820-7-CUT-TAPE](#) [2220J3K00102KXT](#) [2225J2500824KXT](#) [CCR07CG103KM](#) [CGA2B2C0G1H010C](#)
[CGA2B2C0G1H040C](#) [CGA2B2C0G1H050C](#) [CGA2B2C0G1H060D](#) [CGA2B2C0G1H070D](#) [CGA2B2C0G1H151J](#) [CGA2B2C0G1H1R5C](#)
[CGA2B2C0G1H2R2C](#) [CGA2B2C0G1H3R3C](#) [CGA2B2C0G1H680J](#) [CGA2B2C0G1H6R8D](#) [CGA2B2X8R1H221K](#) [CGA2B2X8R1H472K](#)
[CGA3E1X7R1C474K](#)