



MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM Tx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-897M50-D4DC	Version 2.1 d	

Table 1 Electrical Specification

Passband : 880 ~ 915 MHz						
Item	Condition (MHz)	Specification			Unit	Remark
		Min.	Typ.	Max.		
Insertion Loss	880 ~ 915	-	2.2	3.1	dB	
Ripple	880 ~ 915	-	1.1	1.9	dB	
Absolute attenuation	DC ~ 860	30	56	-	dB	
	860 ~ 870	18	33	-	dB	
	925 ~ 935	10	16	-	dB	
	935 ~ 960	24	29	-	dB	
	1760 ~ 1830	40	54	-	dB	
	2640 ~ 2745	30	45	-	dB	
VSWR(Input)	880 ~ 915	-	1.9	2.4	-	
VSWR(Output)	880 ~ 915	-	1.8	2.4	-	
Input Impedance	Unbalanced	50			ohm	
Output Impedance	Unbalanced	50			ohm	
Input Power	880 ~ 915	-	-	+12	dBm	
Operating temperature		-30 ~ +85			°C	
Device size		1.4typ. x 1.0typ. x 0.50max.			mm	




MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM Tx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-897M50-D4DC	Version 2.1 d	

Dimension

Device size: 1.4typ. x 1.0typ. x 0.50max.

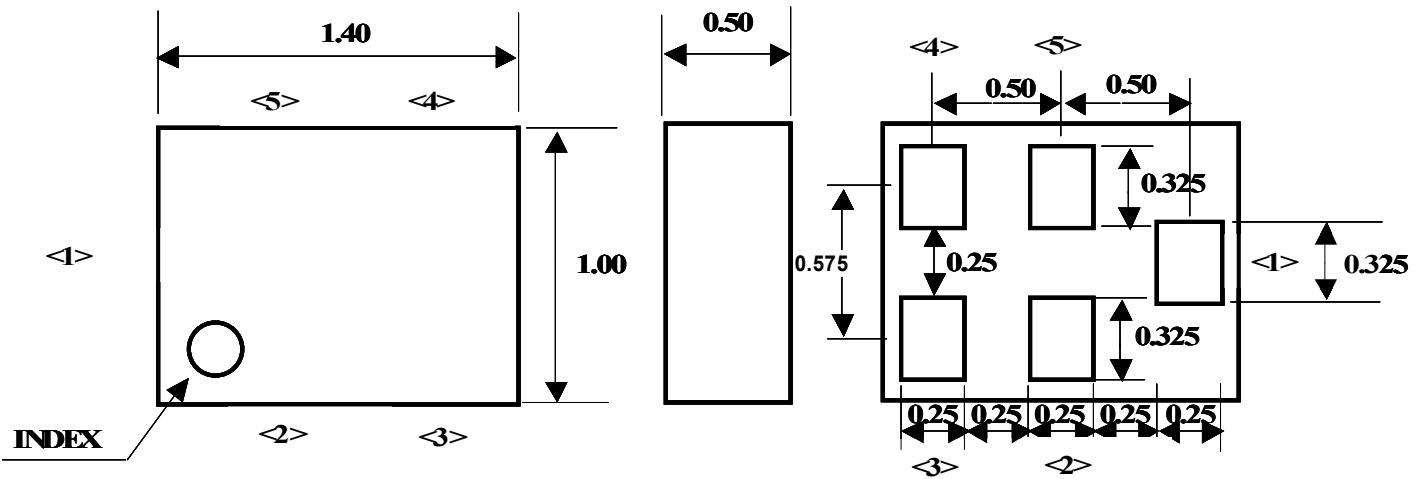


Unit: mm

Pin Configuration

Pin No.	Symbol	Function
1	IN	Unbalanced pin
2	GND	Ground
3	GND	Ground
4	OUT	Unbalanced pin
5	GND	Ground

Evaluation Circuit

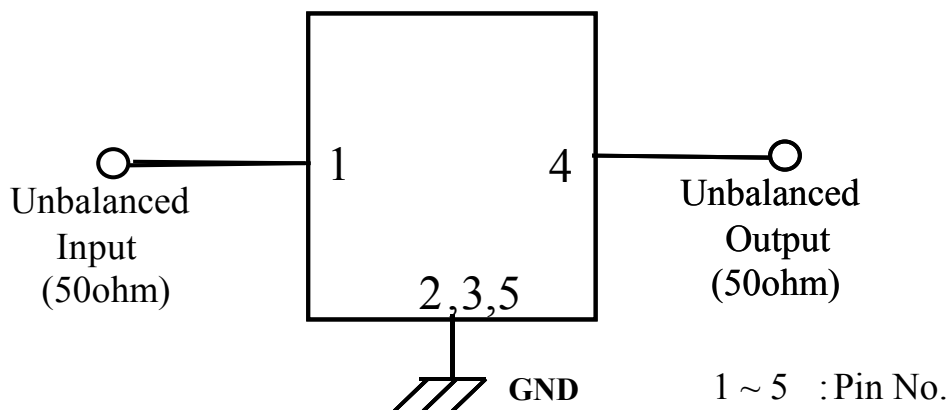



MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM Tx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-897M50-D4DC	Version 2.1 d	

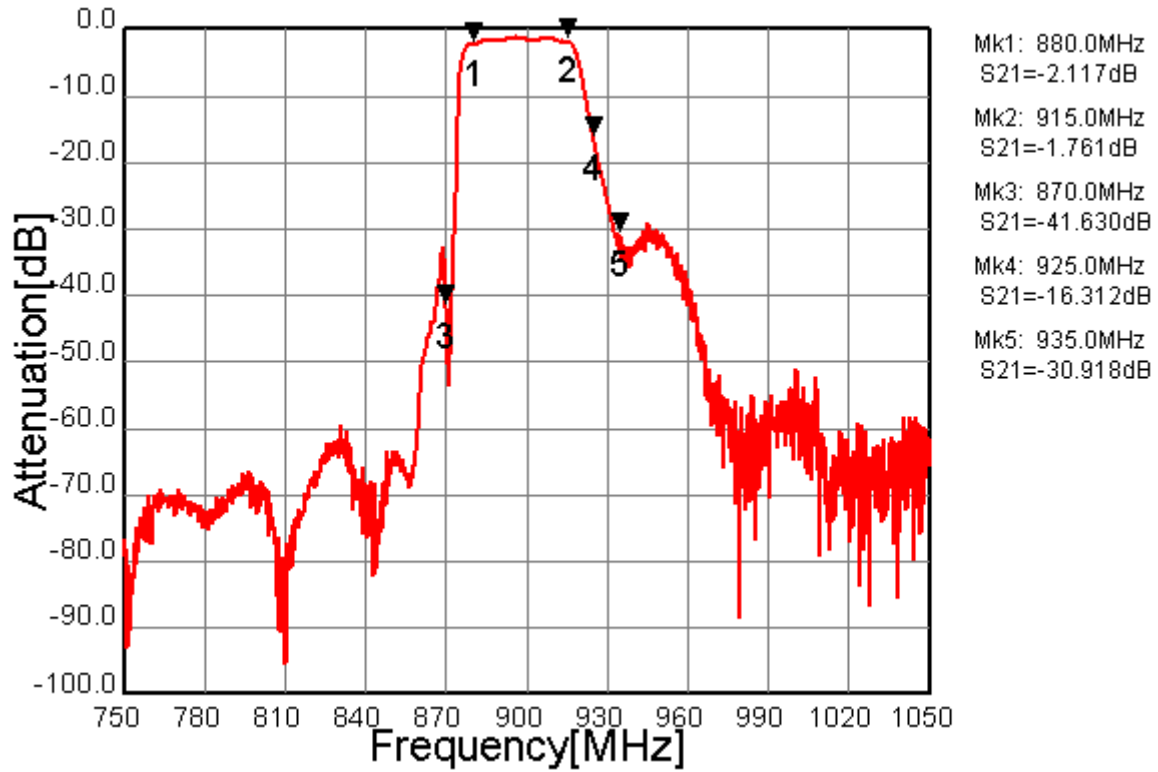


Fig.1 Pass-band Characteristics

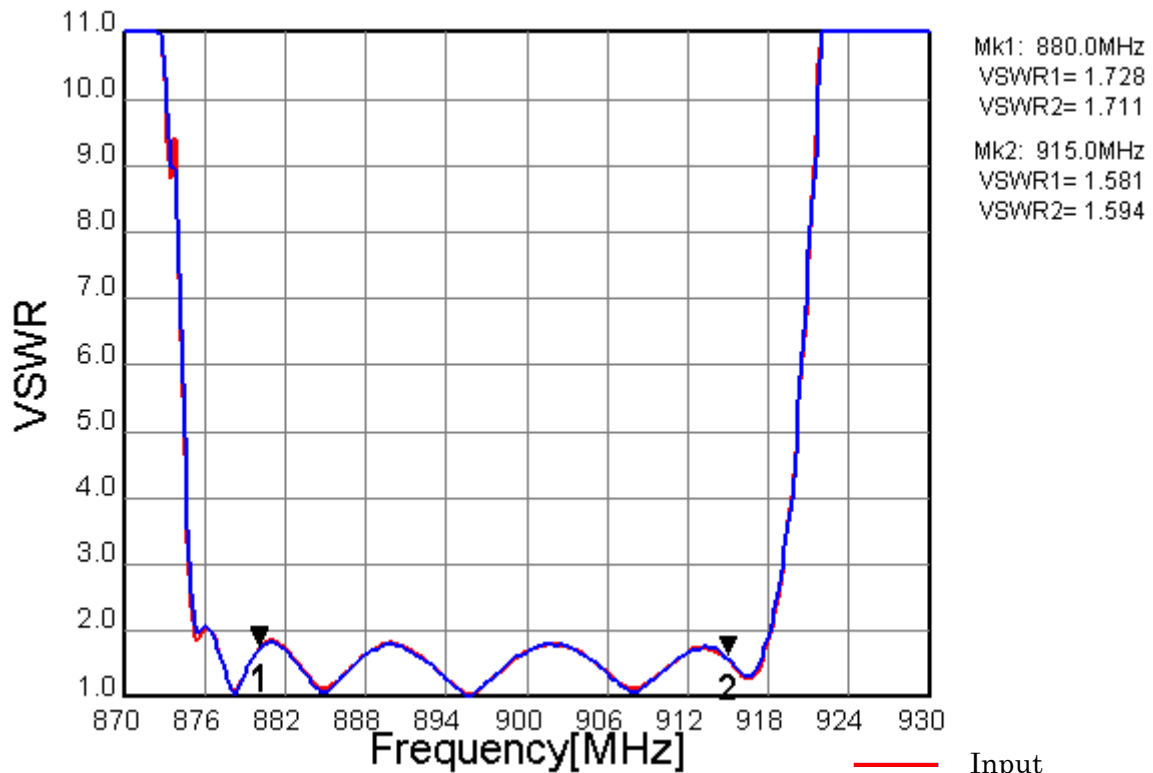


Fig.2 VSWR

— Input
— Output



MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM Tx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-897M50-D4DC	Version 2.1 d	

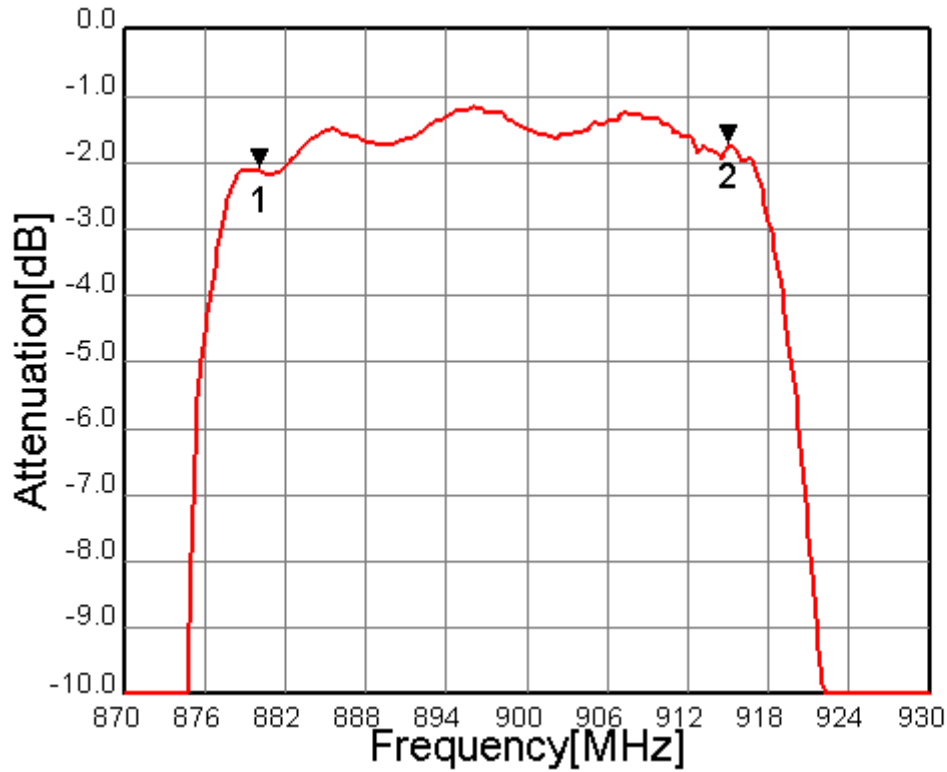


Fig.3 In-band Characteristics

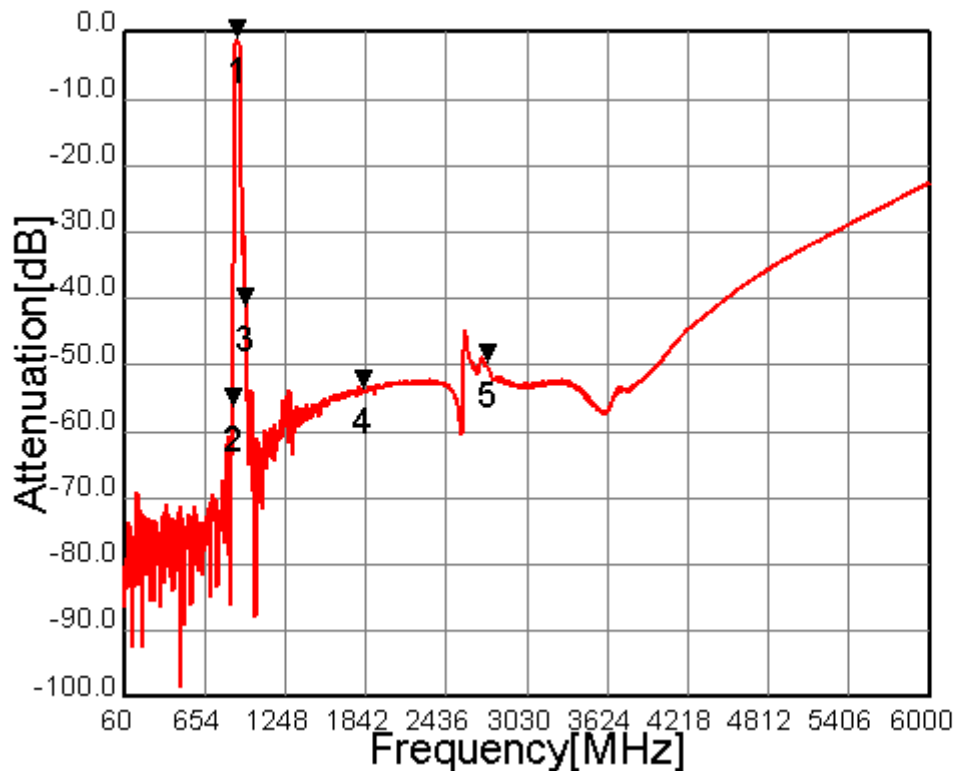


Fig.4 Wide-band Characteristics



MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM Tx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-897M50-D4DC	Version 2.1 d	

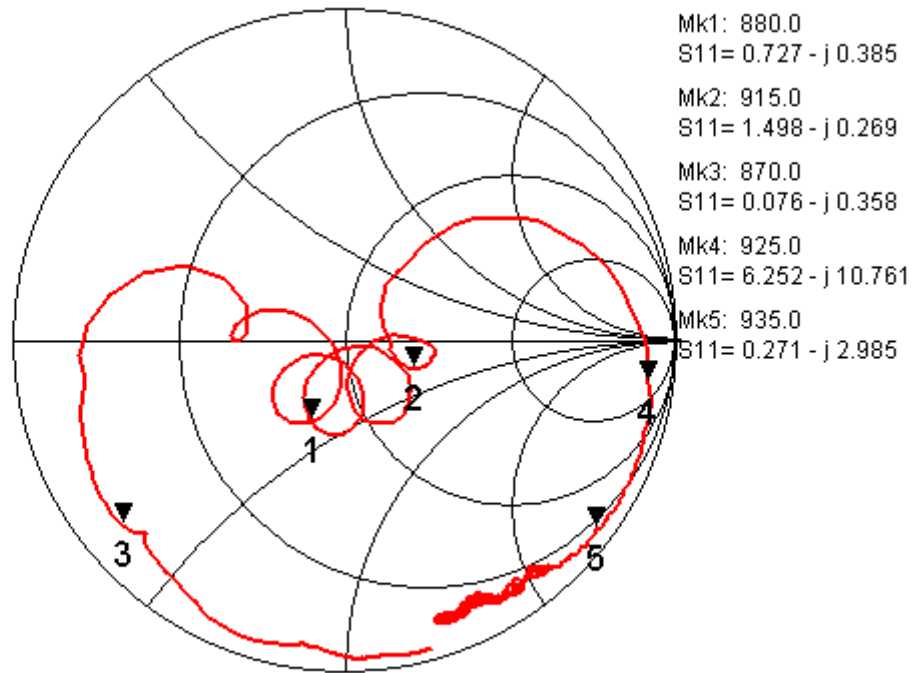


Fig.5 Input Impedance (Unbalance)

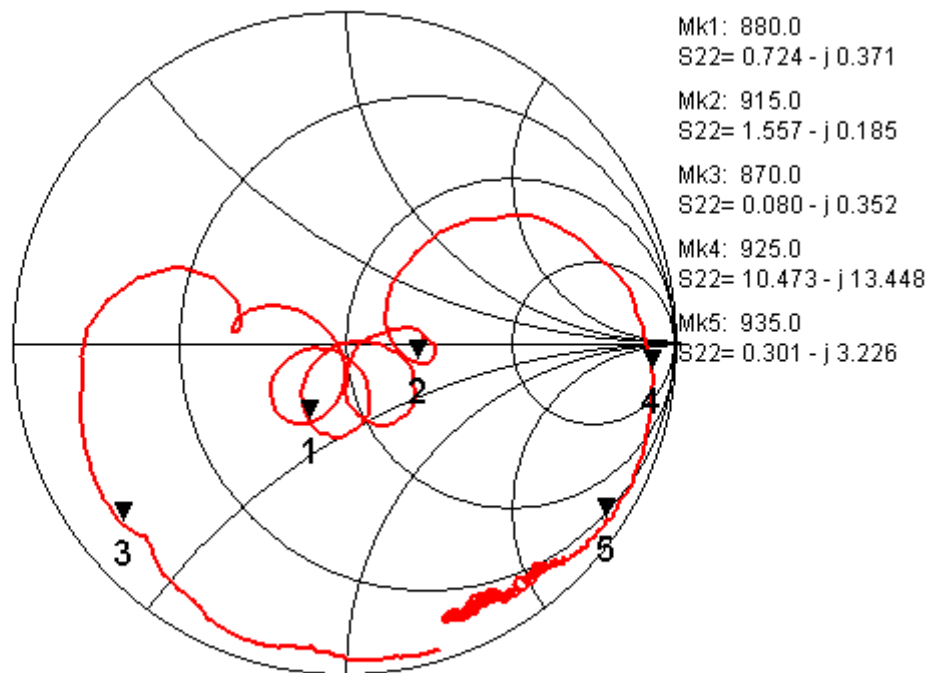


Fig.6 Output Impedance (Unbalance)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Taiyo Yuden](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [10017-3](#) [TP-103-PIN](#) [BD1222J50200AHF](#)