



MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM Rx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-942M50-D4DD	Version 1.0 d	

Table 1. Electrical specifications

Passband: 925 ~ 960 MHz						
Item	Condition	Specification				Remarks
		Min.	Typ.	Max.	Unit	
Insertion Loss	925 - 960 MHz	-	2.0	2.7	dB	
Ripple	925 - 960 MHz	-	0.8	1.4	dB	
Absolute Attenuation	DC - 880 MHz	40	60	-	dB	
	880 - 905 MHz	30	52	-	dB	
	905 - 915 MHz	18	34	-	dB	
	980 - 1025 MHz	24	30	-	dB	
	1025 - 2880 MHz	34	43	-	dB	
	2880 - 6000 MHz	10	18	-	dB	
VSWR(Input)	925 - 960 MHz	-	1.9	2.3		
VSWR(Output)	925 - 960 MHz	-	1.9	2.3		
Input Impedance		50			Ohm	
Output Impedance		50			Ohm	
Device Size	-	1.4typ.x1.0typ.x0.5max.			°C	
Operating temp.	-	-30 ~ +85			°C	




MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM Rx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-942M50-D4DD	Version 1.0 d	

Dimension


Device size: 1.4mmtyp. x 1.0mmtyp. x 0.5max.

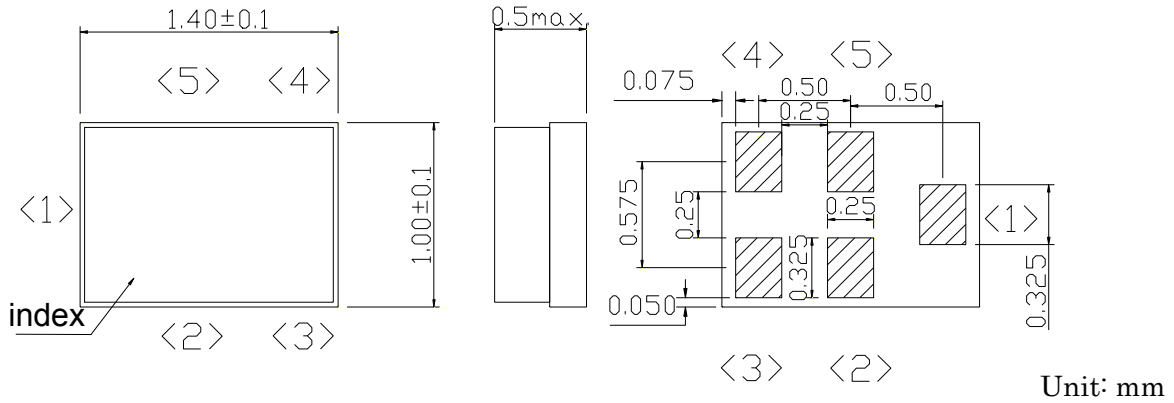

Pin Configuration

Pin No.	Symbol	Function
1	IN	Unbalanced pin
2	GND	Ground
3	GND	Ground
4	OUT	Unbalanced pin
5	GND	Ground

Evaluation Circuit

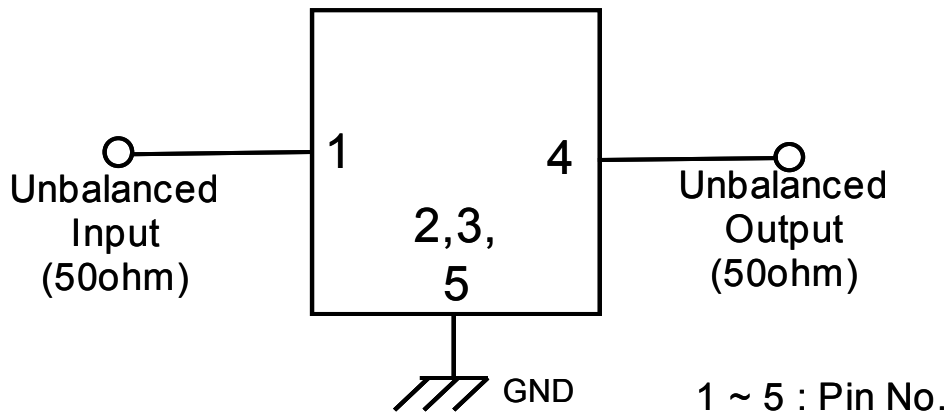



MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM Rx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-942M50-D4DD	Version 1.0 d	

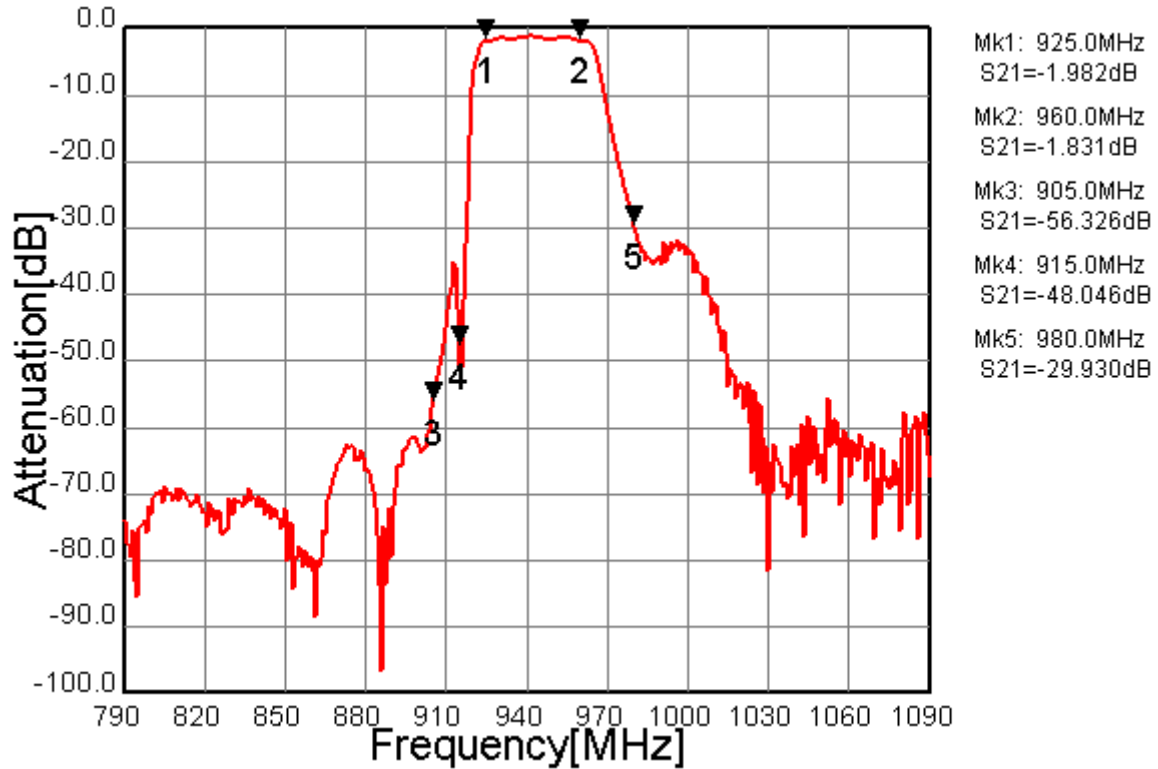


Fig.1 Pass-band Characteristics

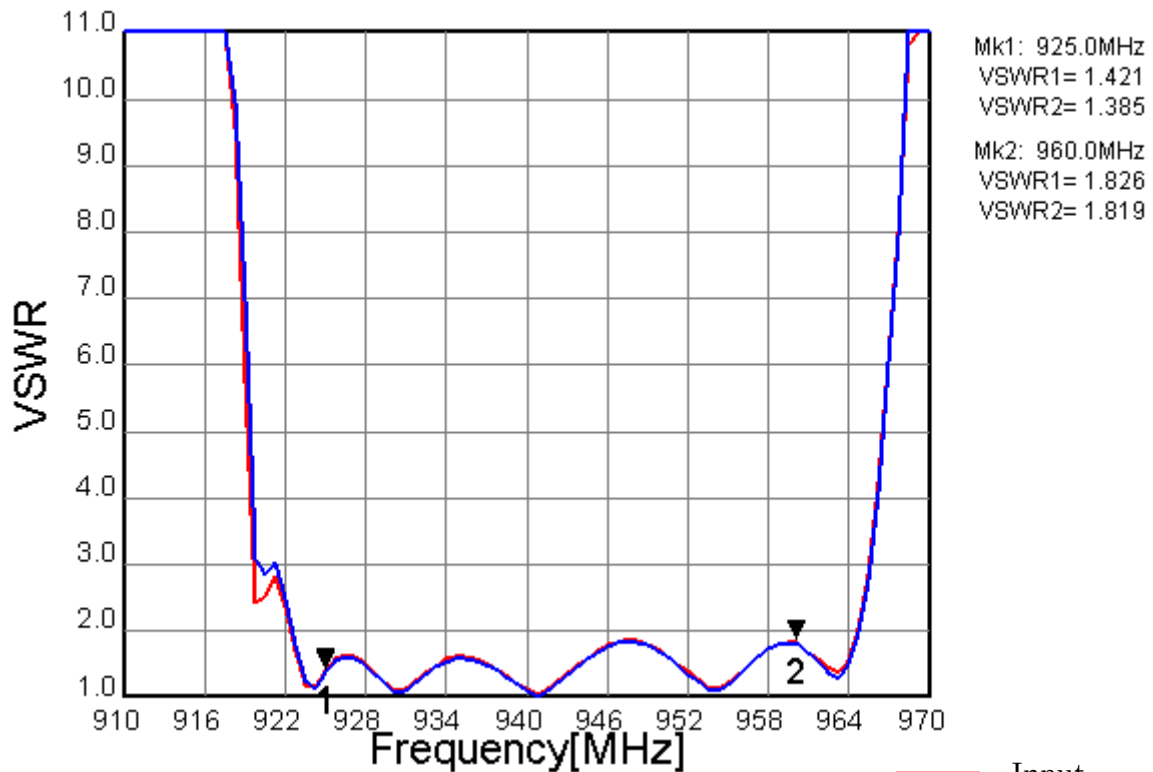


Fig.2 VSWR

— Input
— Output



MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM Rx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-942M50-D4DD	Version 1.0 d	

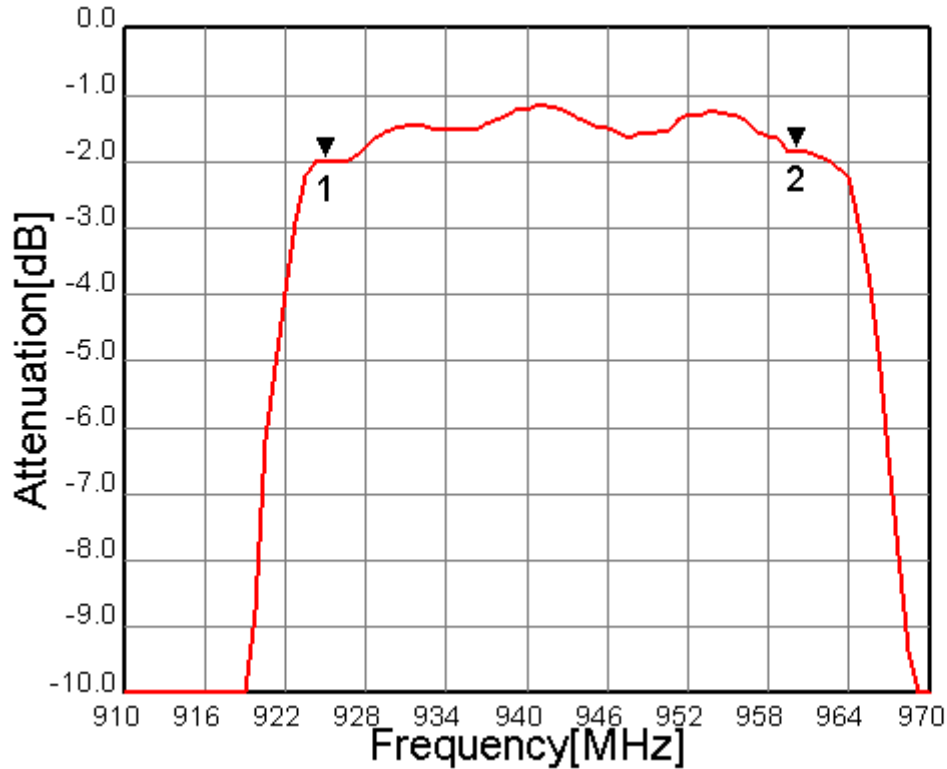


Fig.3 In-band Characteristics

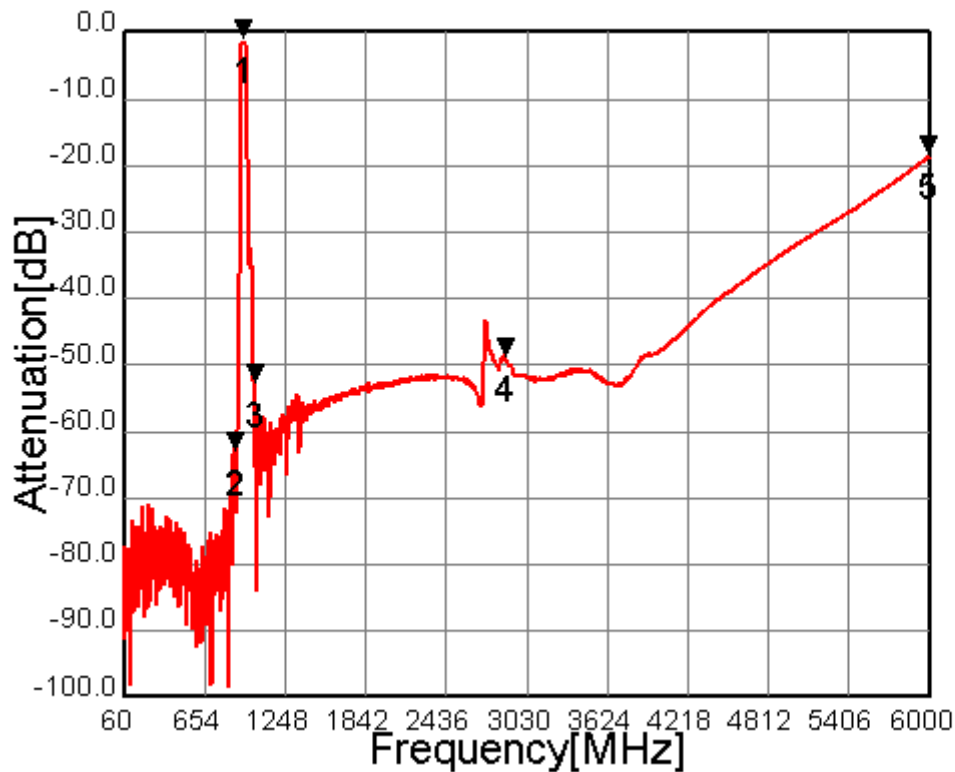


Fig.4 Wide-band Characteristics



MSL1

* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM Rx (50/50ohm Unbalance)	Date	March 31, 2010
Part Number	FAR-F5KA-942M50-D4DD	Version 1.0 d	

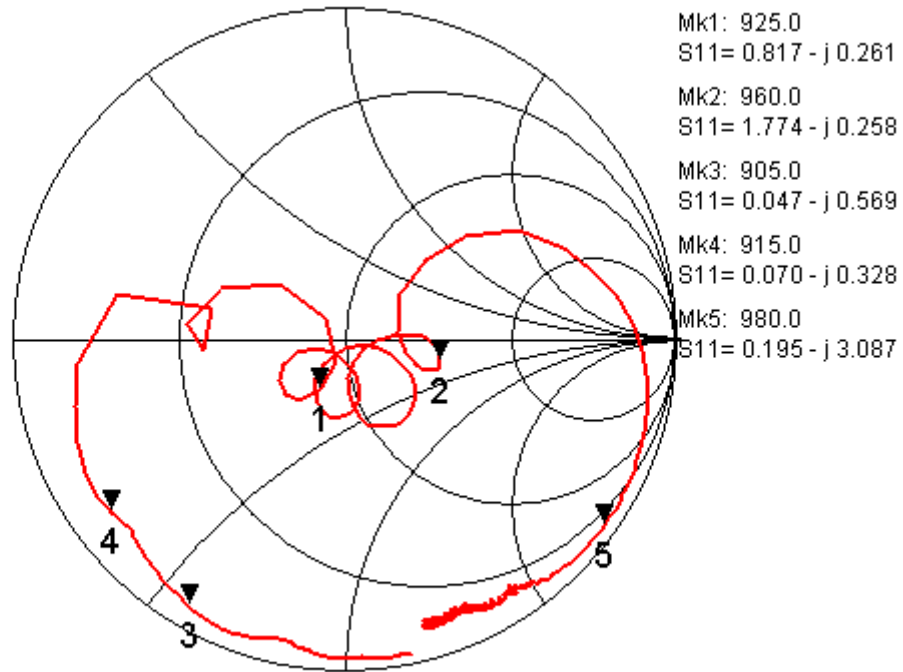


Fig.5 Input Impedance

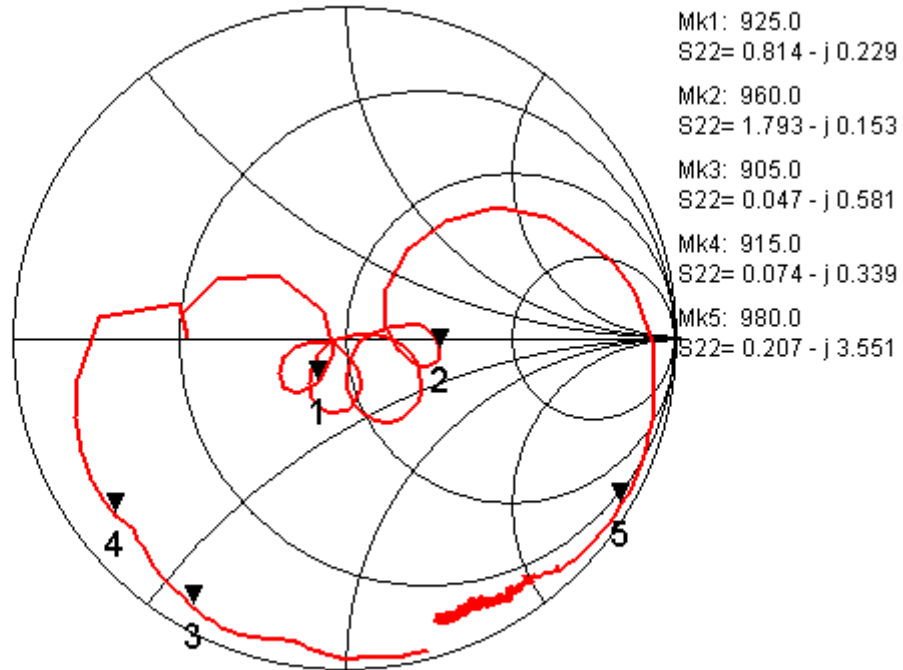


Fig.6 Output Impedance

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning category](#):

Click to view products by [Taiyo Yuden manufacturer](#):

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-103-PIN](#) [BD1222J50200AHF](#)