



MSL1

\* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM-Rx (50/150)	Date	March 31, 2010
Part Number	FAR-F5KB-942M50-B4EB	Version 4.0 d	

**Table 1 Electrical Specification**

Passband : 925 ~ 960 MHz						
Item	Condition (MHz)	Specification			Unit	Remark
		Min.	Typ.	Max.		
Insertion Loss	925 ~ 960	-	1.6	2.5	dB	
Ripple	925 ~ 960	-	0.4	1.6	dB	
Absolute attenuation	DC ~ 880	40	66	-	dB	
	880 ~ 905	30	38	-	dB	
	905 ~ 915	18	26	-	dB	
	980 ~ 1025	25	33	-	dB	
	1025 ~ 2880	36	50	-	dB	
	2880 ~ 6000	30	50	-	dB	
VSWR(Input)	925 ~ 960	-	1.7	2.0	-	
VSWR(Output)	925 ~ 960	-	1.6	2.0	-	
Amplitude Balance ( S <sub>21</sub> /S <sub>31</sub>  )	925 ~ 960	-1.0	0/ +0.5	+1.0	dB	
Phase Balance (∠S <sub>21</sub> -∠S <sub>31</sub> +180)	925 ~ 960	-10	0/+4	+10	deg	
Input Impedance	Unbalanced	50			ohm	
Output Impedance	Balanced	150//82nH			ohm	
Input Power	925 ~ 960	-	-	+13	dBm	
Operating temperature		-30 ~ +85			°C	
Device size		1.4typ. x 1.0typ. x 0.50typ.			mm	




MSL1

\* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM-Rx (50/150)	Date	March 31, 2010
Part Number	FAR-F5KB-942M50-B4EB	Version	4.0 d

### Dimension


Device size: 1.4typ. x 1.0typ. x 0.50typ.

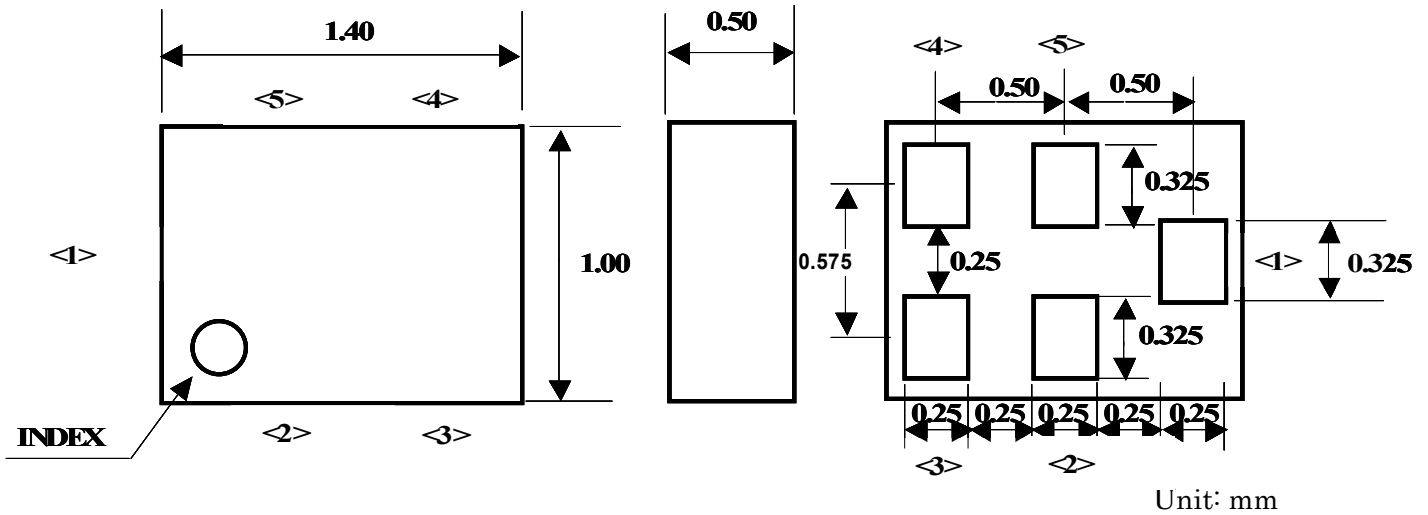

### Pin Configuration

Pin No.	Symbol	Function
1	IN	Unbalanced pin
2	GND	Ground
3	OUT	Balanced pin
4	OUT	Balanced pin
5	GND	Ground

### Evaluation Circuit

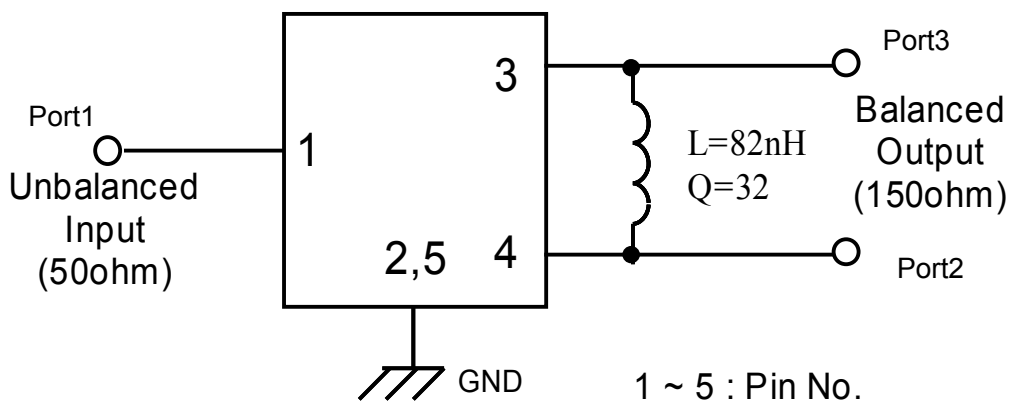



MSL1

\* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM-Rx (50/150)	Date	March 31, 2010
Part Number	FAR-F5KB-942M50-B4EB	Version 4.0 d	

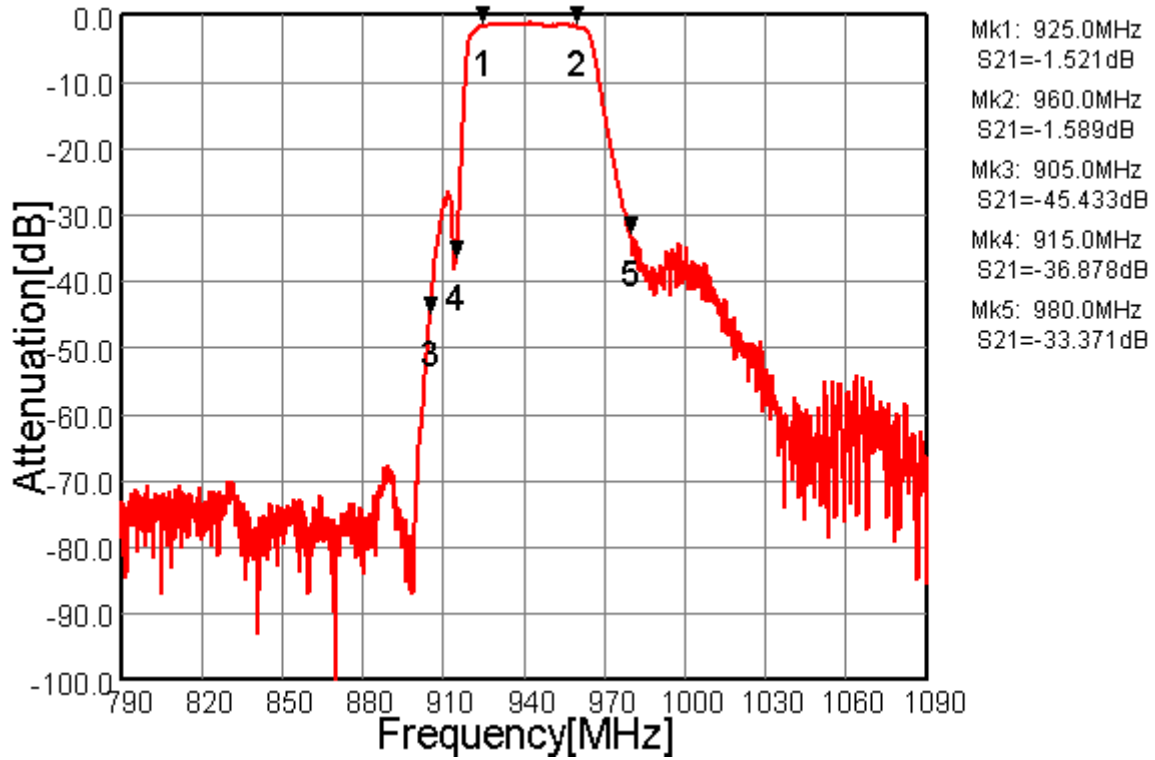


Fig.1 Pass-band Characteristics

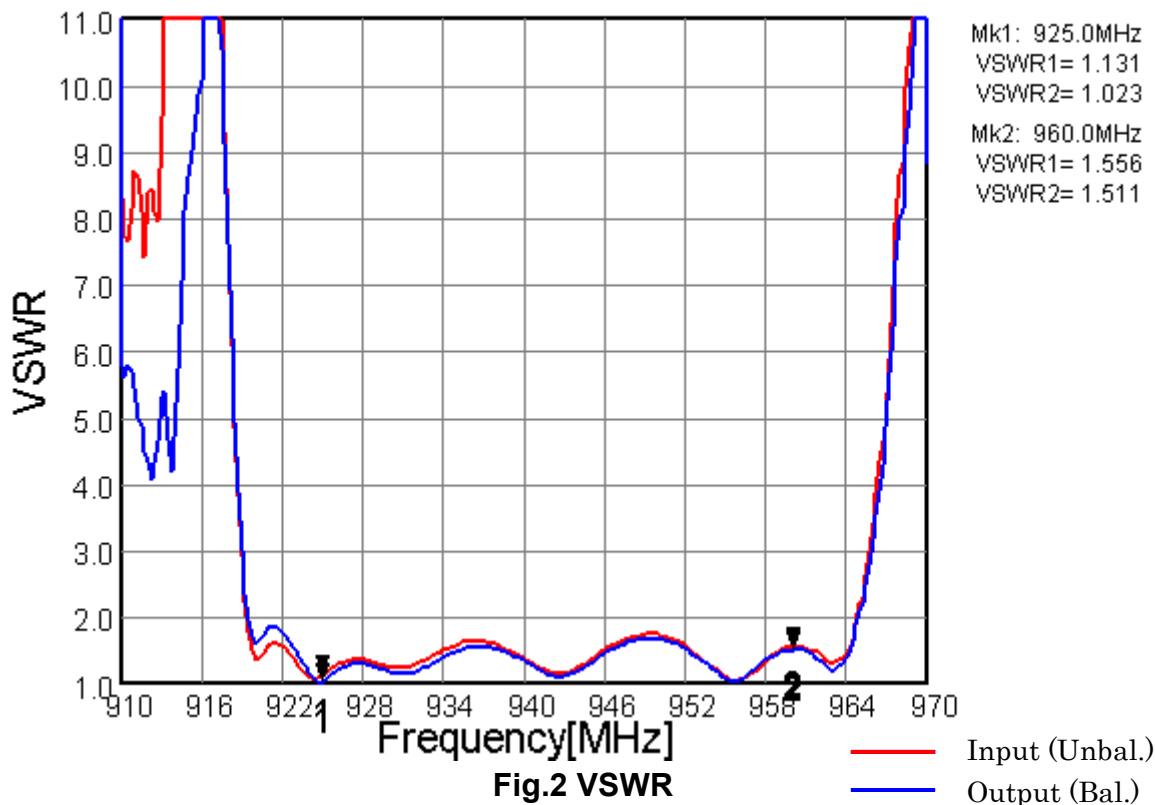


Fig.2 VSWR



MSL1

\* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM-Rx (50/150)	Date	March 31, 2010
Part Number	FAR-F5KB-942M50-B4EB	Version 4.0 d	

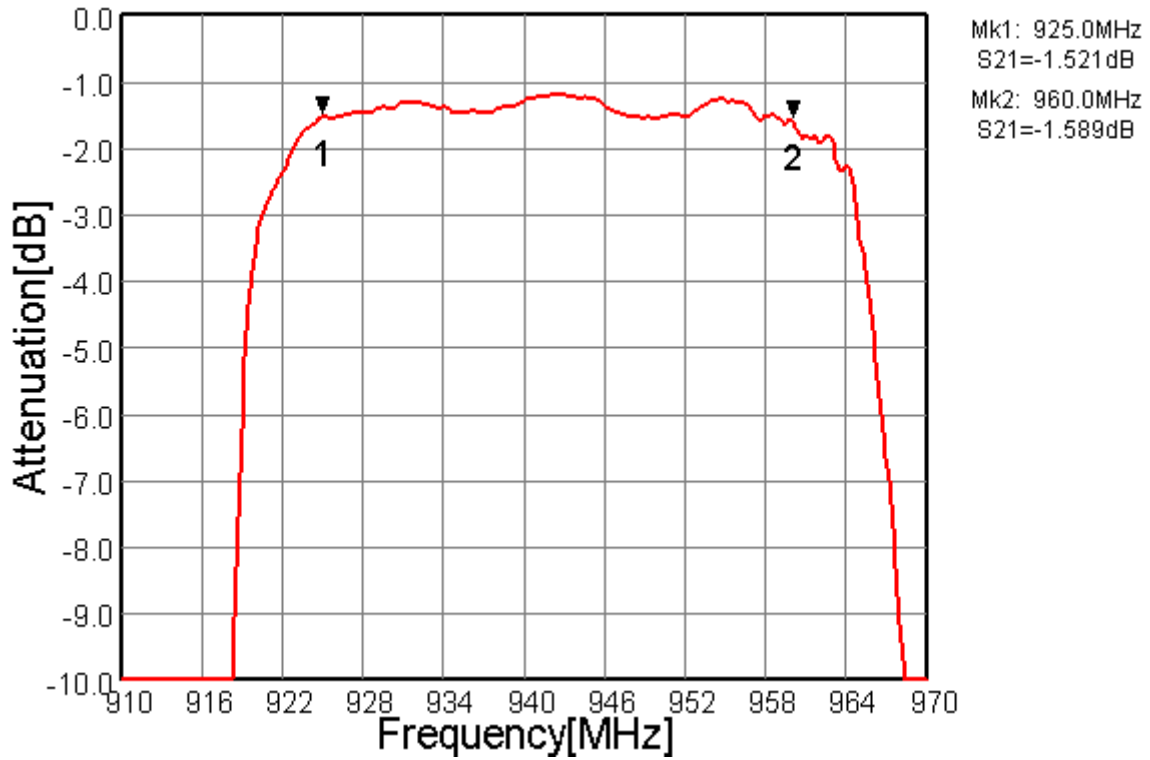


Fig.3 In-band Characteristics

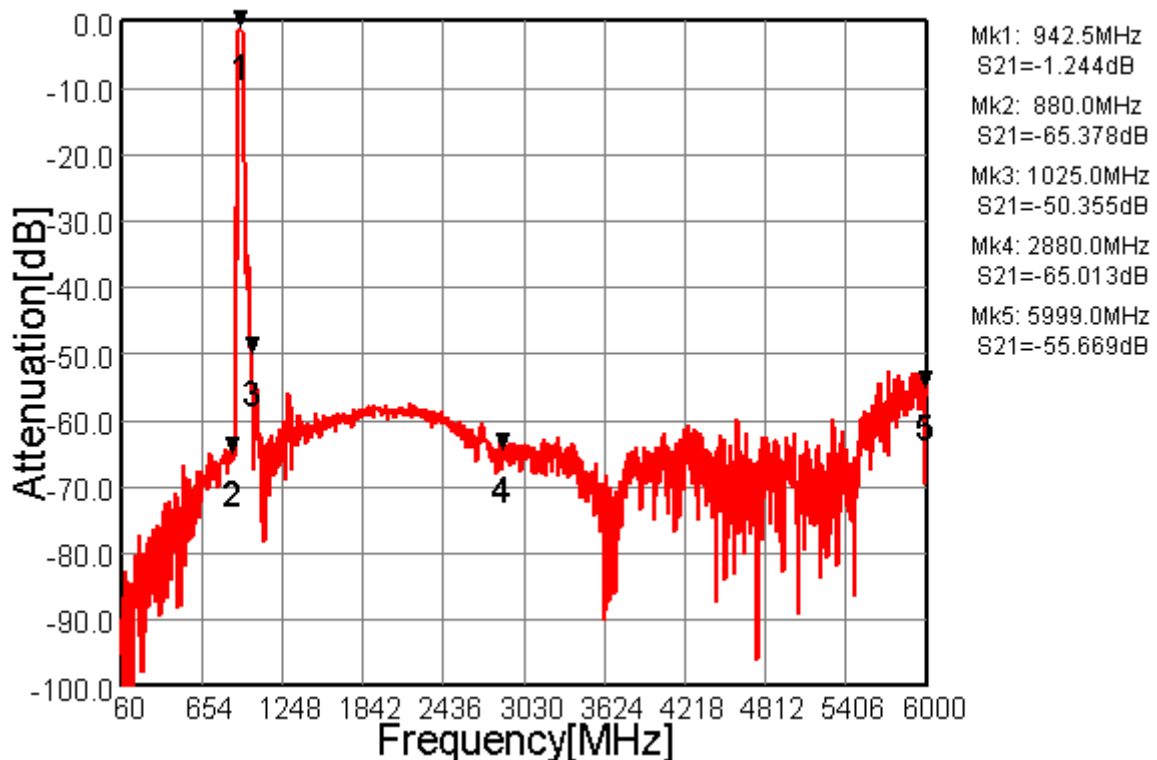


Fig.4 Wide-band Characteristics



MSL1

\* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM-Rx (50/150)	Date	March 31, 2010
Part Number	FAR-F5KB-942M50-B4EB	Version 4.0 d	

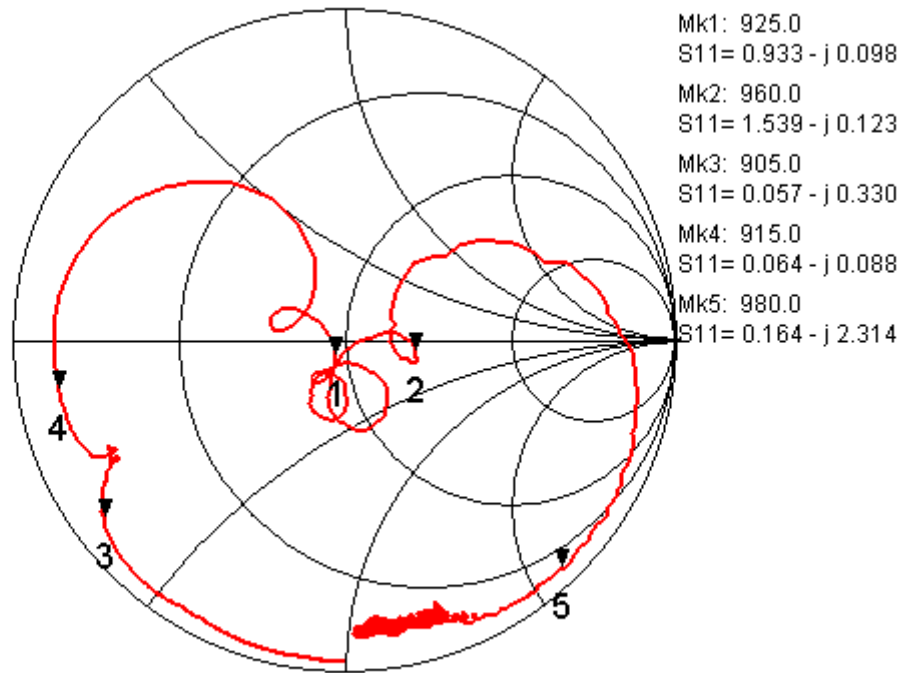


Fig.5 Input Impedance (Unbalance)

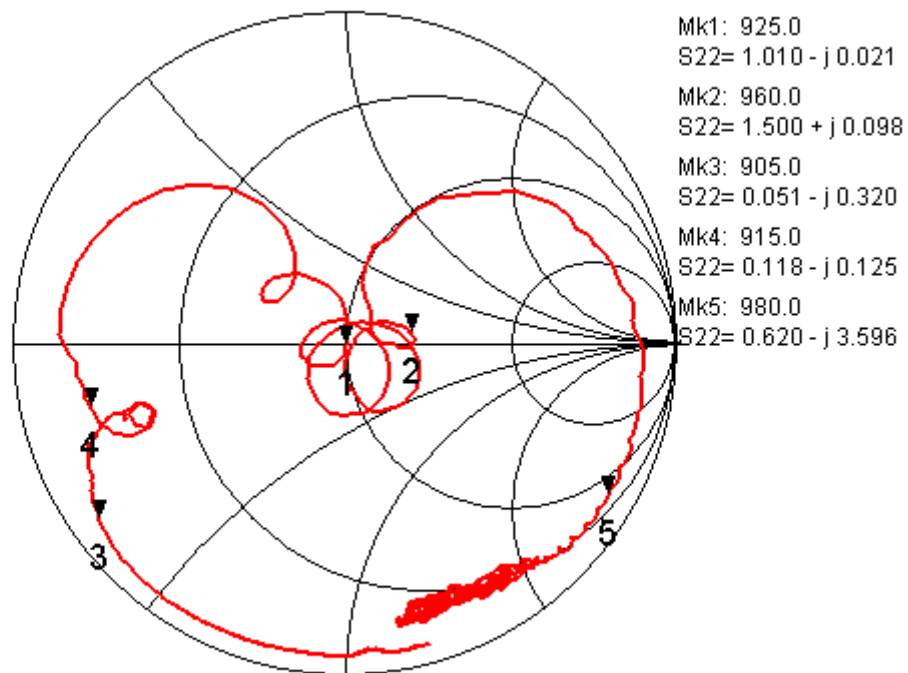


Fig.6 Output Impedance (Balance)



MSL1

\* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	EGSM-Rx (50/150)	Date	March 31, 2010
Part Number	FAR-F5KB-942M50-B4EB	Version 4.0 d	

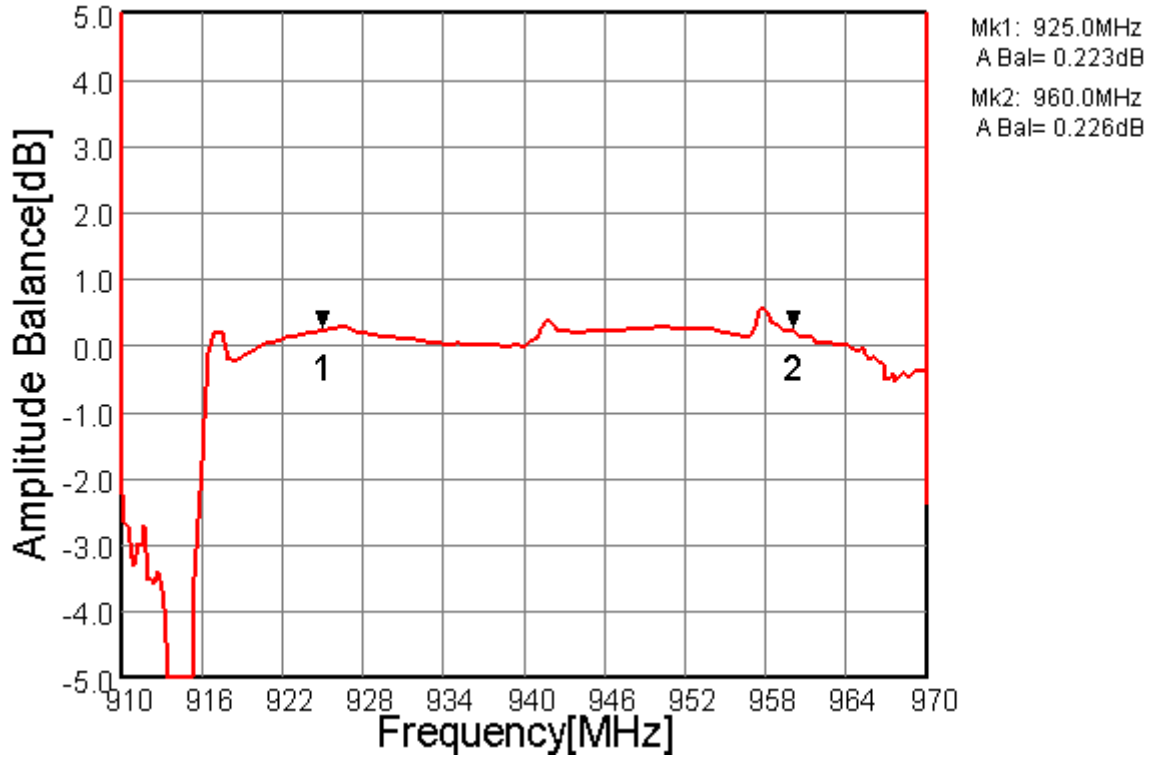


Fig.7 Amplitude Balance

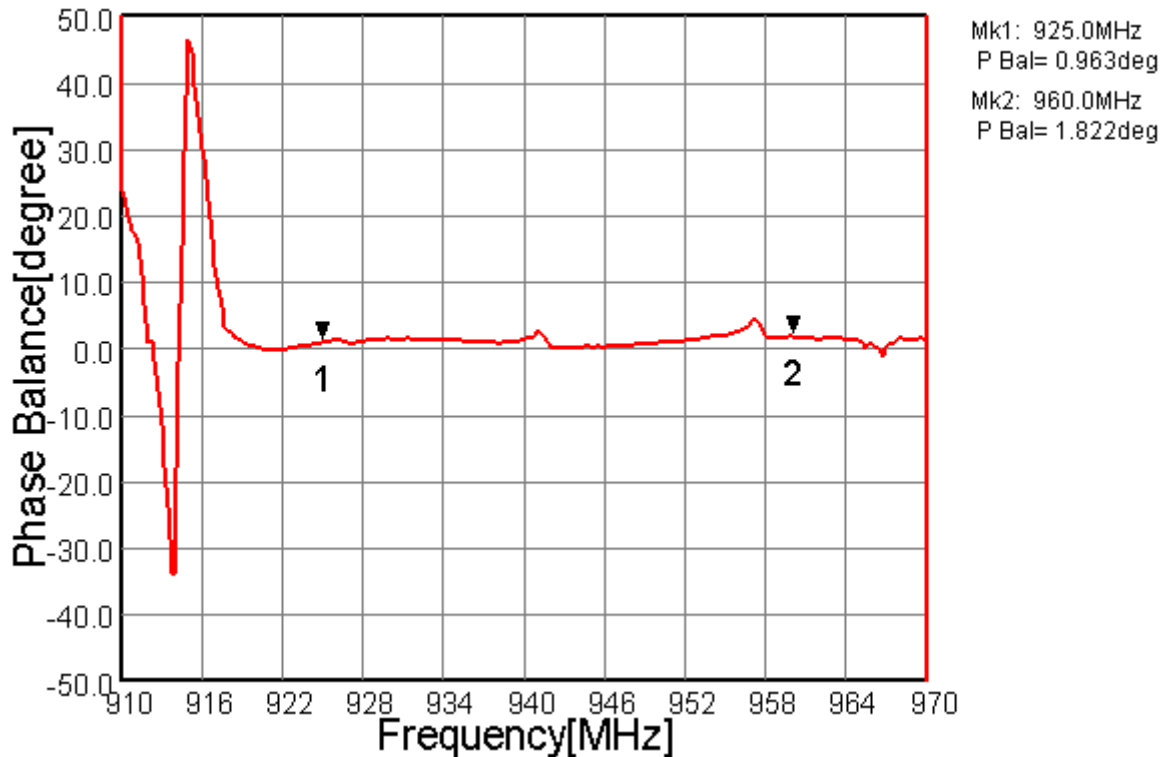


Fig.8 Phase Balance

TAIYO YUDEN

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [Taiyo Yuden](#) manufacturer:*

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-103-PIN](#) [BD1222J50200AHF](#)