



\* Pb Free Part



MSL1

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-CDMA I(2G) Rx	Date	March 31, 2010
Part Number	FAR-F6KB-2G1400-B4GC	Version 3.1d	

Table 1 Electrical Specification

Passband : 2110~ 2170 MHz						
Item	Condition (MHz)	Specification			Unit	Remark
		Min.	Typ.	Max.		
Insertion Loss	2110 ~ 2170	-	1.7	2.6	dB	
Ripple	2110 ~ 2170	-	0.3	1.4	dB	
Absolute attenuation	DC ~ 190	40	85	-	dB	
	1730 ~ 1790	30	46	-	dB	
	1920 ~ 1980	32	39	-	dB	
	2300 ~ 2360	20	28	-	dB	
	4030 ~ 4150	30	50	-	dB	
	5950~ 6130	20	45	-	dB	
	6140 ~ 6320	20	45	-	dB	
VSWR(input unbal)	2110 ~ 2170	-	1.7	2.7	-	
VSWR(output bal)	2110 ~ 2170	-	1.7	2.7	-	
Amplitude balance ( S <sub>21</sub> /S <sub>31</sub>  )	2110 ~ 2170	-2	-0.3/+0.9	+2	dB	
Phase balance ((∠S <sub>21</sub> -∠S <sub>31</sub> )+180)	2110 ~ 2170	-10	-3.5/+3.1	+10	deg.	
Input Impedance	Unbalanced	50			ohm	
Output Impedance	Balanced	100//10nH			ohm	
Operating temperature		-30~ +85			°C	
Device size		1.4typ. x 1.0typ. x 0.5max.			mm	




MSL1

\* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-CDMA I(2G) Rx	Date	March 31, 2010
Part Number	FAR-F6KB-2G1400-B4GC	Version 3.1d	

### Dimensions

Device size: 1.4mmtyp. x 1.0mmtyp. x 0.5mmmax.

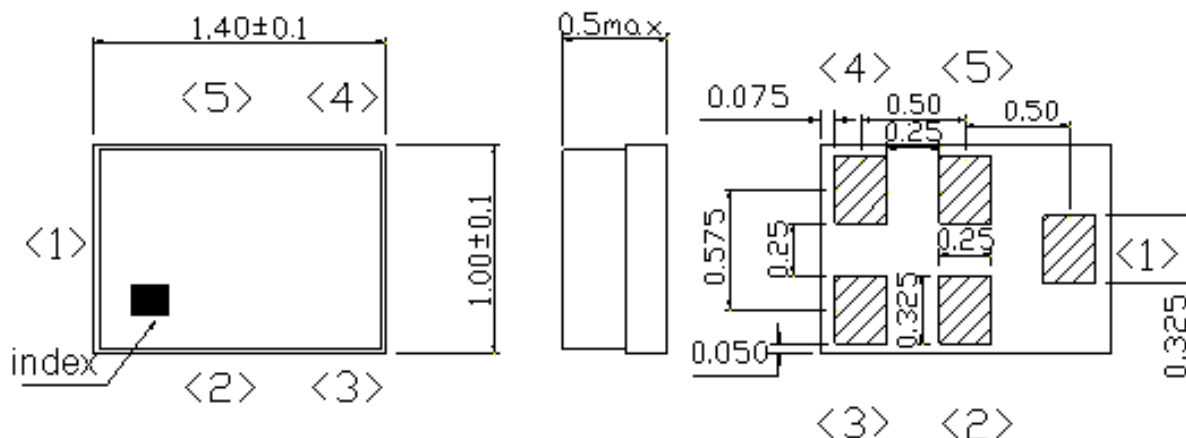


Unit : mm

### Pin Configuration

Pin No.	Pin name	Description
1	IN	Unbalanced pin
2	GND	Ground
3	OUT	Balanced pin
4	OUT	Balanced pin
5	GND	Ground

### Evaluation Circuit

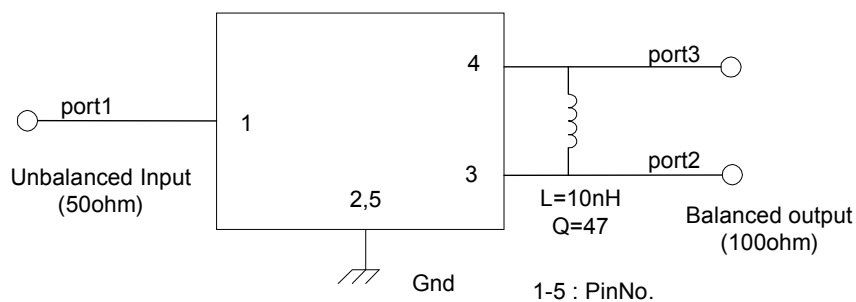




\* Pb Free Part




MSL1

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-CDMA I(2G) Rx	Date	March 31, 2010
Part Number	FAR-F6KB-2G1400-B4GC	Version 3.1d	

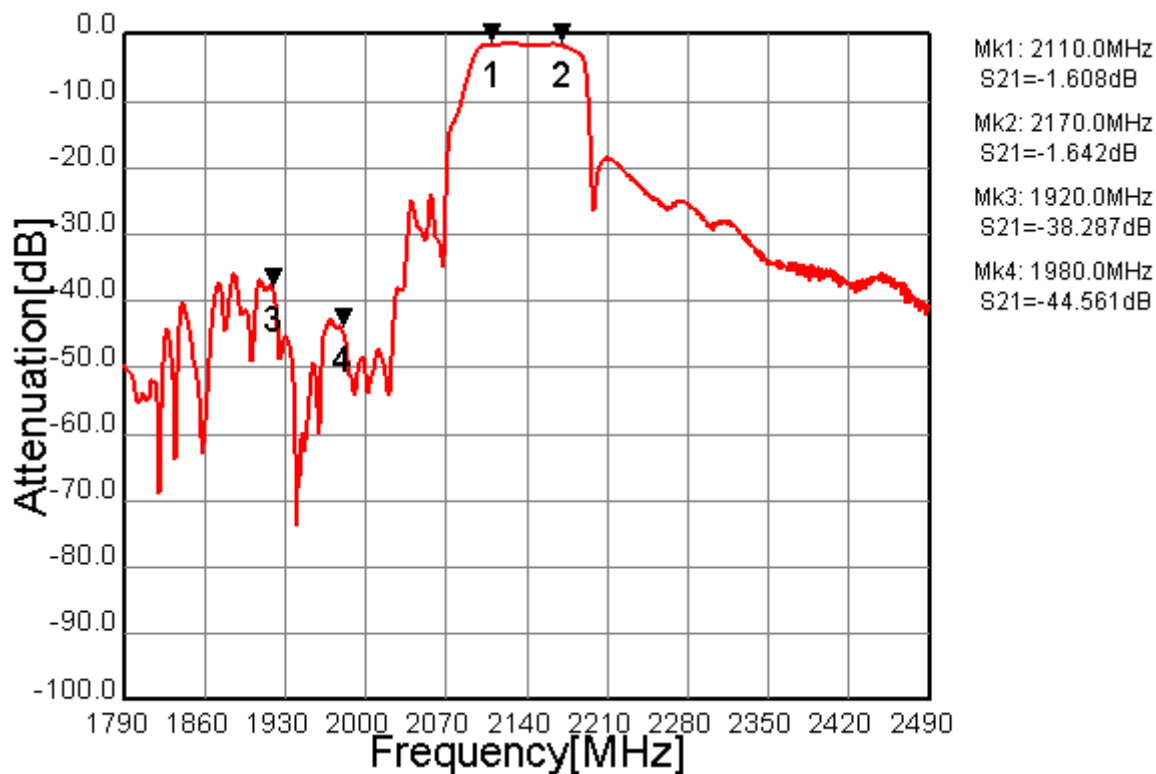

**Fig.1 Pass-band Characteristics**

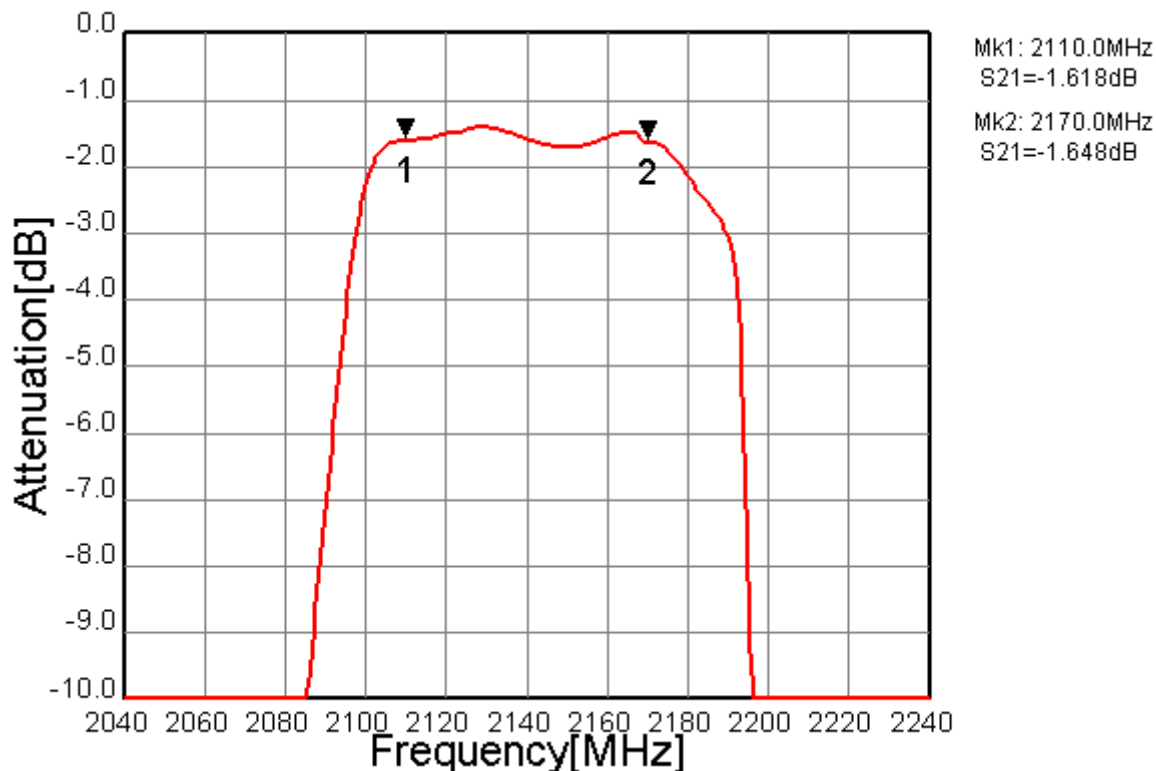

**Fig.2 In-band Characteristics**




\* Pb Free Part




MSL1

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-CDMA I(2G) Rx	Date	March 31, 2010
Part Number	FAR-F6KB-2G1400-B4GC	Version 3.1d	

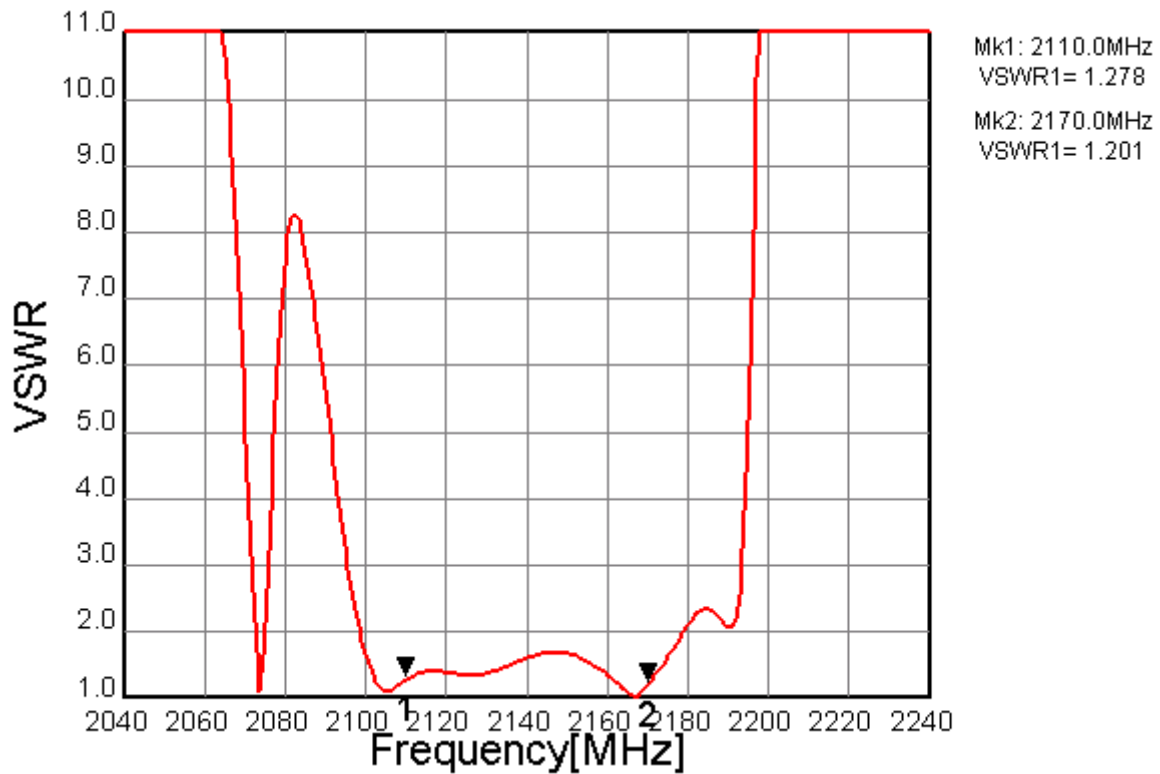

**Fig.3 VSWR (unbal)**

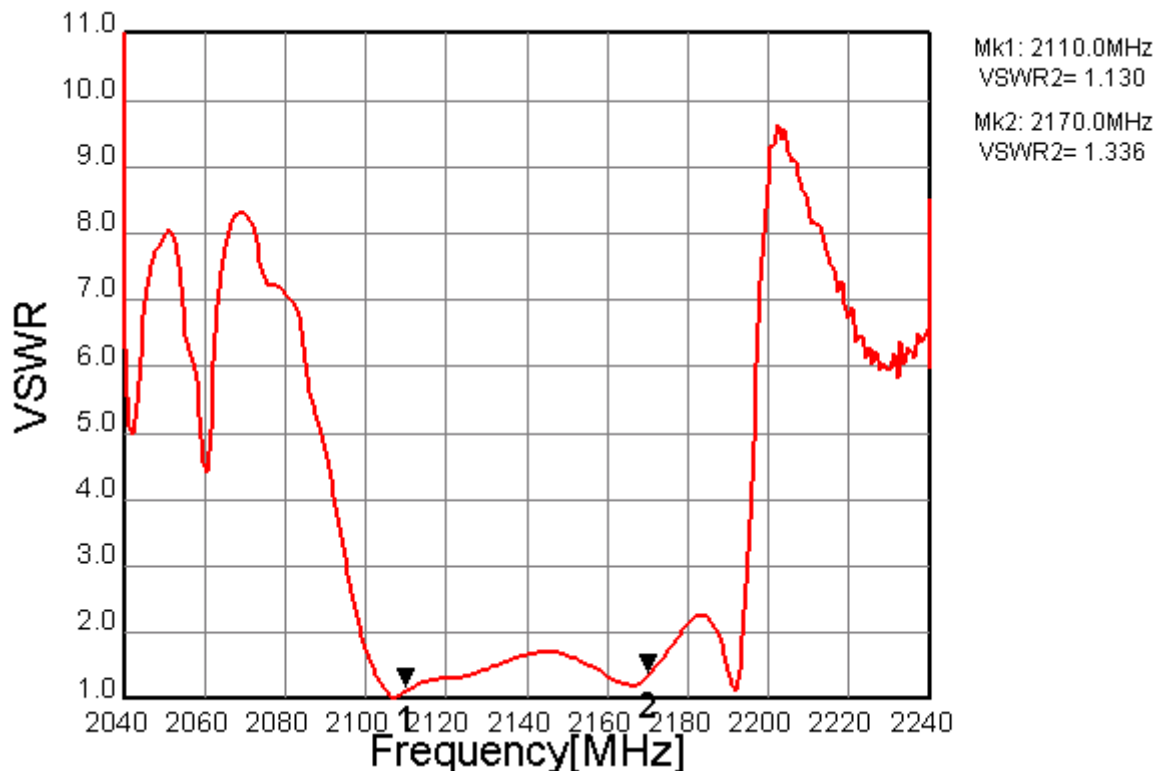

**Fig.4 VSWR(bal)**




\* Pb Free Part



MSL1

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-CDMA I(2G) Rx	Date	March 31, 2010
Part Number	FAR-F6KB-2G1400-B4GC	Version 3.1d	

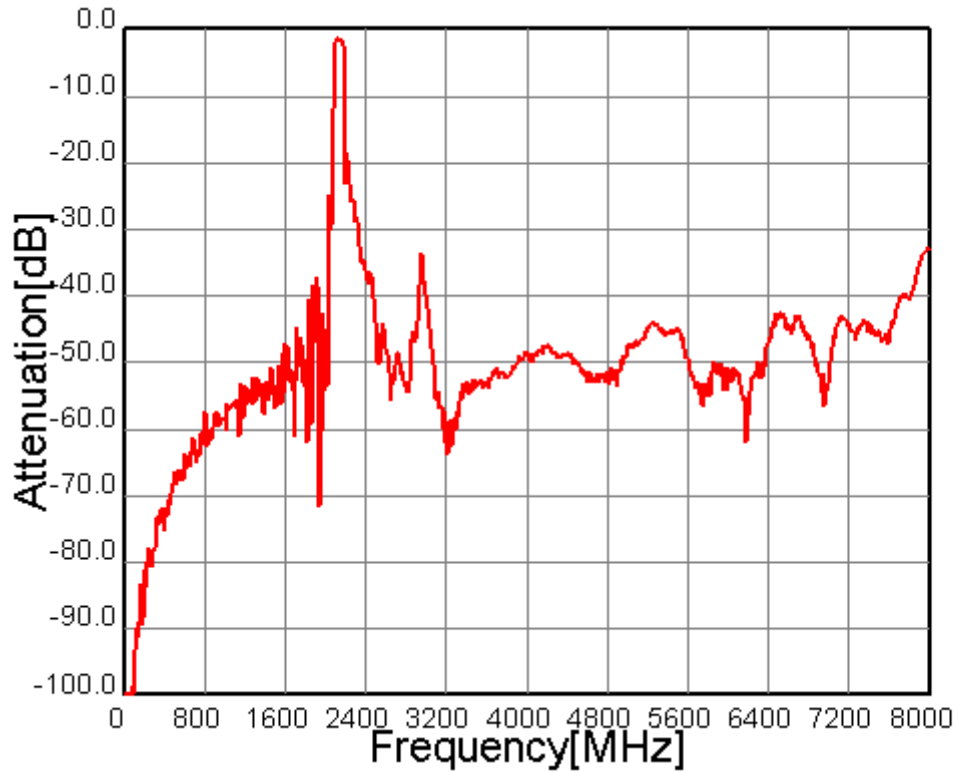

**Fig.5 Wide-band Characteristics**




\* Pb Free Part



MSL1


Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-CDMA I(2G) Rx	Date	March 31, 2010
Part Number	FAR-F6KB-2G1400-B4GC	Version 3.1d	

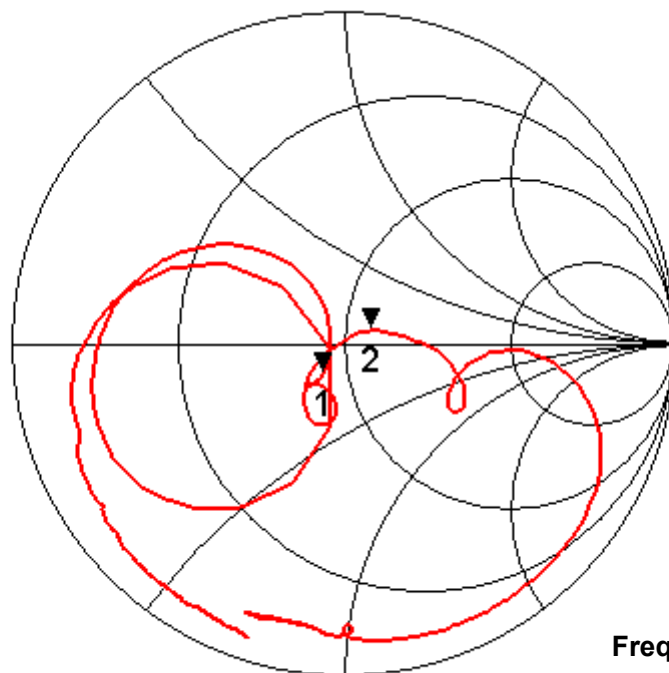

Mk1: 2110.0  
 $S_{11} = 0.854 - j 0.160$   
 Mk2: 2170.0  
 $S_{11} = 1.167 + j 0.107$

Frequency 1790-2490MHz

**Fig.6 Impedance (unbal)**

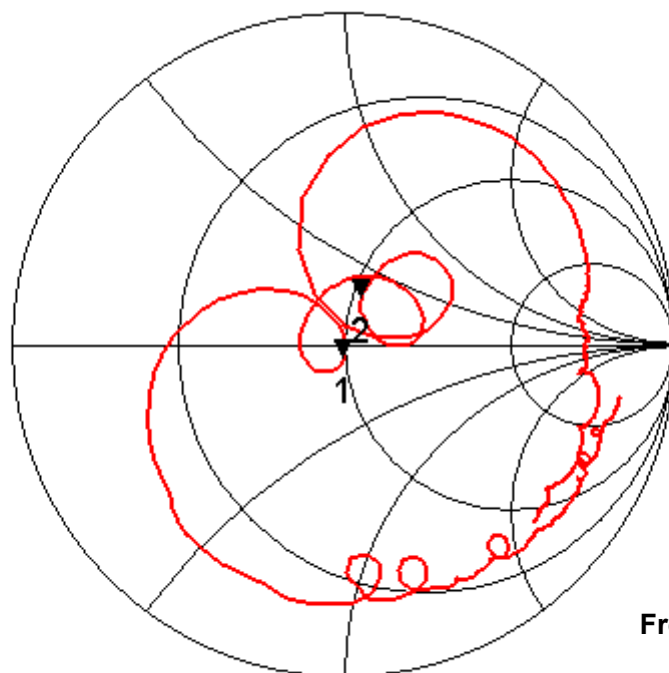

Mk1: 2110.0  
 $S_{22} = 0.976 - j 0.105$   
 Mk2: 2170.0  
 $S_{22} = 1.072 + j 0.292$

Frequency 1790-2490MHz

**Fig.7 Impedance (bal)**




\* Pb Free Part




MSL1

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-CDMA I(2G) Rx	Date	March 31, 2010
Part Number	FAR-F6KB-2G1400-B4GC	Version 3.1d	

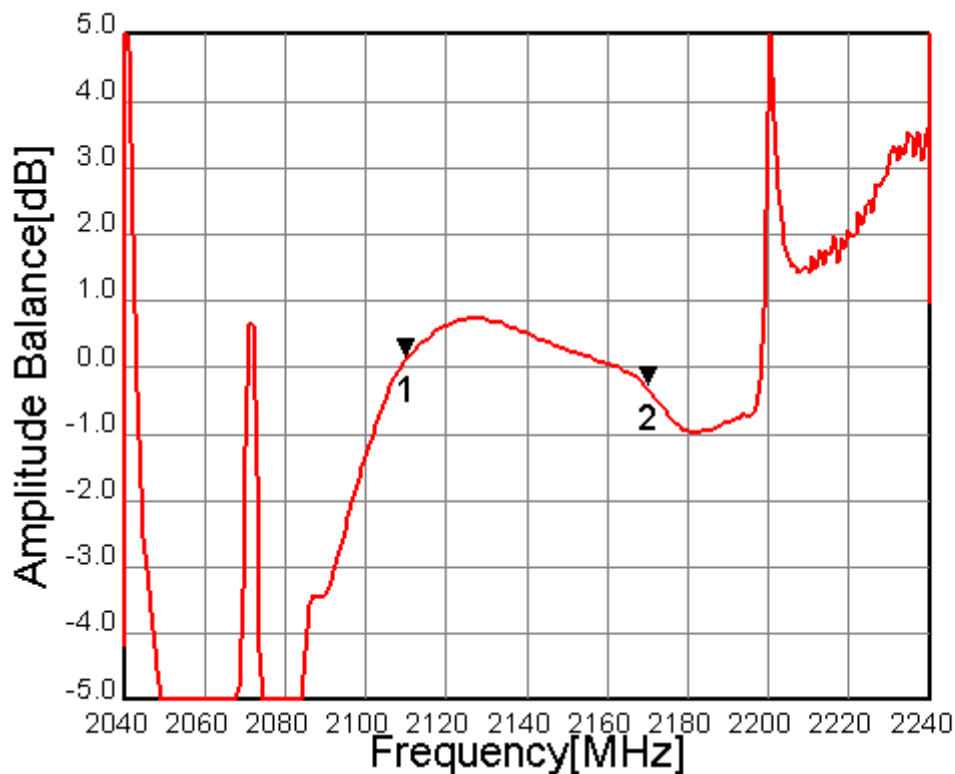

**Fig.8 Amplitude Balance**

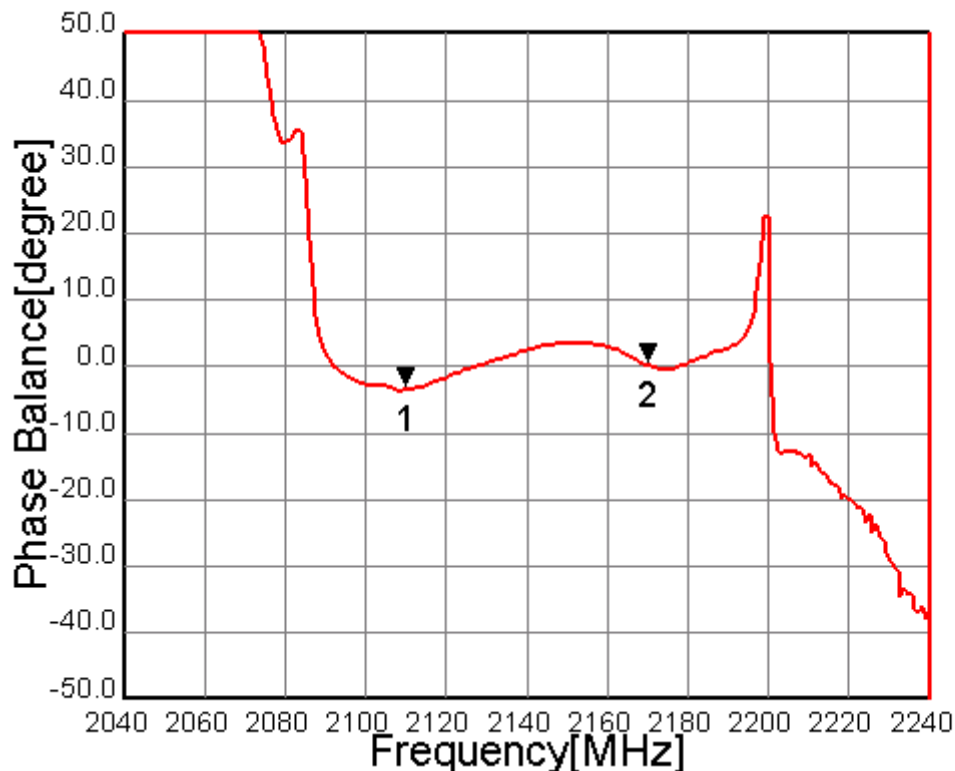

**Fig.9 Phase Balance**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [Taiyo Yuden](#) manufacturer:*

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [10017-3](#) [TP-103-PIN](#) [BD1222J50200AHF](#)