

## CMJ Series • SMD Miniature Common Mode Chokes

### Features

- Miniature, low cost SMD for pick and place compatibility while providing consistent and reliable coplanarity
- High attenuation over a wide frequency range
- Manufactured in ISO-9001 approved Talema facility
- Other inductance values available

### Electrical Specifications

Ratings at 25°C ambient

Operating Temperature: 0 to 70°C

Storage Temperature: -25° to +105°C



Test voltage between windings: 500Vrms

Test Frequency: Inductance measured @ 100kHz/20mVrms

## CMJ Series • Micro-Miniature Common Mode Chokes for Data and Signal Line EMI Suppression

Part Number	OCL (μH) +50/-30%	I <sub>N</sub> (mA)	L <sub>L</sub> (μH)	DCR (mOhms)	Number of Data Lines	Schematic
<b>Double Chokes</b>						
CMJ-2-110	11	500	0.05	70	2	2
CMJ-2-240	24	500	0.10	100	2	2
CMJ-2-470	47	500	0.20	130	2	2
CMJ-2-101	100	500	0.25	260	2	2
CMJ-2-471	470	500	0.20	190	2	2
CMJ-2-102	1000	500	0.25	250	2	2
CMJ-2-222	2200	400	0.35	450	2	2
CMJ-2-472	4700	200	0.50	840	2	2
CMJ-2-103	10000	200	0.40	800	2	2
CMJ-2-203	20000	140	0.40	1800	2	2
<b>Tri Chokes</b>						
CMJ-3-680	68	400	0.25	110	3	3
<b>Quad Chokes</b>						
CMJ-4-470	47	500	0.25	180	4	4
CMJ-4-101	100	500	0.30	330	4	4
CMJ-4-471	470	500	0.25	200	4	4
CMJ-4-102	1000	500	0.35	310	4	4
CMJ-4-222	2200	400	0.50	570	4	4
CMJ-4-472	4700	200	0.70	860	4	4
CMJ-4-103	10000	110	0.50	1700	4	4
CMJ-4-123	12000	100	0.50	1800	4	4


### Dimensions

Dimensions: Inches (Millimeters)


Tolerance: ±0.010 (0.25)

Surface Coplanarity will be 0.004(0.10) maximum


#### CMJ-2

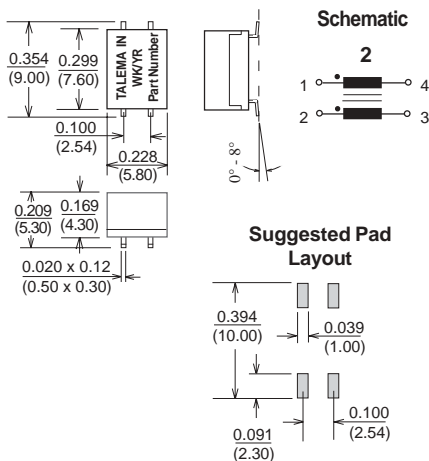

#### CMJ-3

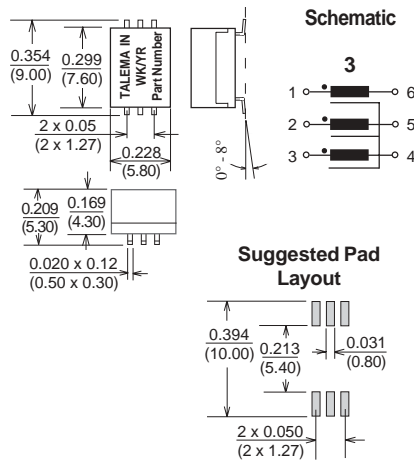

#### CMJ-4

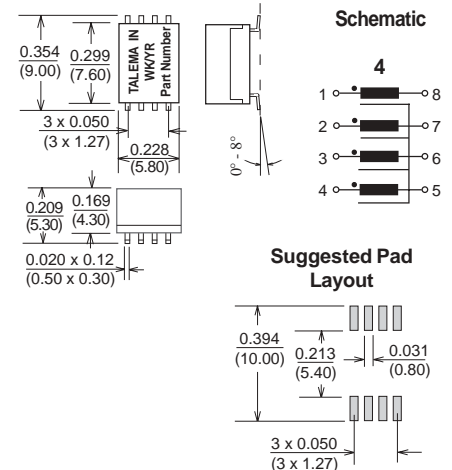

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Talema](#) manufacturer:*

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)  
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)  
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)  
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)  
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)