

SPECIFICATION

Part No. : AA.161.301111

Product Name : Magnet Mounted GPS-GLONASS-GALILEO

Antenna

Feature : 1575MHz - 1610MHz

1.8-5.5V

3m RG174 SMA(M)

IP67 Rated

Custom cables and connectors available

RoHS Compliant





1. Introduction


This antenna is designed for applications which require high positioning accuracy by combining signals from GPS, GALILEO and GLONASS systems. High gain wide-band patch antenna on a large integral ground delivers maximum performance.

2. Specification

ELECTRICAL							
Centre Frequency	1574~1610MHz						
Antenna Gain	26 ± 3 dBic @ zenith @ 1575.42 MHz 27 ± 3 dBic @ zenith @ 1602 MHz						
Axial Ratio	3.0dB max. @ zenith @ center frequency						
Polarization		RHCP					
VSWR	2.0 max.						
Impedance	50Ω						
DC input	1.8V (min.)	3.0V (typ.)	5.5V (max.)				
LNA Gain	22dB	28dB	31dB				
Noise Figure	2.6dB	2.6dB	2.6dB				
Power Consumption	5mA	10mA	23mA				
MECHANICAL							
Antenna Dimensions							
Housing Material	ABS						
Cable	3m RG174 (fully customizable)						
Connector	SMA(M) (fully customizable)						
	ENVIRONMENTAL						
Operation Temperature		-40°C to 85°C					
Storage Temperature	-40°C to 105°C						
Relative Humidity	40% to 95%						




3. Antenna Block Diagram

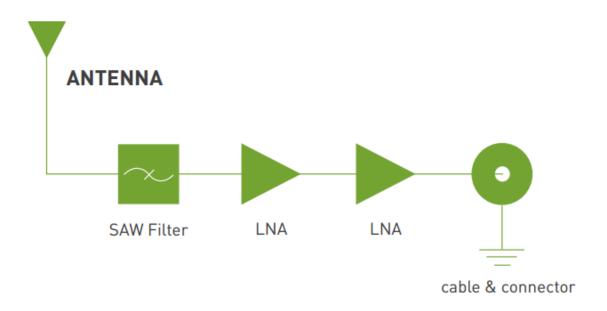




4. Antenna S11 Property

4.1 Return Loss

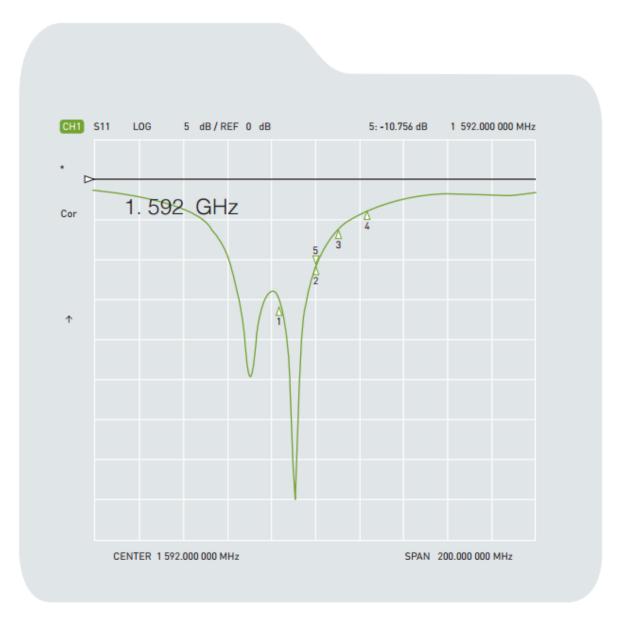




4.2 Impedance

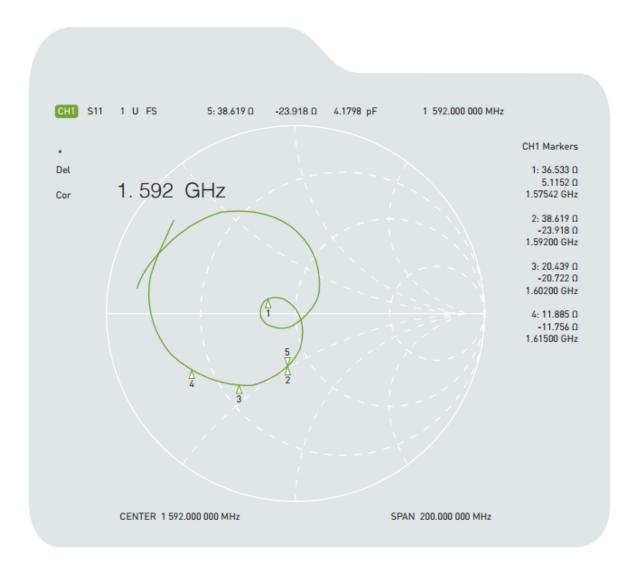


Test Frequency	Return Loss (dB)	Impedance (Ω)	VSWR
1575MHz	-15.8	35.6 + j5.1	1.4
1602MHz	- 6.2	20.4 – j20.7	2.9





5. Radiation Patterns

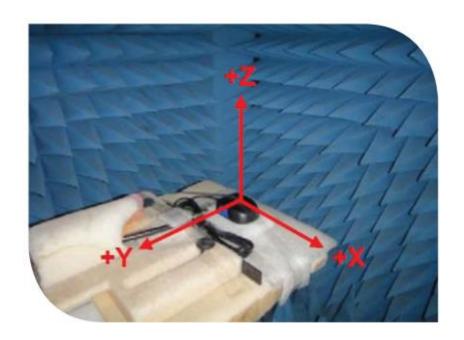




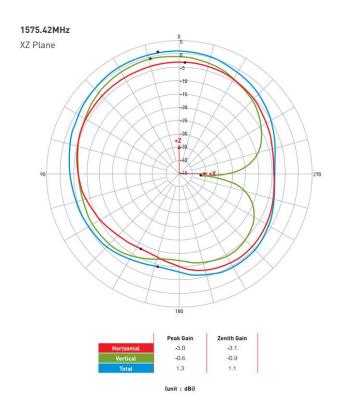

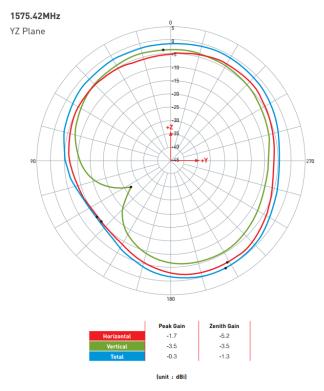


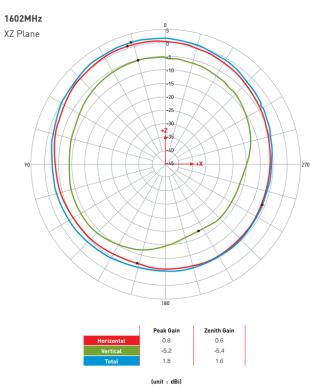

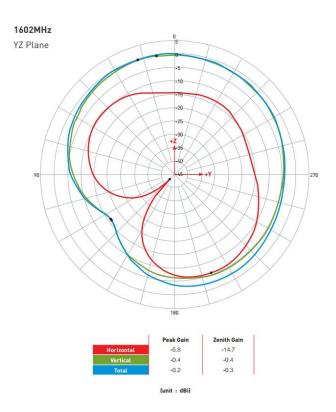




6. LNA Gain and Out Band Rejection @3.0V

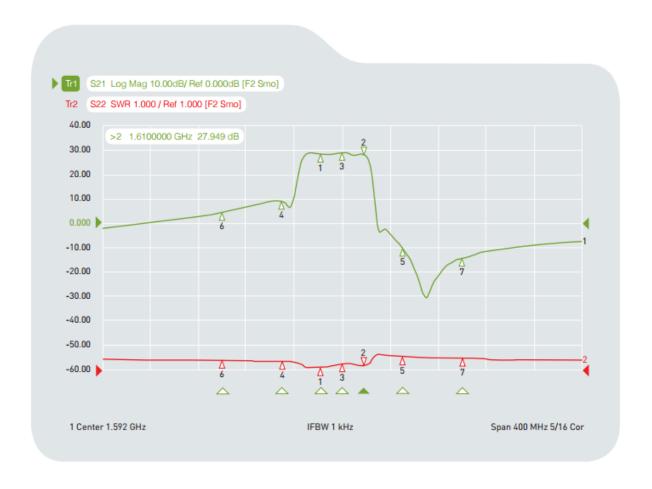

Ch1 Tr1 S21	1	1.5740000 GHz	28.186	dB
Ch1 Tr1 S21	>2	1.6100000 GHz	27.949	dB
Ch1 Tr1 S21	3	1.5920000 GHz	29.044	dB
Ch1 Tr1 S21	4	1.5420000 GHz	9.0245	dB
Ch1 Tr1 S21	5	1.6420000 GHz	-10.035	dB
Ch1 Tr1 S21	6	1.4920000 GHz	4.4105	dB
Ch1 Tr1 S21	7	1.6920000 GHz	-14.431	dB





7. LNA Noise Figure @3.0V

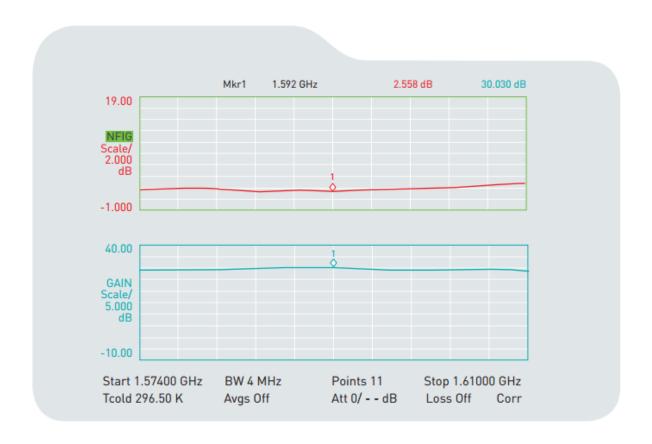




8. Axial Ratio

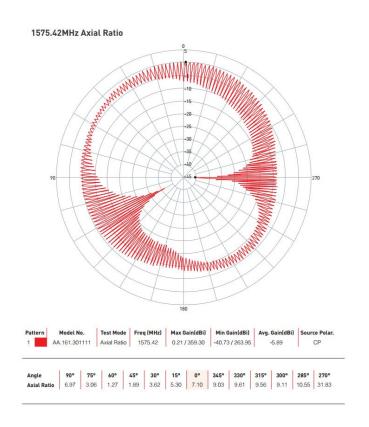

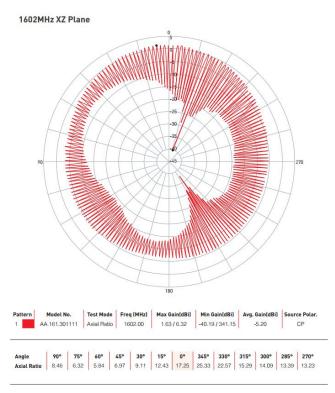




9. Drawing

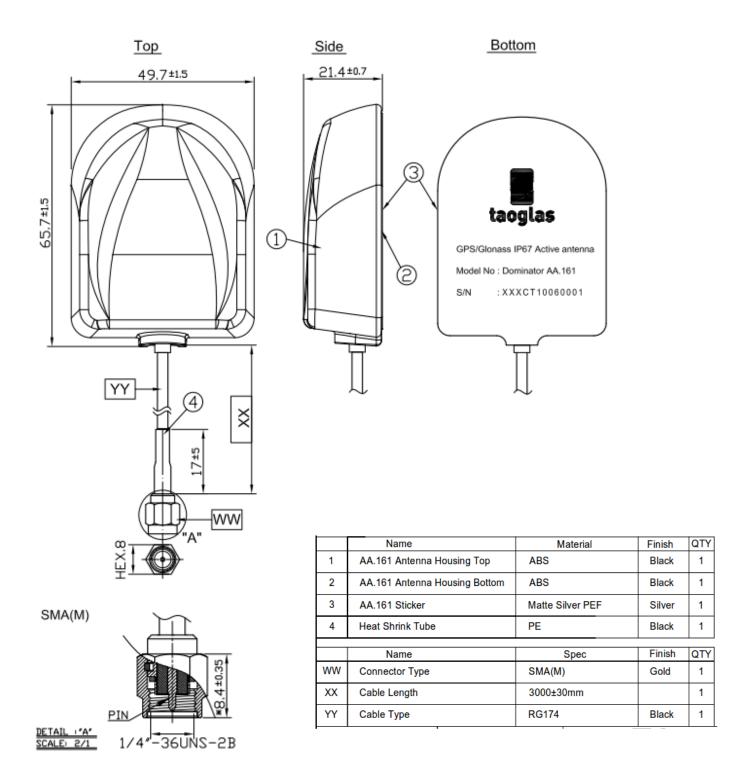



10. Packaging

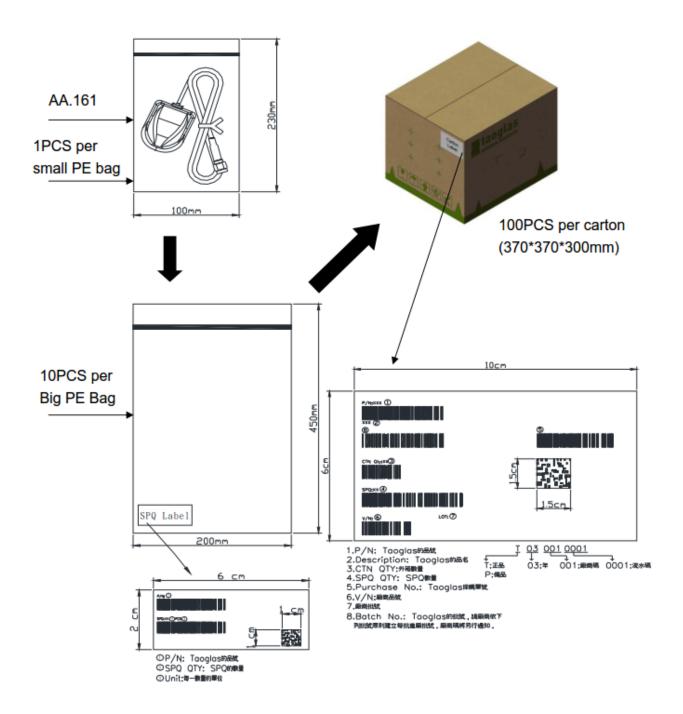

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Taoglas manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352