



TAOGLAS®



Datasheet

2-in-1 Ultima

Part No:
MA111.C.LB.001

Description:

MA111 Ultima Series – 2-in-1 Super Low-Profile Combination
GPS/GLONASS/BeiDou/Galileo and Cellular Permanent Mount Antenna

Features:

Height: 19.6mm (0.77")
Diameter: 55mm (2.17")
Heavy duty Permanent Mount
UV and vandal resistant ABS housing and thread
IP67 Rated Waterproof
Cable: 3m RG-174 GNSS, 3m CFD-200 Cellular
Connector: SMA(M)ST
RoHS & Reach Compliant

1. Introduction	3
2. Specifications	4
3. Antenna Characteristics	8
4. Active Antenna Characteristics	13
5. Radiation Patterns	17
6. Mechanical Drawing	39
7. Installation	40
8. Packaging	41
9. Application Note	42
<hr/>	
Changelog	45

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The MA111 Ultima Series 2-in-1 GPS/GLONASS/BeiDou/Galileo & Cellular Combination Antenna is an extremely low-profile combination high performance GPS/GLONASS/BeiDou/Galileo and cellular antenna solution for professional telematics applications. At only 22 mm height it is one of the lowest profile antennas in the market, with a diameter of 55 mm. It is designed to be mounted and couple to the metal structures it attaches to radiate. Durable UV ABS housing, thread and nut is resistant to vandalism and direct attack.

Typical Applications Include:

- Asset Tracking
- Digital Signage
- Smart Metering

The IP67 waterproof robust plastic body makes it extremely light, economical for shipping and minimum weight impact on vehicles. This also makes it ideal for use in humid environments such as water pits or marine applications as there are no external metal parts to corrode. The closed cell foam with double-sided adhesive provides a permanent waterproof seal and can adjust to different curvatures, stopping water from leaking under the antenna into the mounting hole.

For applications that require mounting on non-metal structures we recommend the Hercules MA105. The cables and connectors are fully customizable, contact your regional Taoglas Customer support teams for more information.

2. Specifications

GNSS Frequency Bands Covered							
GPS/QZSS	L1	L2	L5	L6			
	1575.42MHz	1227.6MHz	1176.45MHz	1278.75MHz			
	■	□	□	□			
GLONASS	L5R	L3PT	L2PT	L1CR	L1PT		
	1176.45MHz	1201.5MHz	1246MHz	1575.42MHz	1602MHz		
	□	□	□	■	■		
Galileo	E5a	E5b	E4	E3	E6	E2	L1
	1176.45MHz	1201.5MHz	1215MHz	1256MHz	1278.75MHz	1561MHz	1575.42MHz
	□	□	□	□	□	■	■
BeiDou	B1	B2	B3				
	1561MHz	1207.14MHz	1268.52MHz				
	■	□	□				
Compass	E5B(B2)/ E6(B3)	E2(B1)					
	1268.56MHz	1561MHz					
	□	■					
SBAS	Omnistar	WAAS/EGN OS					
	1542.5MHz	1575.42MHz					
	□	■					

GNSS Electrical			
Frequency (MHz)	1561	1575.42	1602
Efficiency (%)			
Free space	48.3	56.2	42.6
30x30cm Ground plane	44.7	55.7	61.5
Average Gain (dB)			
Free space	-3.16	-2.50	-3.71
30x30cm Ground plane	-3.49	-2.54	-2.11
Peak Gain (dBi)			
Free space	1.08	1.88	1.05
30x30cm Ground plane	1.32	2.56	4.13
Polarization	RHCP		
Impedance	50Ω		
Return Loss	<-10dB		

LNA and Filter Electrical Properties			
Frequency (MHz)	1561	1575.42	1602
Gain@1.8V (Typ.)	22.23dB	21.65dB	18.85dB
Gain@3.0V (Typ.)	30.11dB	32.39dB	28.37dB
Gain@5.5V (Typ.)	34.87dB	39.07dB	33.09dB
Noise@1.8V (Typ.)	1.83dB	1.85dB	1.99dB
Noise@3.0V (Typ.)	1.5dB	1.49dB	1.5dB
Noise@5.5V (Typ.)	1.66dB	1.61dB	1.62dB
Current@1.8V(mA)	4.88mA		
Current@3.0V(mA)	10.84mA		
Current@5.5V(mA)	22.83mA		

Cellular Antenna											
Frequency (MHz)	5G NR Band 71		LTE700	GSM 850/900	5G NR Band	DCS	PCS	UMTS1	LTE2600	5G NR Band 77, 78, 79	LTE5200/Wi-Fi 5800
	617 ~698	698 ~806	824 ~960	1427 ~1518	1710 ~1880	1850 ~1990	1920 ~2170	2490 ~2690	3300 ~3500	5150 ~5925	
Efficiency (%)											
Free Space	3m	9.6	10.9	21.2	13.0	49.9	47.9	40.7	14.8	28.6	26.9
30x30cm Ground Plane	3m	2.0	29.3	51.0	10.1	36.6	37.4	29.2	11.7	25.5	20.4
Average Gain (dB)											
Free Space	3m	-10.18	-9.63	-6.73	-8.87	-3.02	-3.20	-3.90	-8.29	-5.44	-5.70
30x30cm Ground Plane	3m	-16.91	-5.33	-2.92	-9.95	-4.36	-4.27	-5.35	-9.34	-5.94	-6.91
Peak Gain (dBi)											
Free Space	3m	-5.83	-5.41	-1.66	-3.70	2.20	2.40	1.56	-3.06	1.10	-0.44
30x30cm Ground Plane	3m	-10.81	-0.09	2.93	-1.42	2.73	4.01	3.33	-2.18	0.60	0.11
Impedance	50Ω										
Polarization	Linear										
Radiation Pattern	Omni-Directional										

Mechanical	
Dimensions	Diameter: 55mm, Height: 30mm
Cable type	Cellular: CFD-200 GPS/GLONASS/BeiDou/Galileo: RG-174
Cable length	3000mm
Casing	ABS
Connector	SMA Male
Thread Diameter	M24
Weight	0.21Kg
Environmental	
Temperature Range	-40°C to 85°C
Waterproof	IP67
Thermal Shock	100 cycles -40°C to +80°C
Shock (drop test)	1m drop on concrete 6 axes
Humidity	Non-condensing 65°C 95% RH


5G/4G Bands			
Band Number	5G NR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA		
	Uplink	Downlink	Covered
1	UL: 1920 to 1980	DL: 2110 to 2170	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓
5	UL: 824 to 849	DL: 869 to 894	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✗
8	UL: 880 to 915	DL: 925 to 960	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✗
12	UL: 699 to 716	DL: 729 to 746	✓
13	UL: 777 to 787	DL: 746 to 756	✓
14	UL: 788 to 798	DL: 758 to 768	✓
17	UL: 704 to 716	DL: 734 to 746	✓
18	UL: 815 to 830	DL: 860 to 875	✓
19	UL: 830 to 845	DL: 875 to 890	✓
20	UL: 832 to 862	DL: 791 to 821	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✗
22	UL: 3410 to 3490	DL: 3510 to 3590	✗
23	UL: 2000 to 2020	DL: 2180 to 2200	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓
26	UL: 814 to 849	DL: 859 to 894	✓
27	UL: 807 to 824	DL: 852 to 869	✓
28	UL: 703 to 748	DL: 758 to 803	✓
29	UL: -	DL: 717 to 728	✓
30	UL: 2305 to 2315	DL: 2350 to 2360	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5	✗
32	UL: -	DL: 1452 - 1496	✗
35		1850 to 1910	✓
38		2570 to 2620	✓
39		1880 to 1920	✓
40		2300 to 2400	✓
41		2496 to 2690	✓
42		3400 to 3600	✓
43		3600 to 3800	✓
48		3550 to 3700	✓
66	UL: 1710-1780	DL: 2110-2200	✓
71		617 to 698	✗
74/75/76		1427 to 1518	✗
78		3300 to 3800	✓
79		4400 to 5000	✓

*Tested on 30*30cm Ground Plane


**Covered bands represent greater than 20% Efficiency

3. Antenna Characteristics


3.1 Return Loss – GNSS

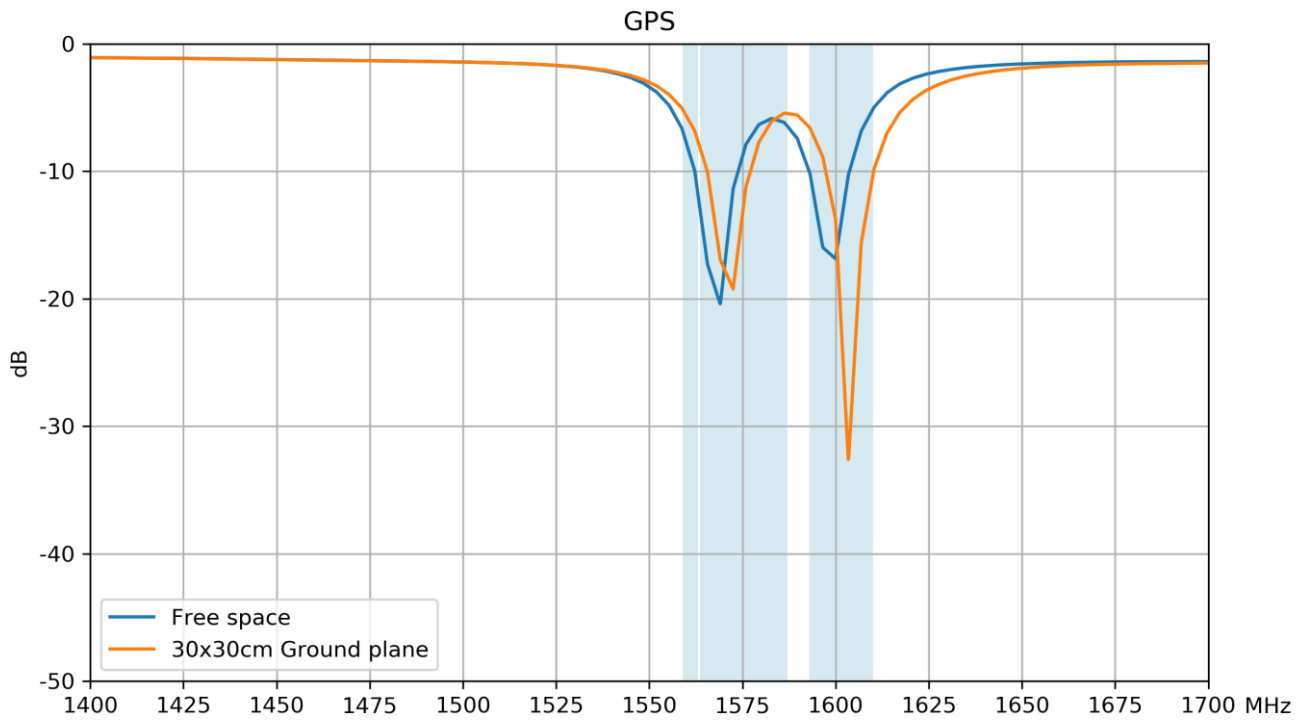


3.2 Return Loss – Cellular

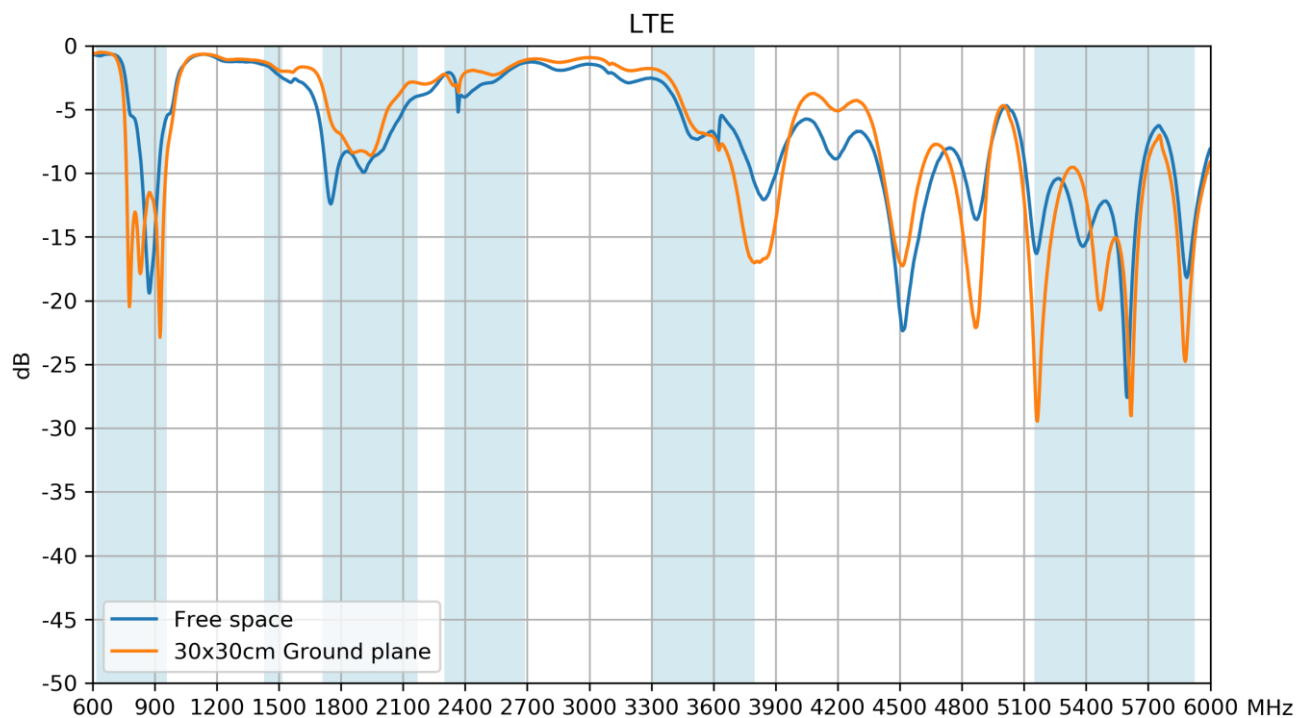


3.3 Efficiency – GNSS

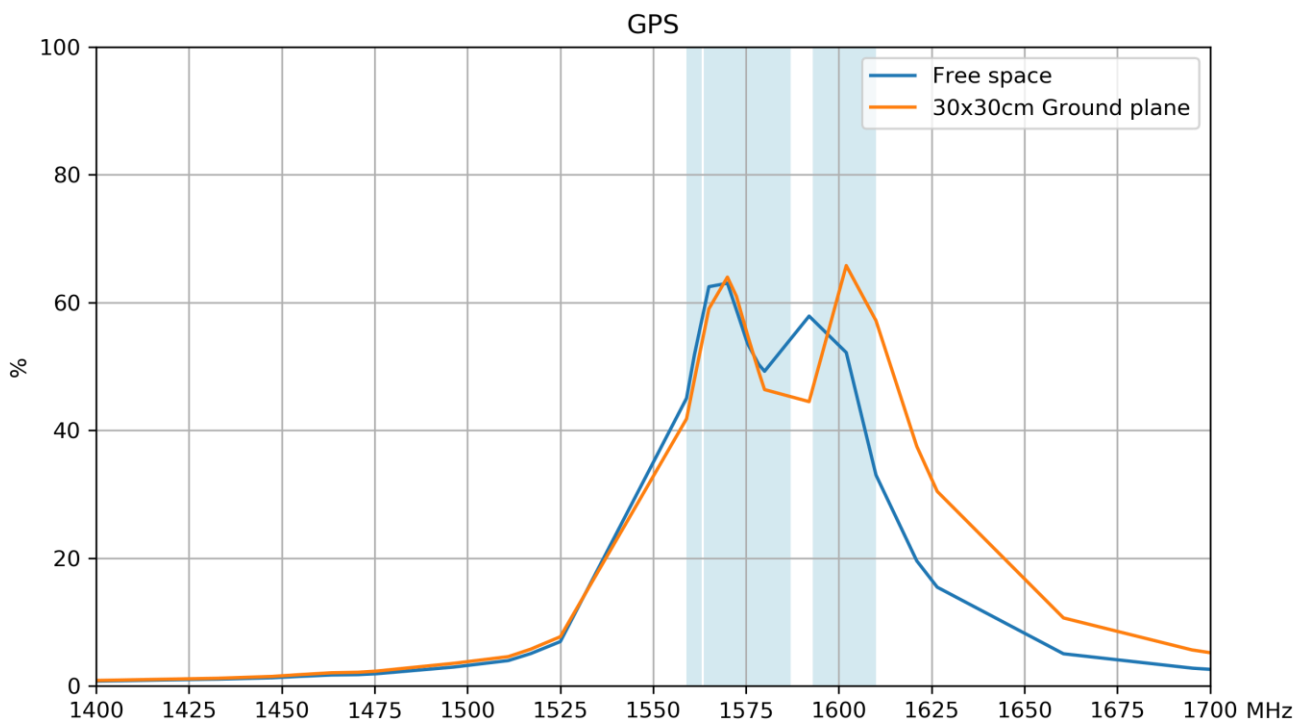


3.4 Efficiency – Cellular

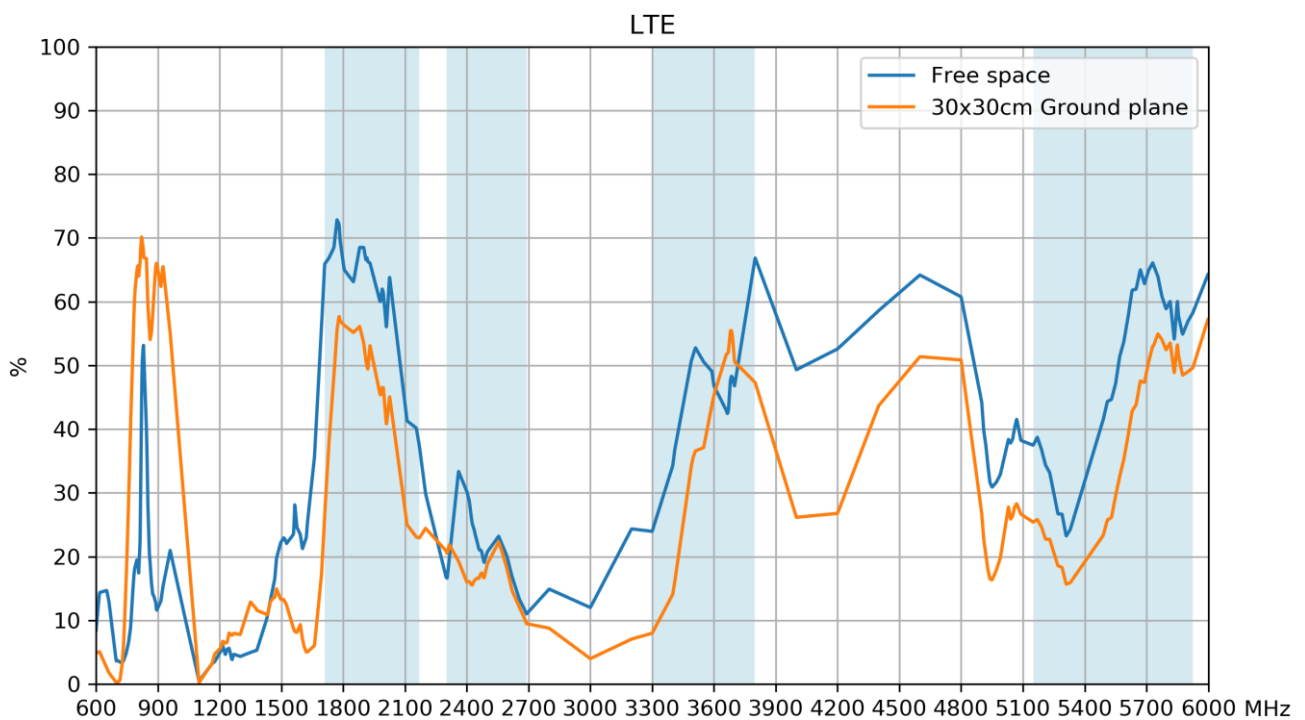


3.5 Average Gain – GNSS

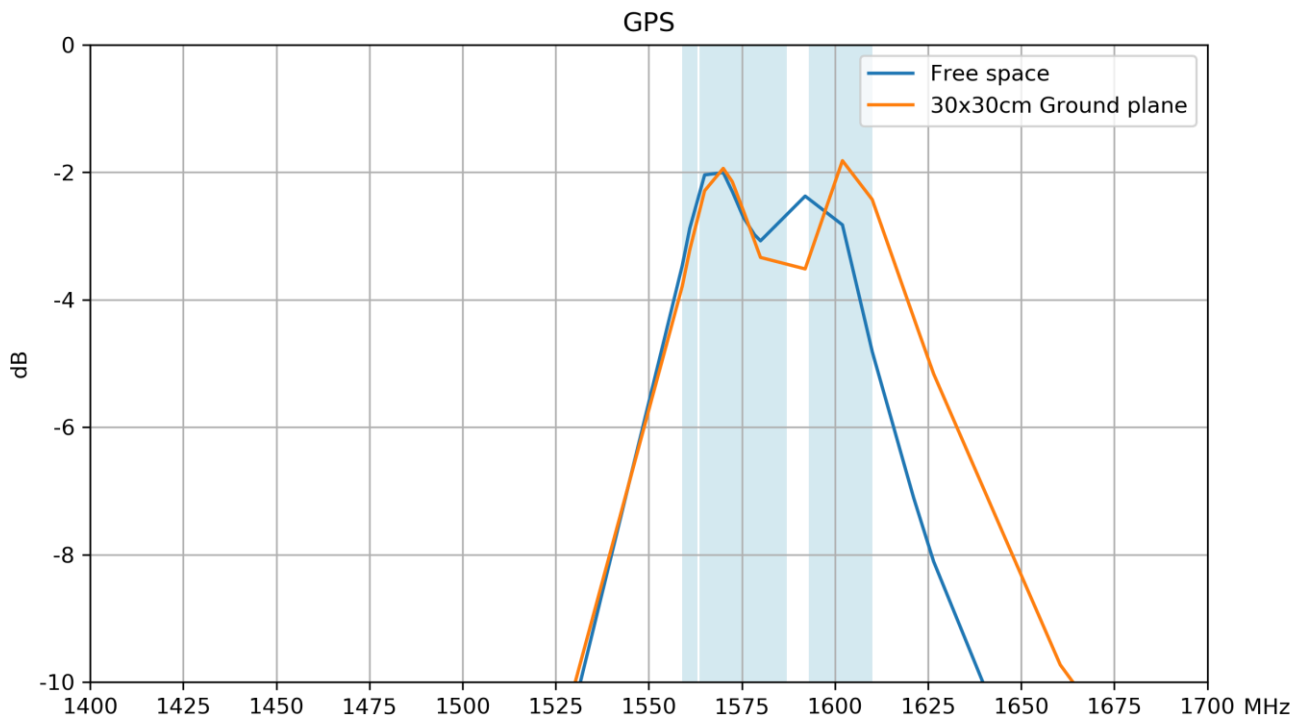


3.6 Average Gain – Cellular

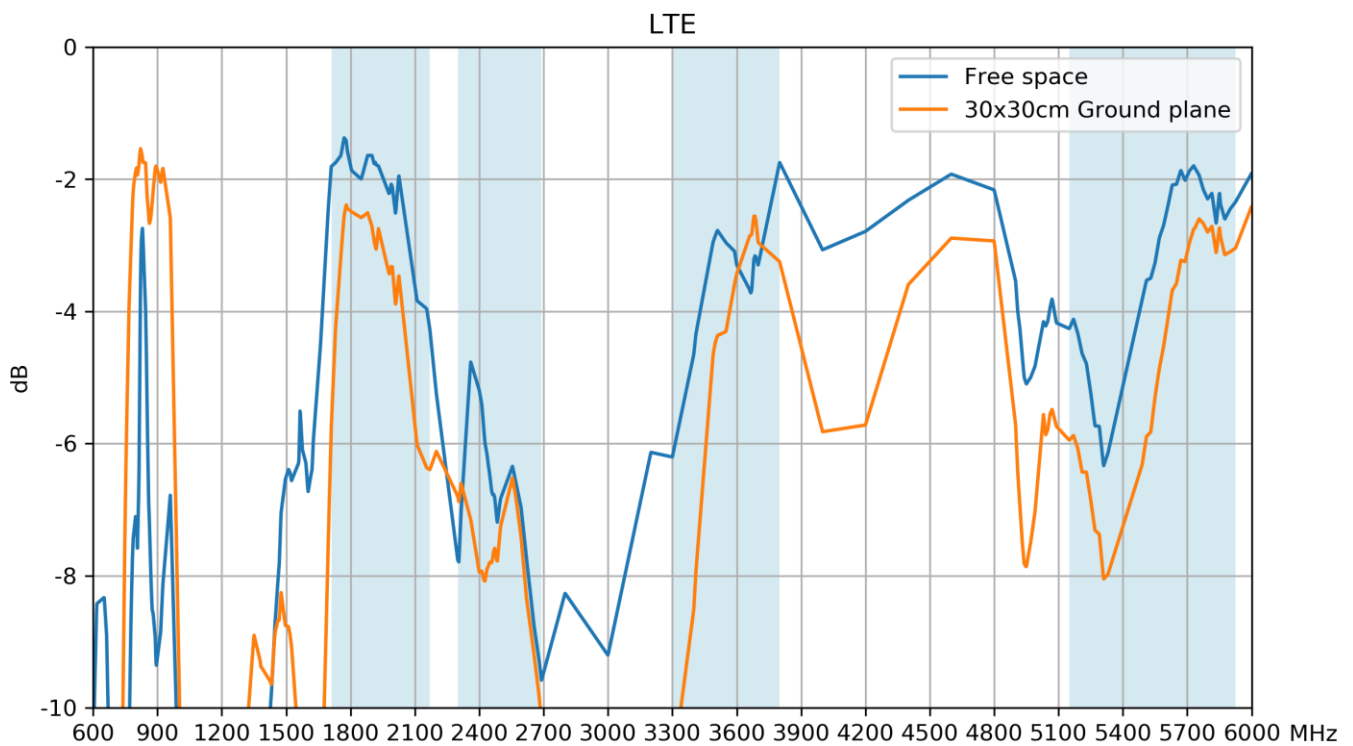


3.7 Peak Gain – GNSS

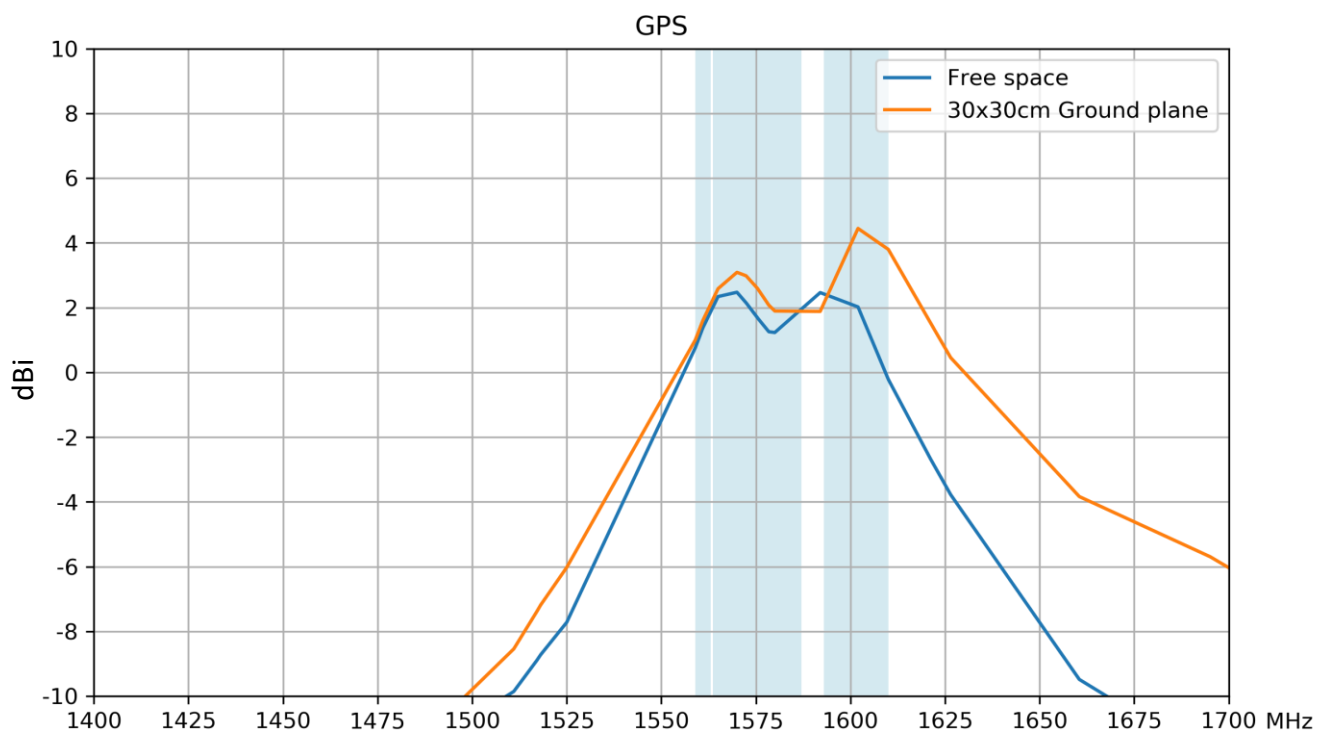

3.8 Peak Gain – Cellular

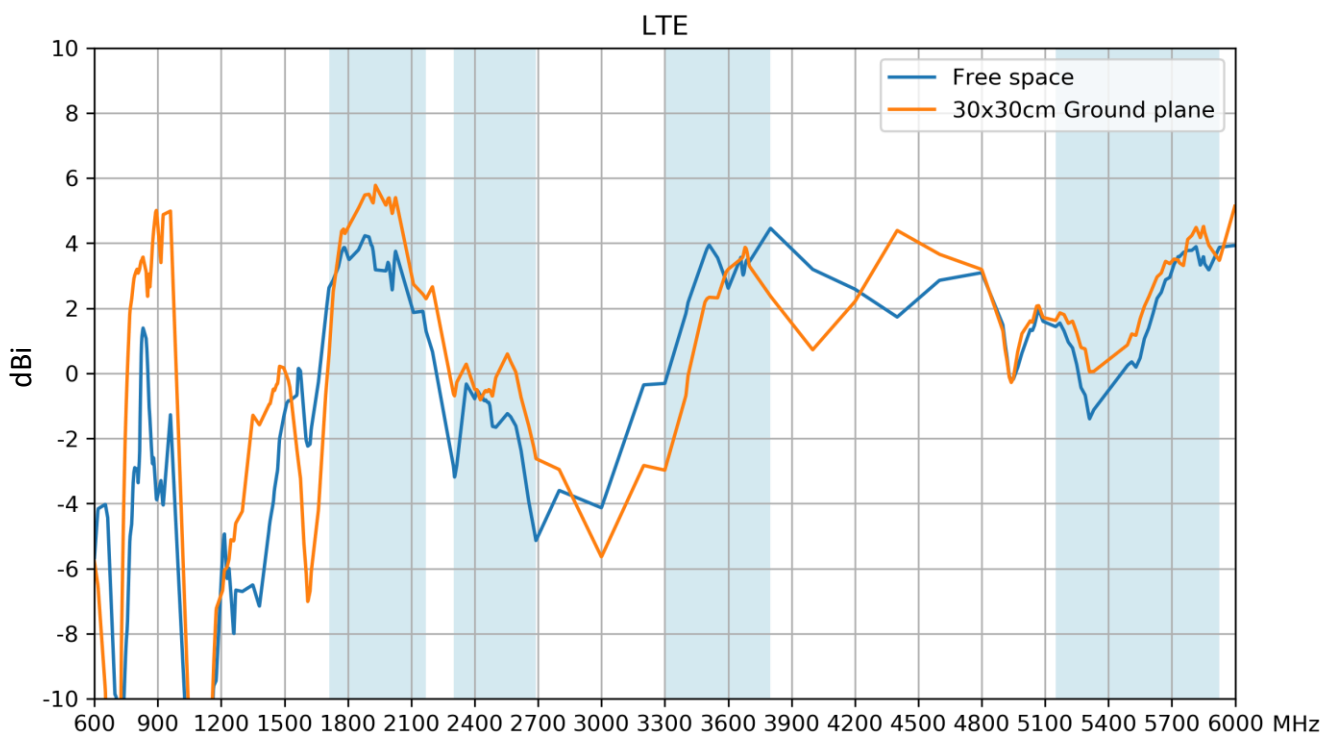


3.9 Isolation

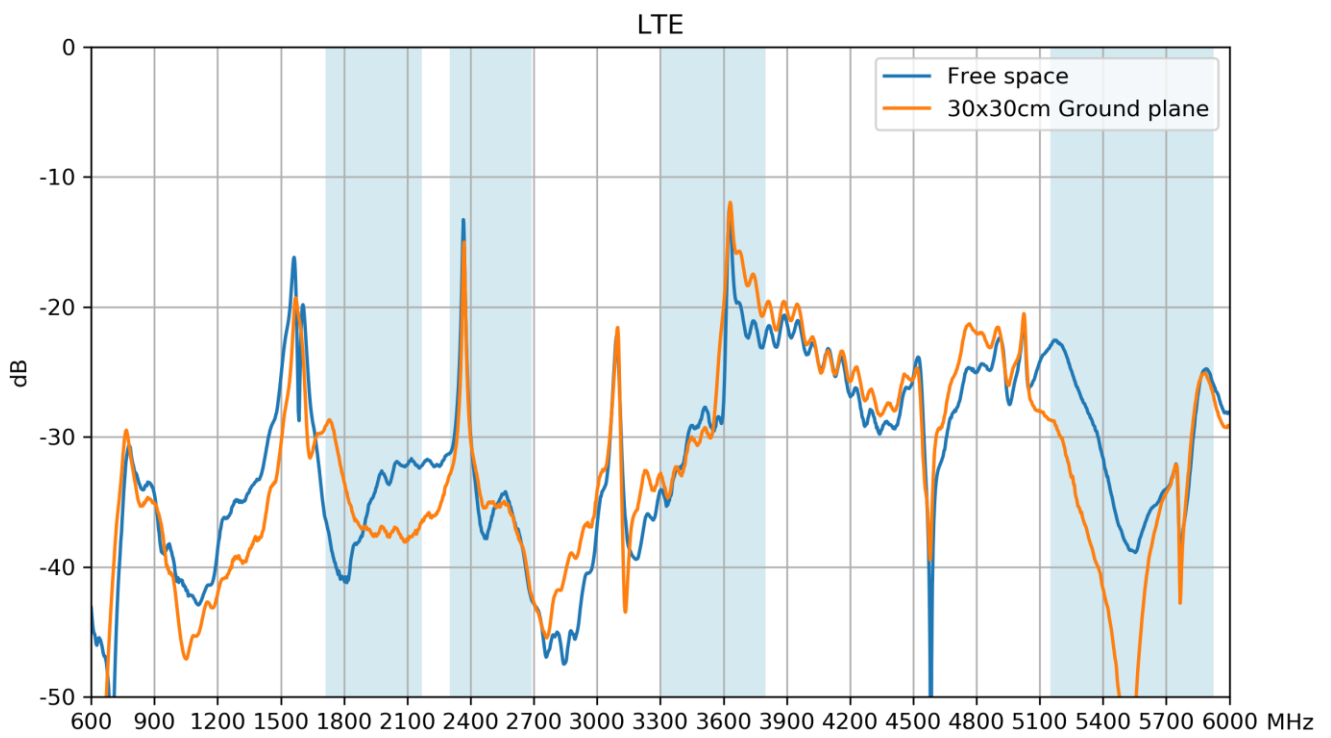


4. Active Antenna Characteristics


4.1 Block Diagram

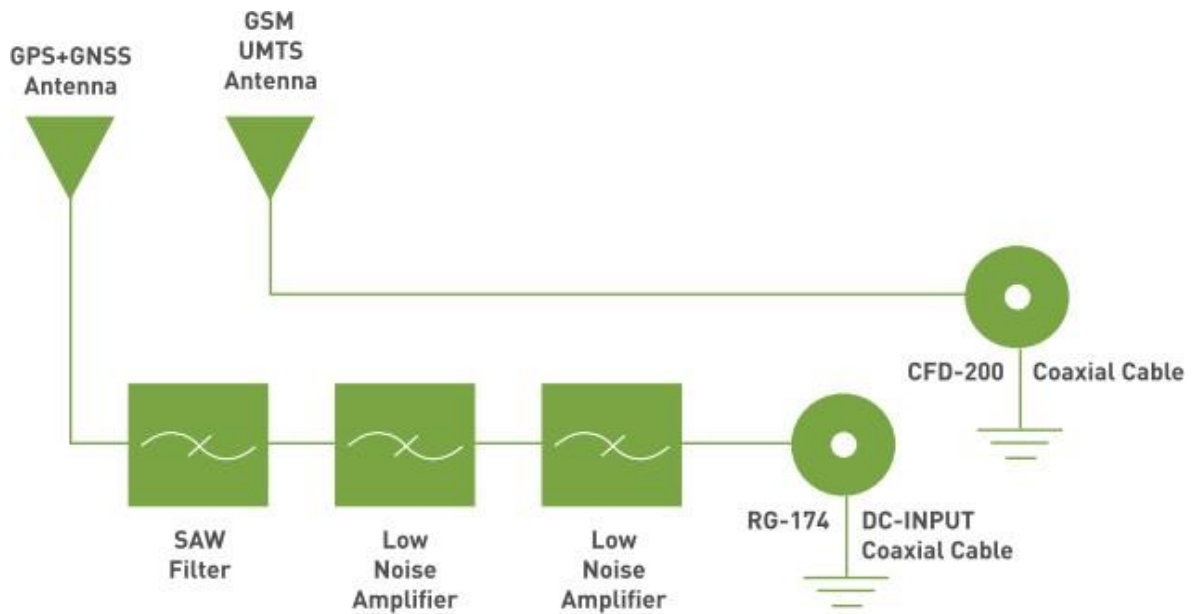


4.2 Block Diagram

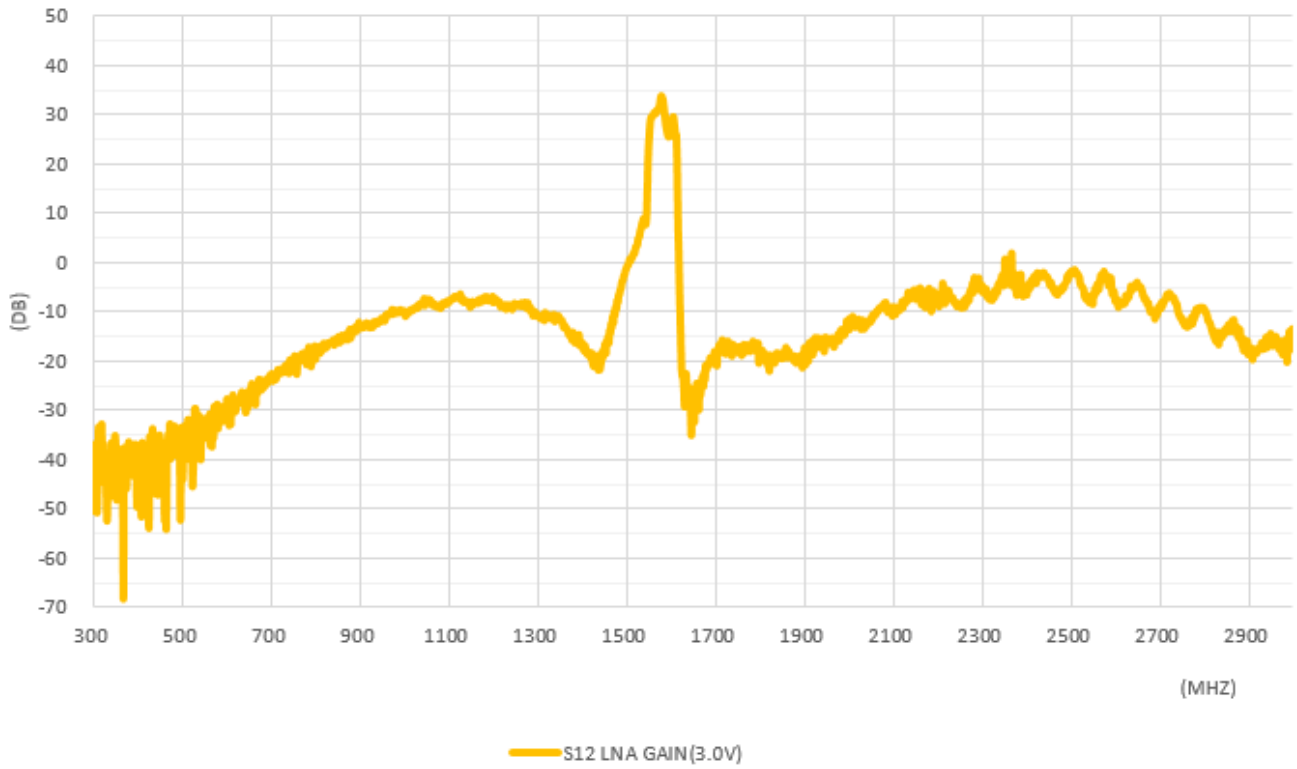


4.3 LNA Gain and Noise Figure @ 3.0V

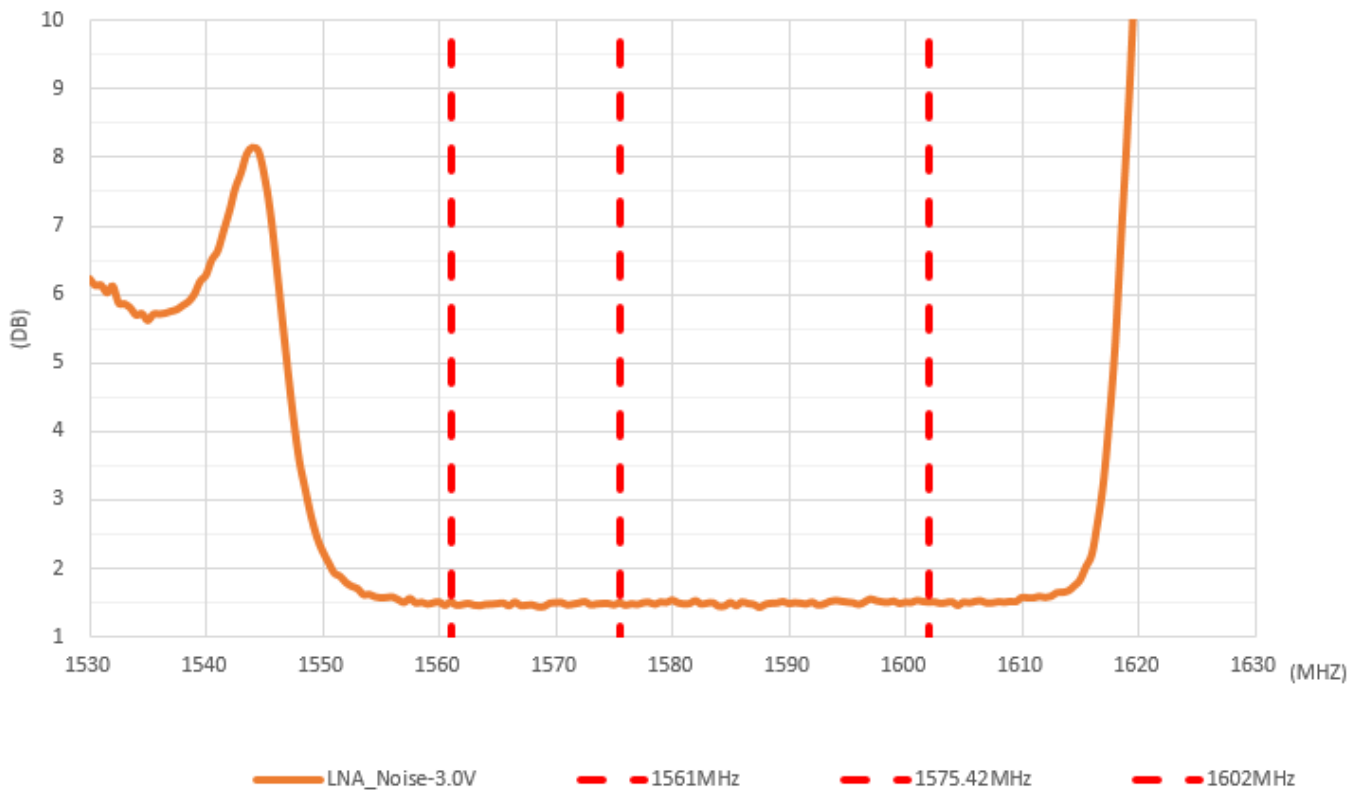



4.4 Axial Ratio – BeiDou

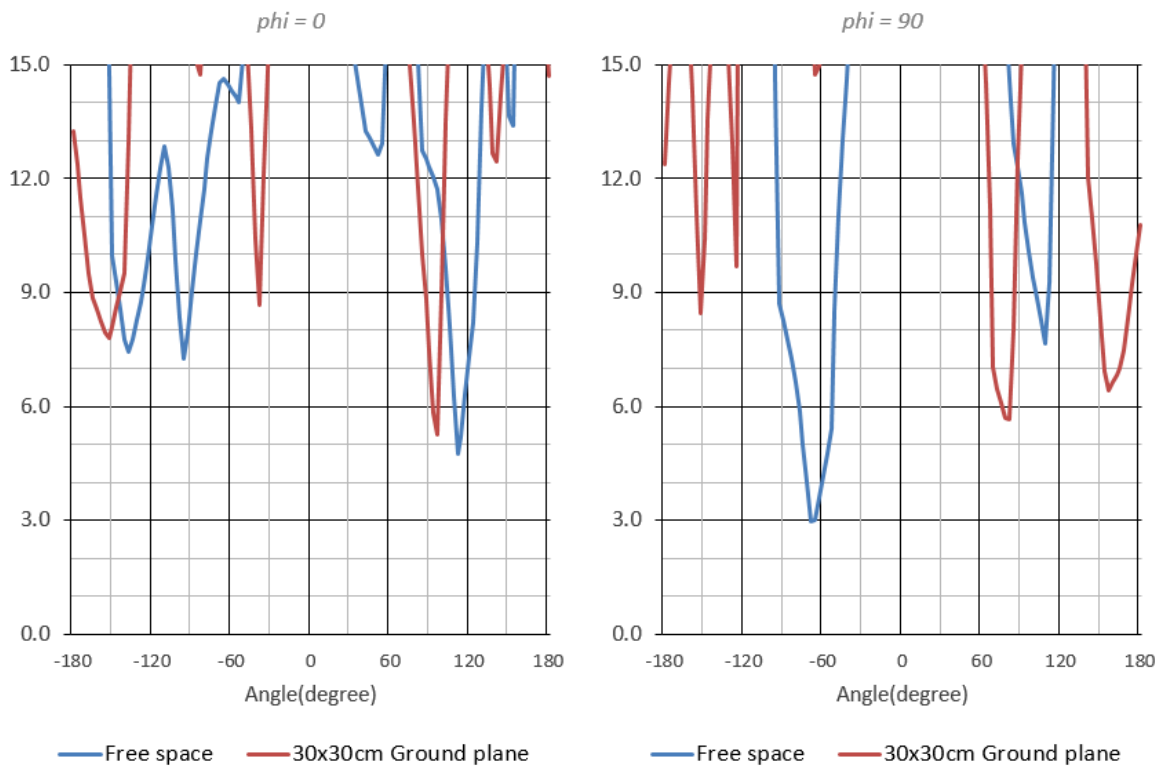

4.5 Axial Ratio – GPS/Galileo

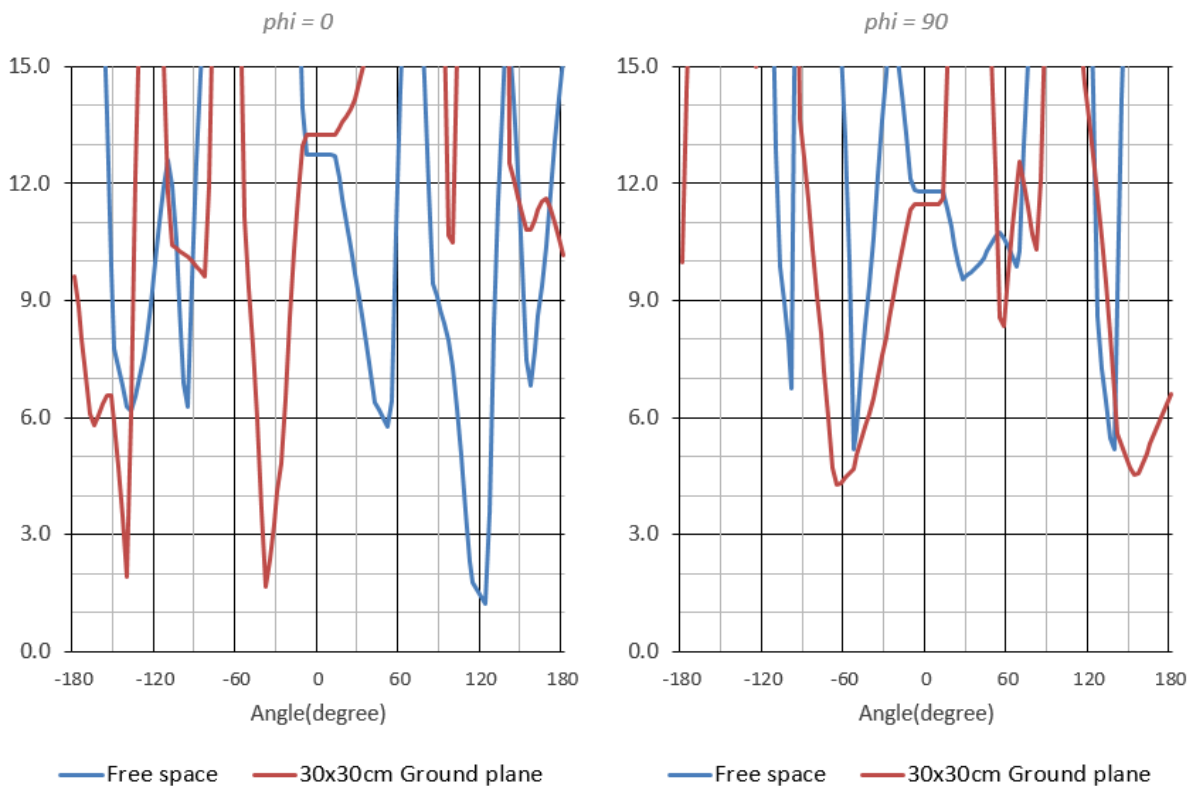

4.6 Axial Ratio – GLONASS

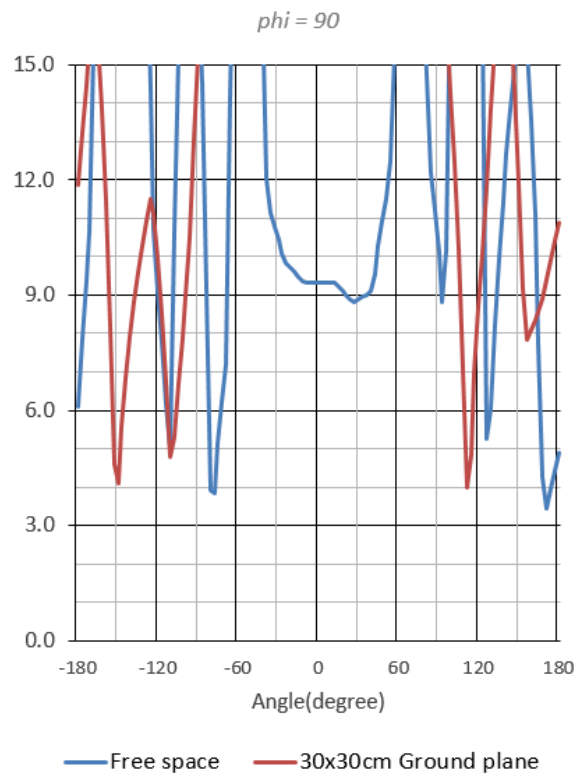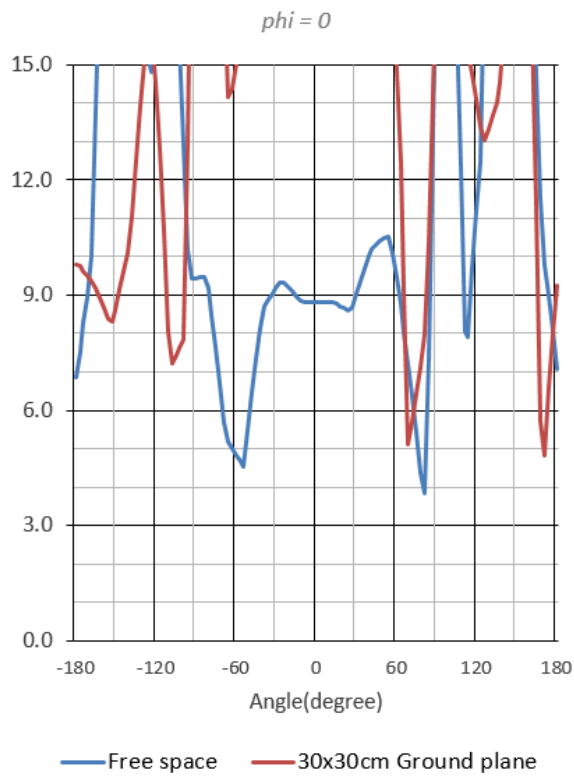



5. Radiation Patterns

5.1 Test Setup – 30*30cm Ground Plane




5.2 GNSS 3D and 2D Radiation Patterns – 30*30cm Ground Plane


1561MHz

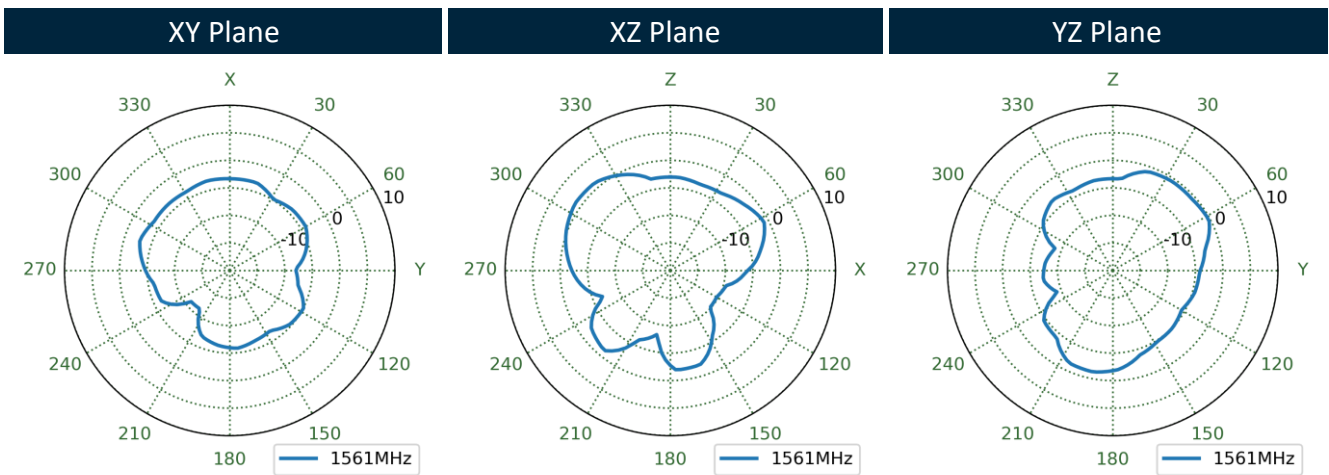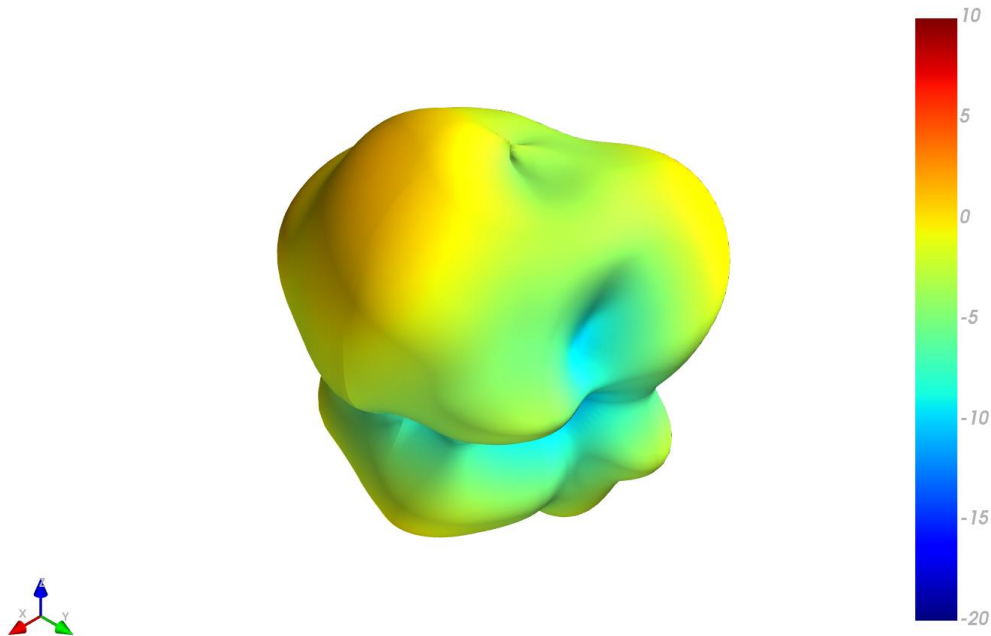


1575.42MHz

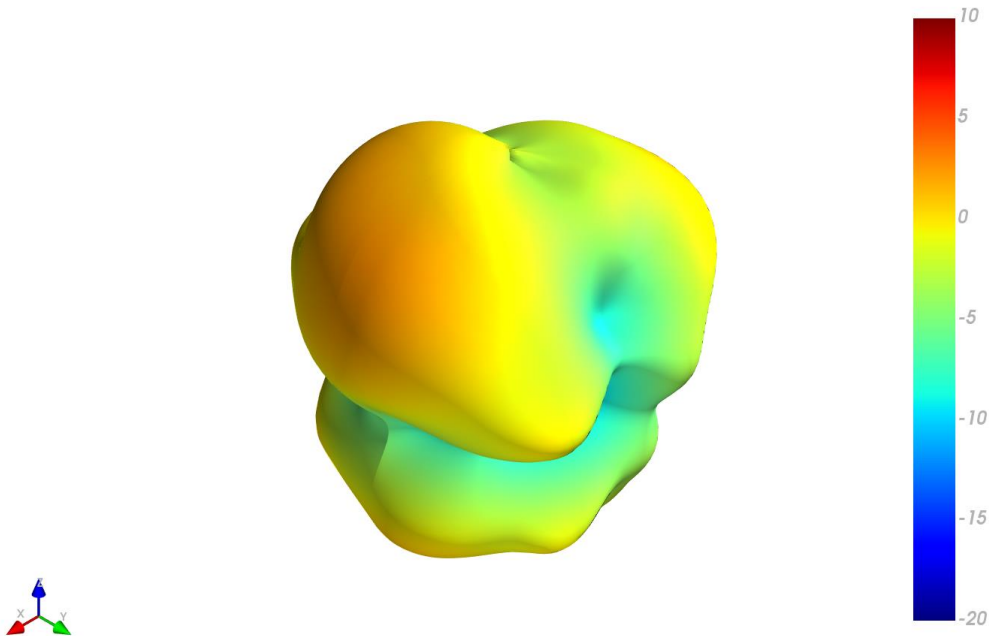


XY Plane

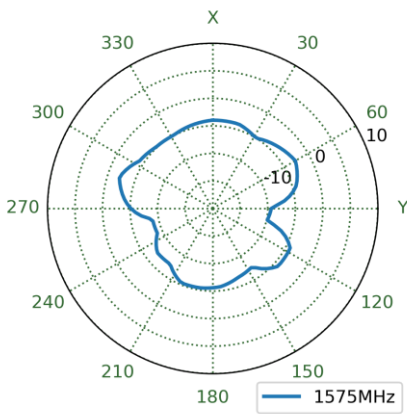


XZ Plane

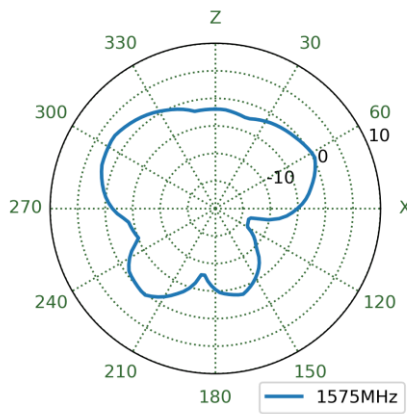


YZ Plane

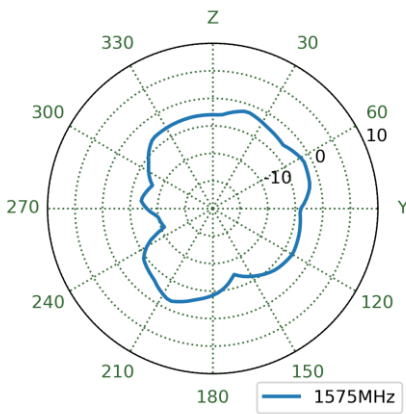


1602MHz

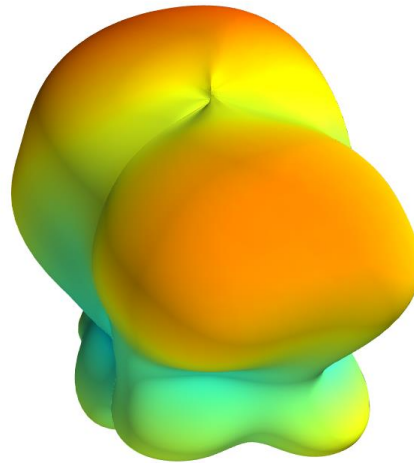


XY Plane

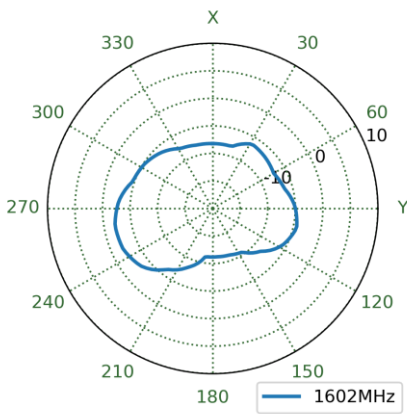

XZ Plane


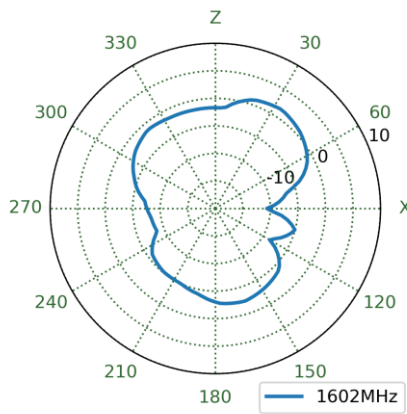


YZ Plane

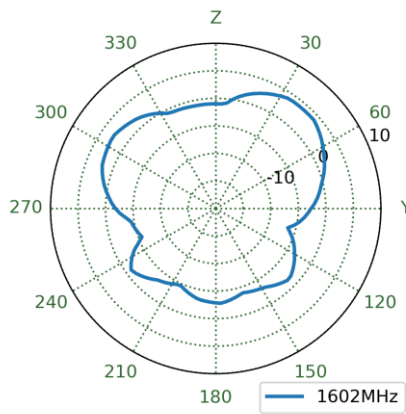


5.3 Cellular 3D and 2D Radiation Patterns – 30*30cm Ground Plane


751MHz

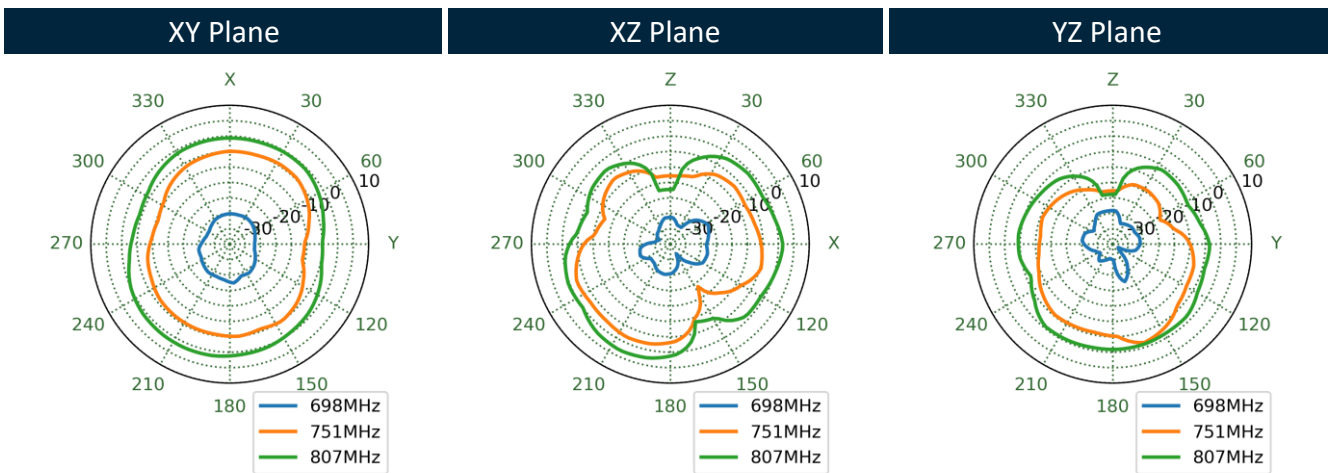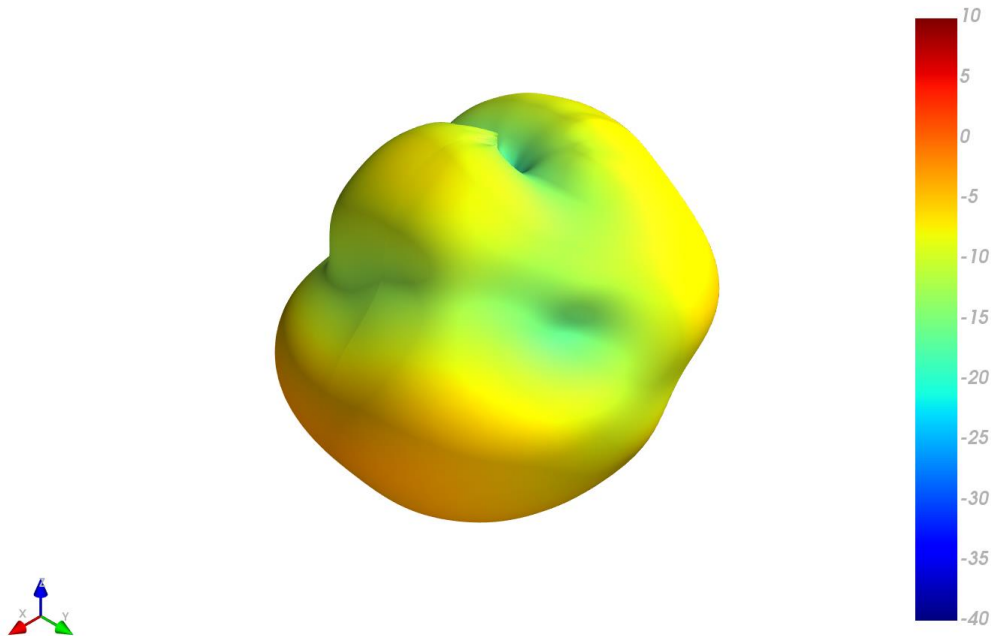


890MHz

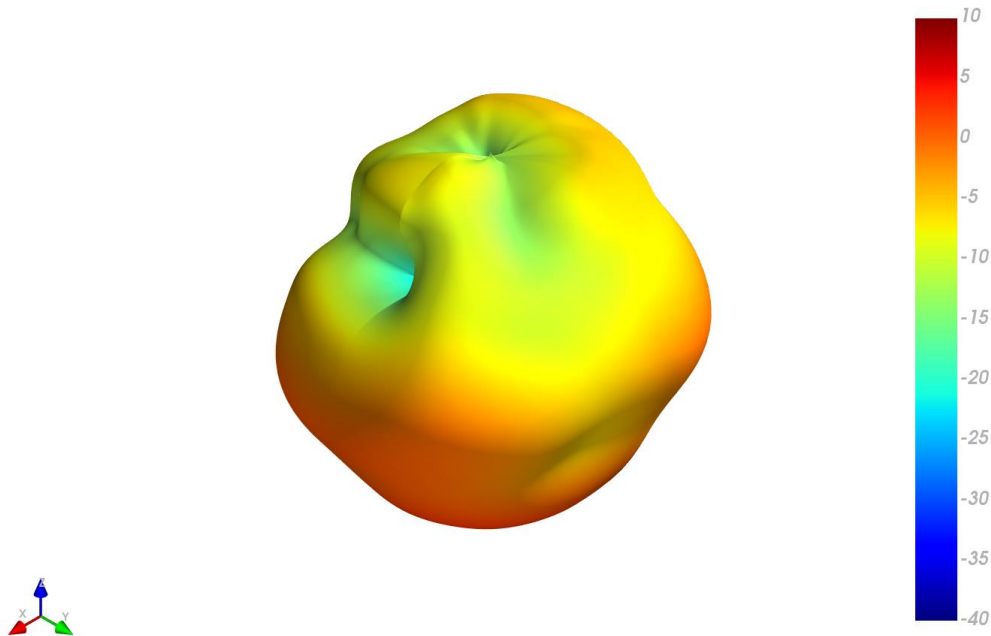


XY Plane

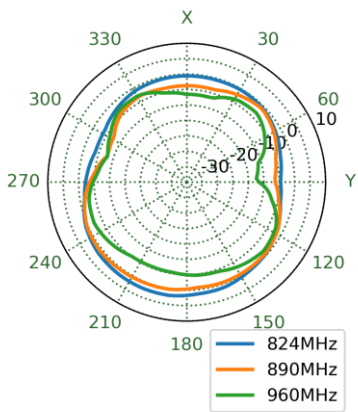


XZ Plane

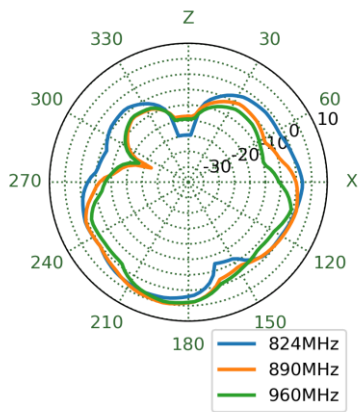


YZ Plane

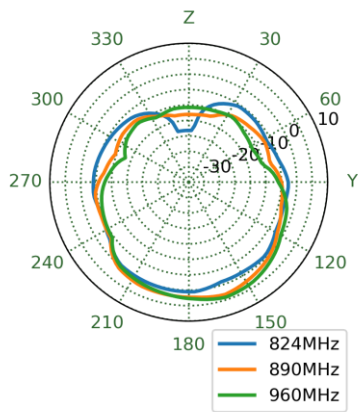


1805MHz

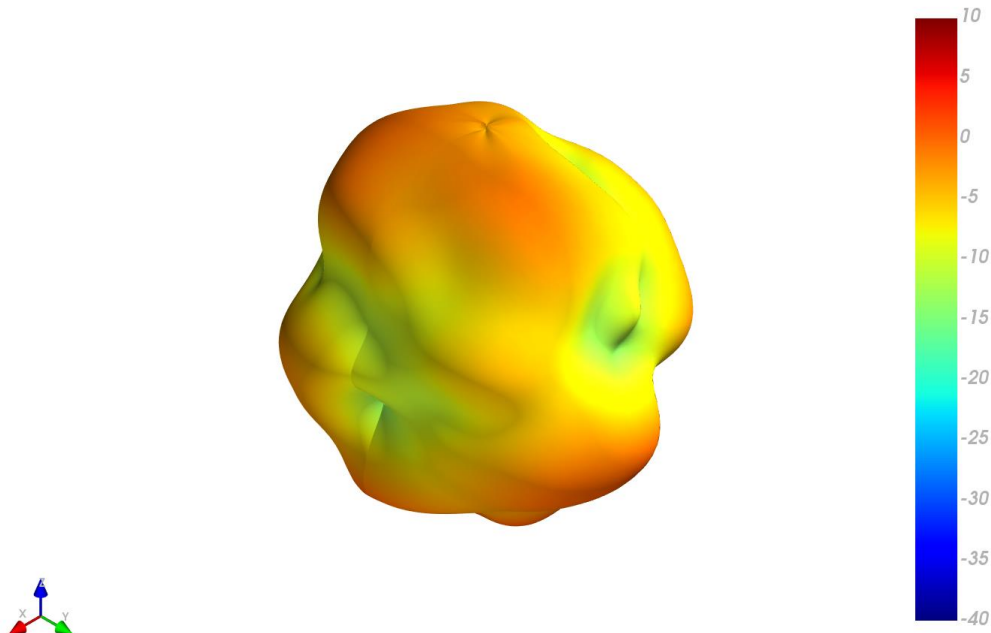


XY Plane

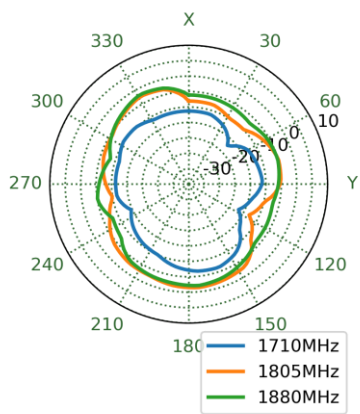


XZ Plane

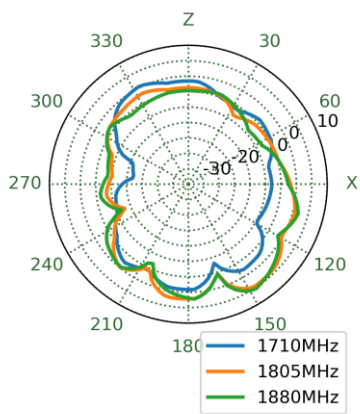


YZ Plane

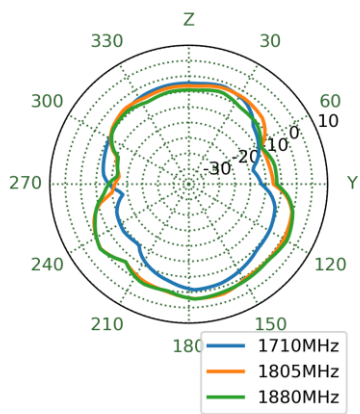


1920MHz

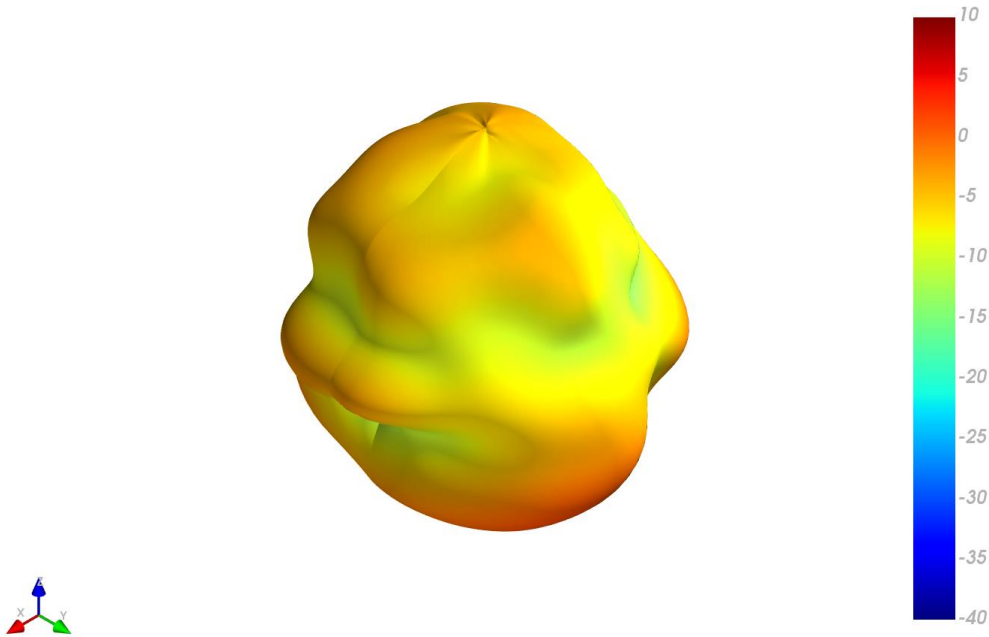


XY Plane

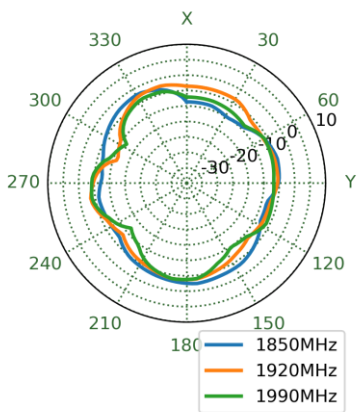


XZ Plane

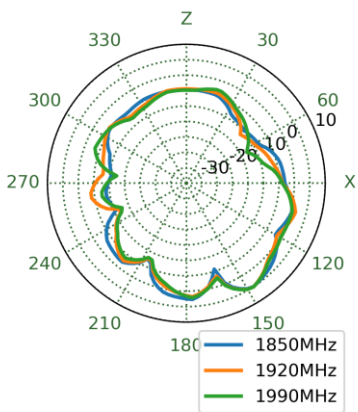


YZ Plane

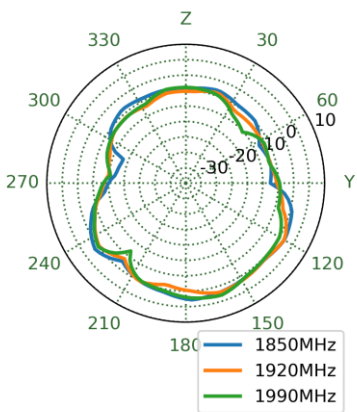


1990MHz

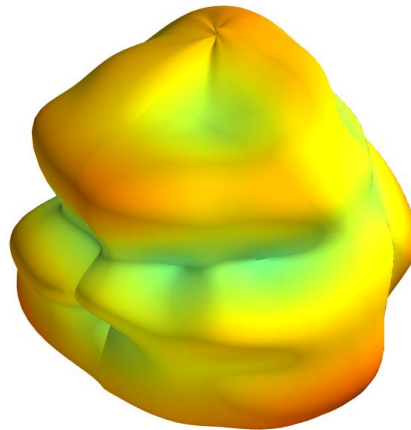


XY Plane

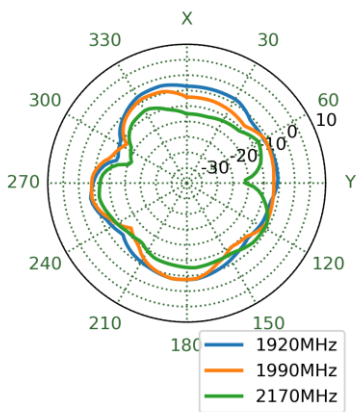


XZ Plane

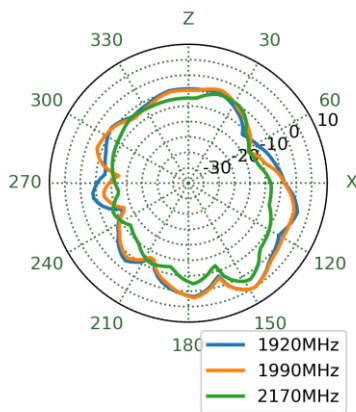


YZ Plane

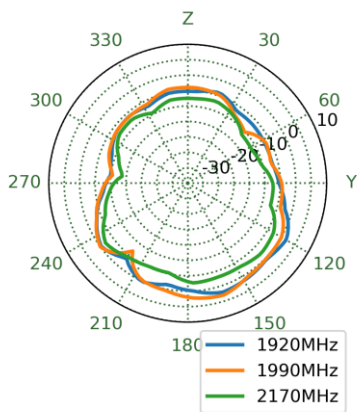


2595MHz

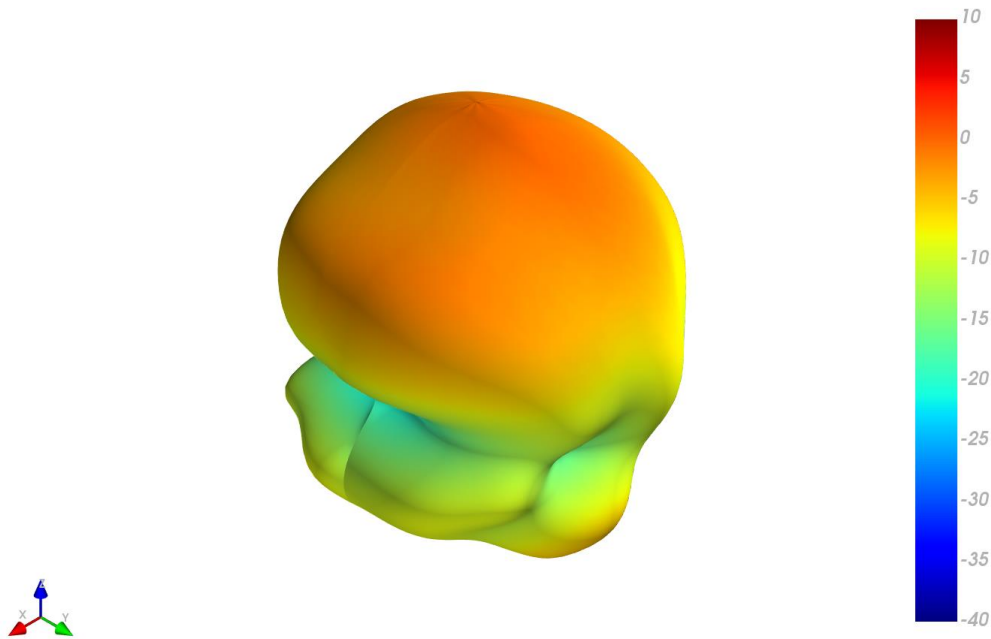


XY Plane

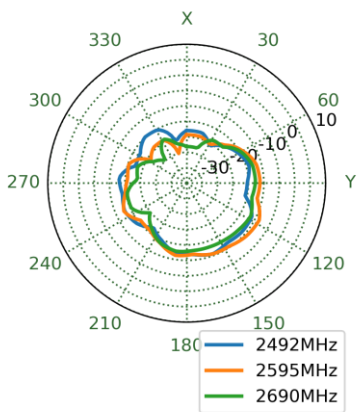


XZ Plane

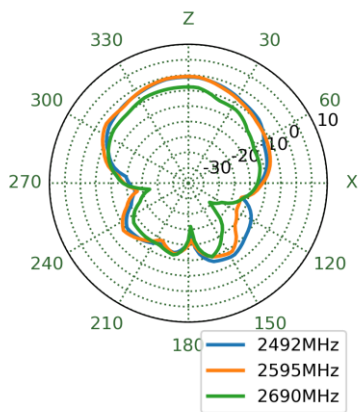


YZ Plane

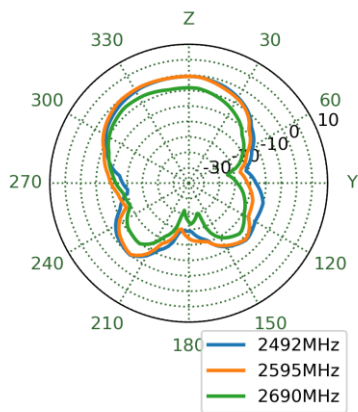


3550MHz

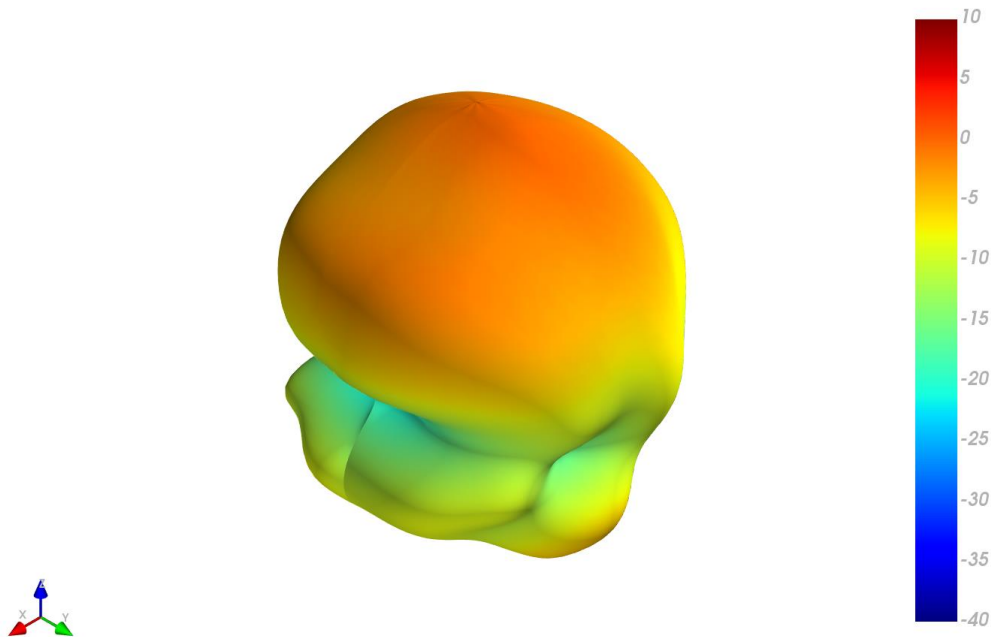


XY Plane

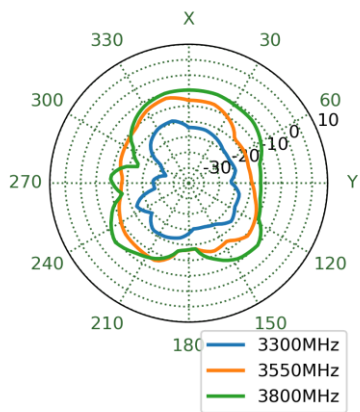


XZ Plane

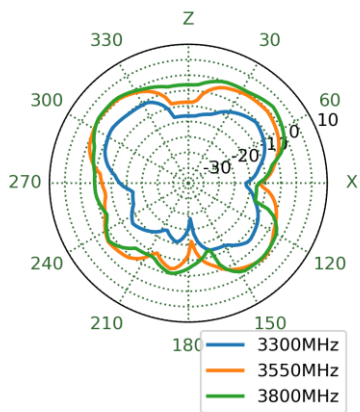

YZ Plane


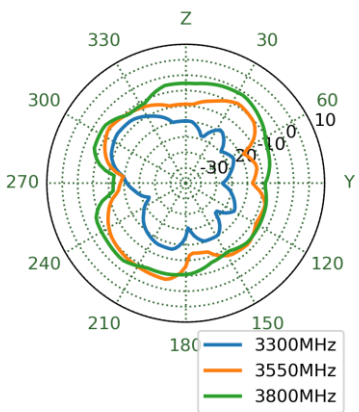


5.4 Test Setup – Free Space


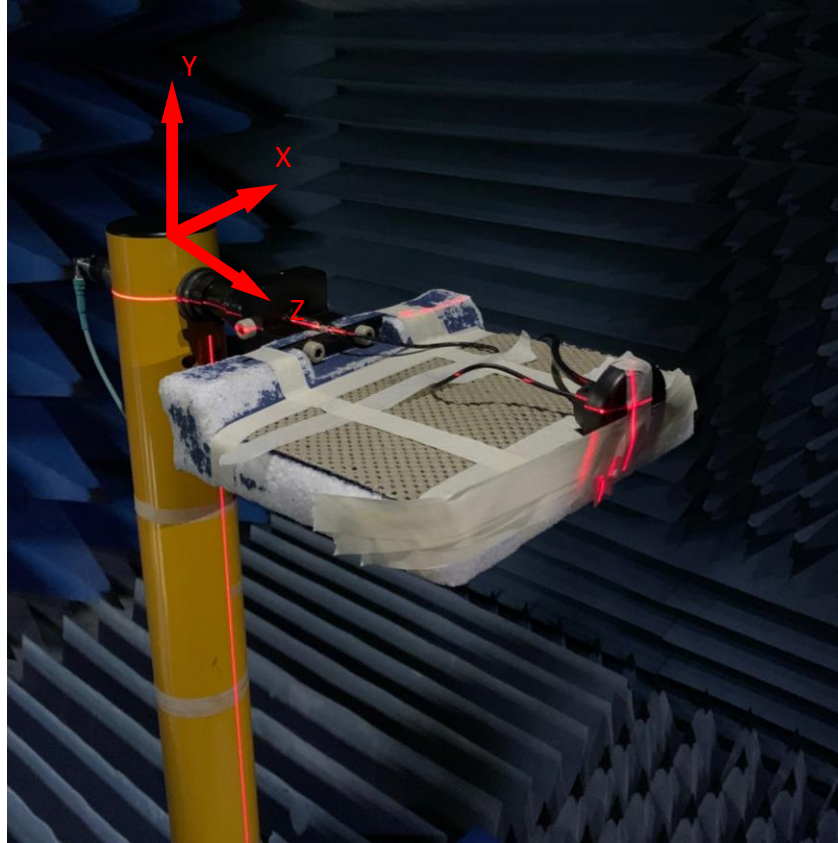


5.5 GNSS 3D and 2D Radiation Patterns – Free Space


1561MHz

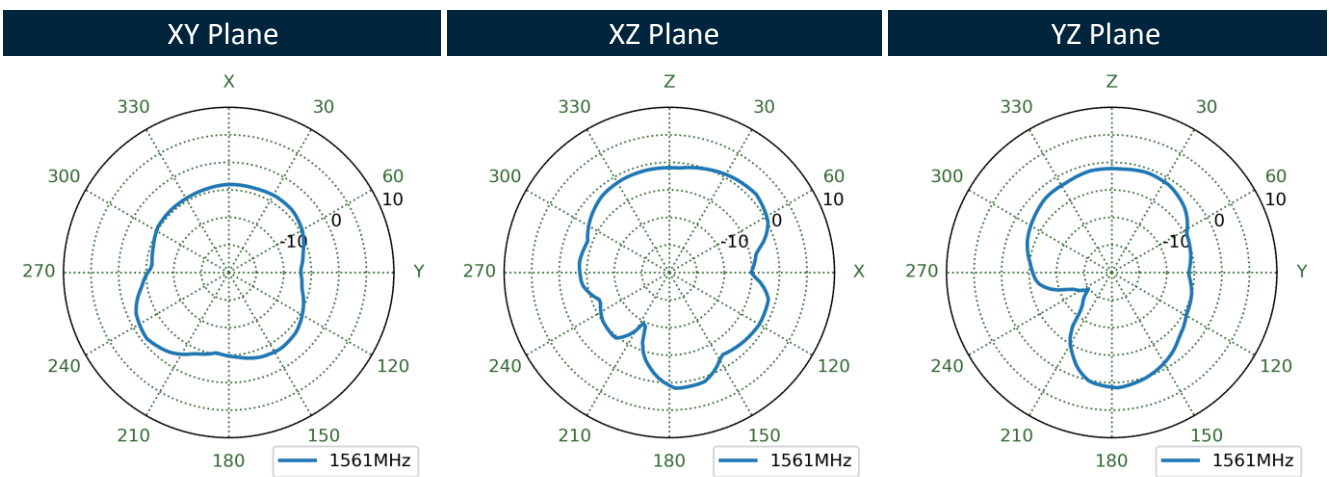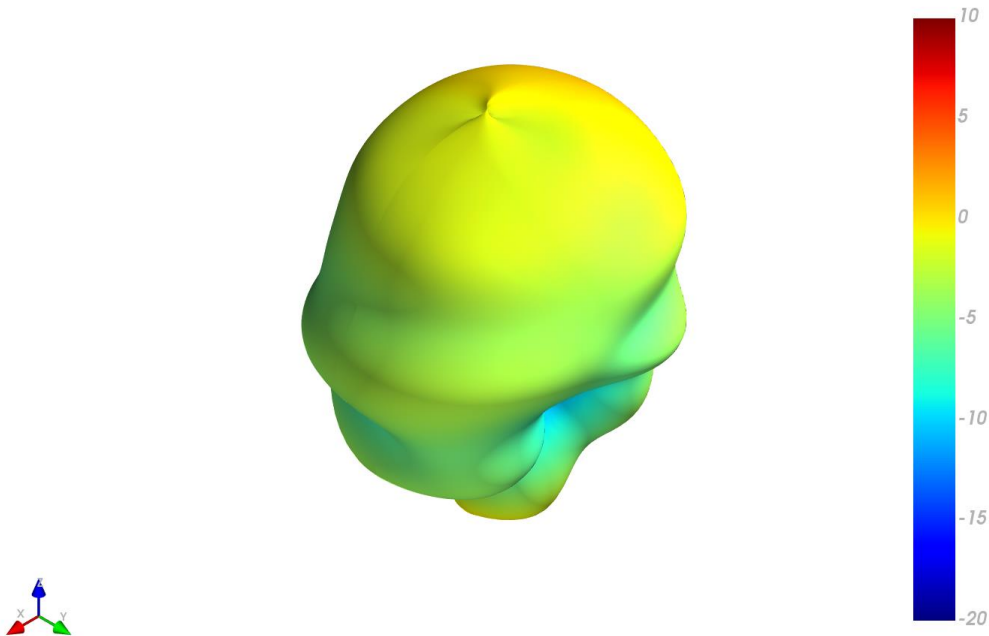


1575.42MHz

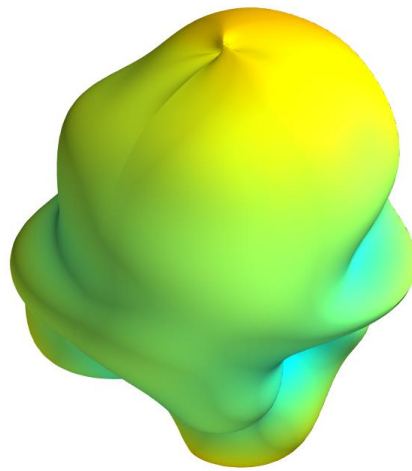


XY Plane

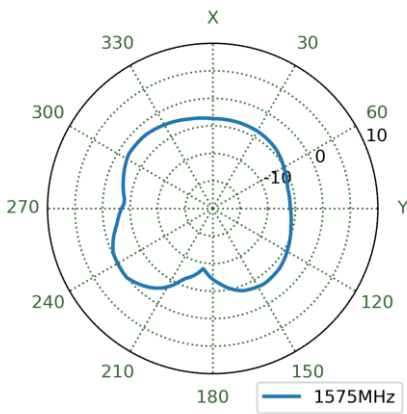


XZ Plane

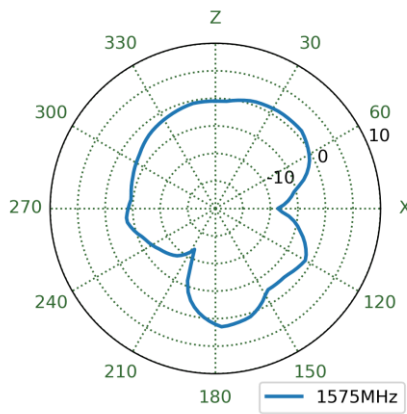


YZ Plane

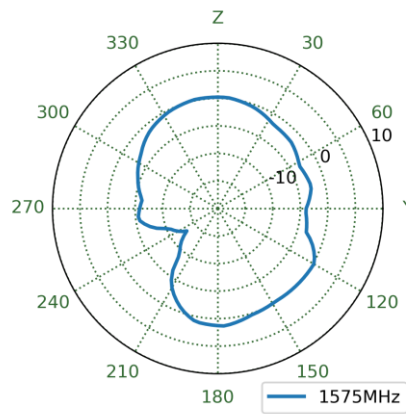


1602MHz

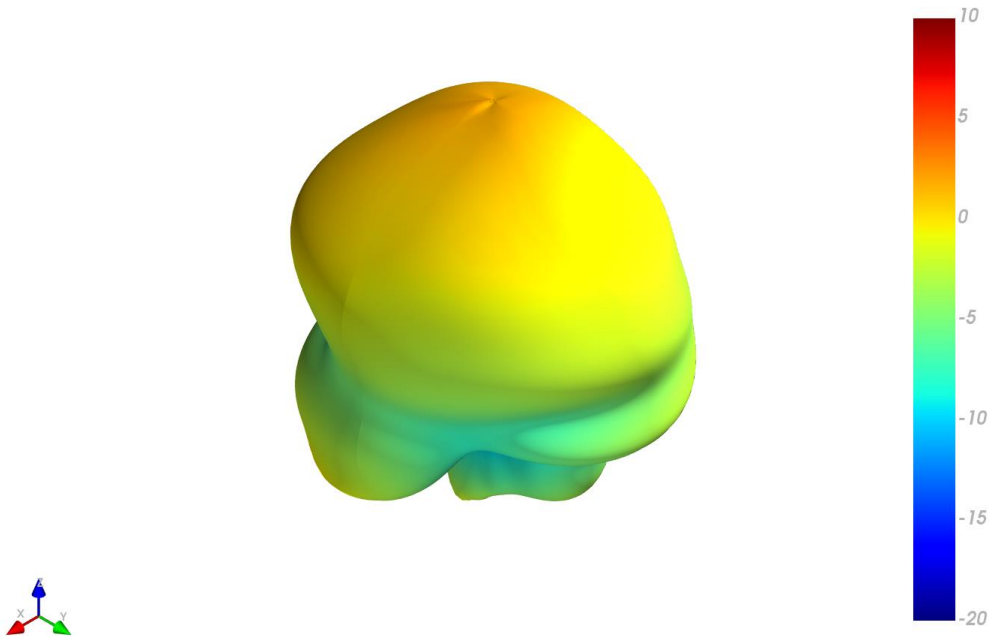


XY Plane

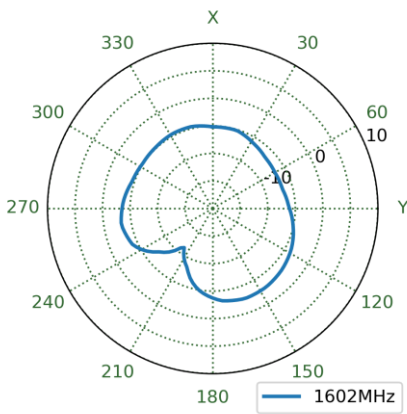

XZ Plane

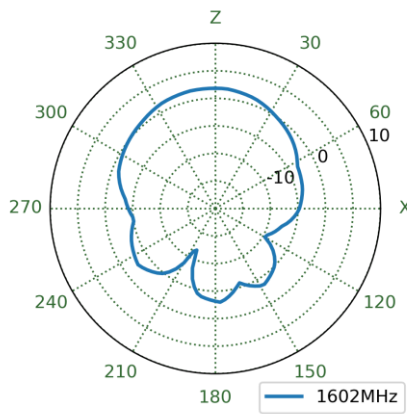


YZ Plane

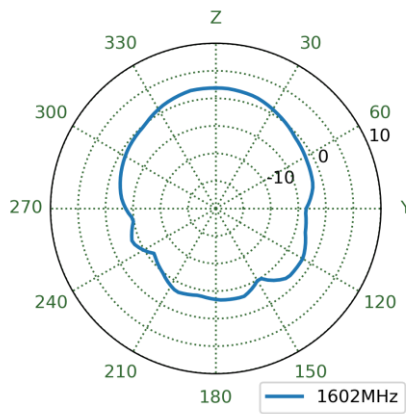


5.6 Cellular 3D and 2D Radiation Patterns – Free Space


751MHz

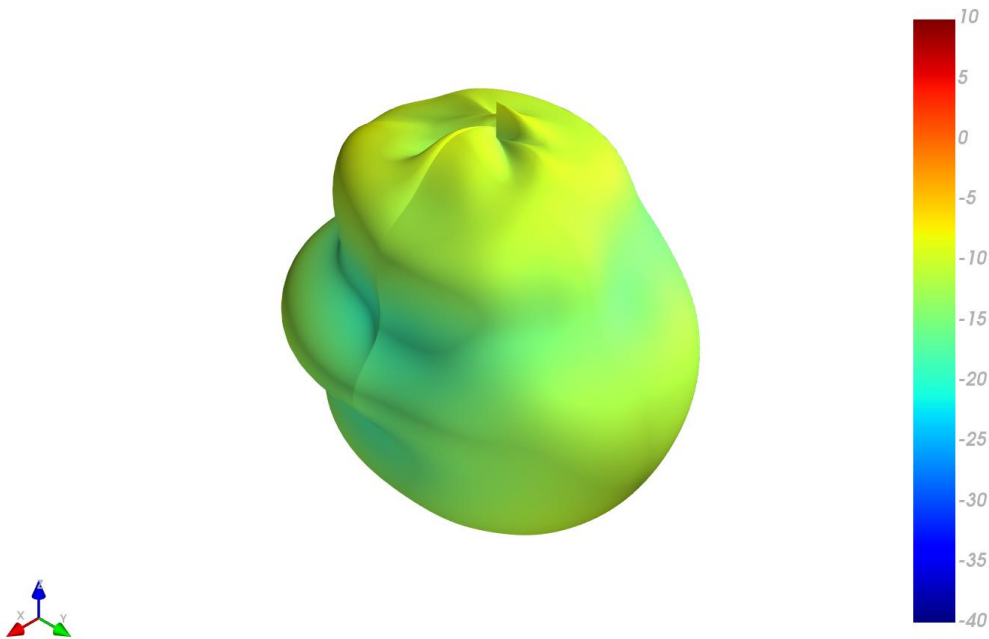


XY Plane

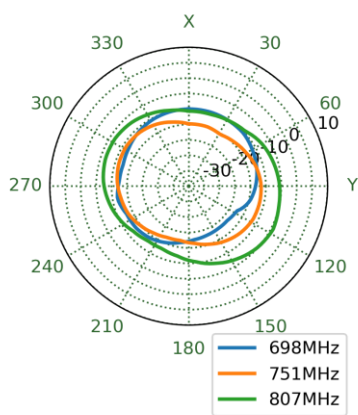


XZ Plane

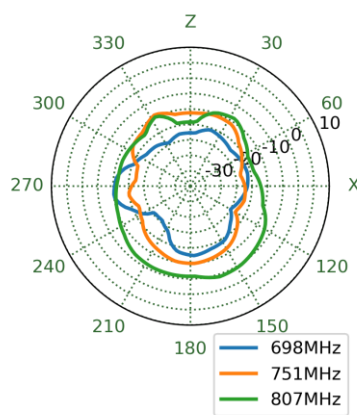


YZ Plane

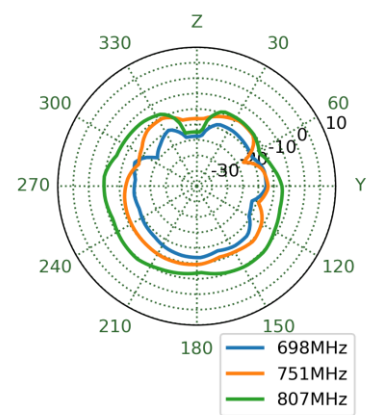


890MHz

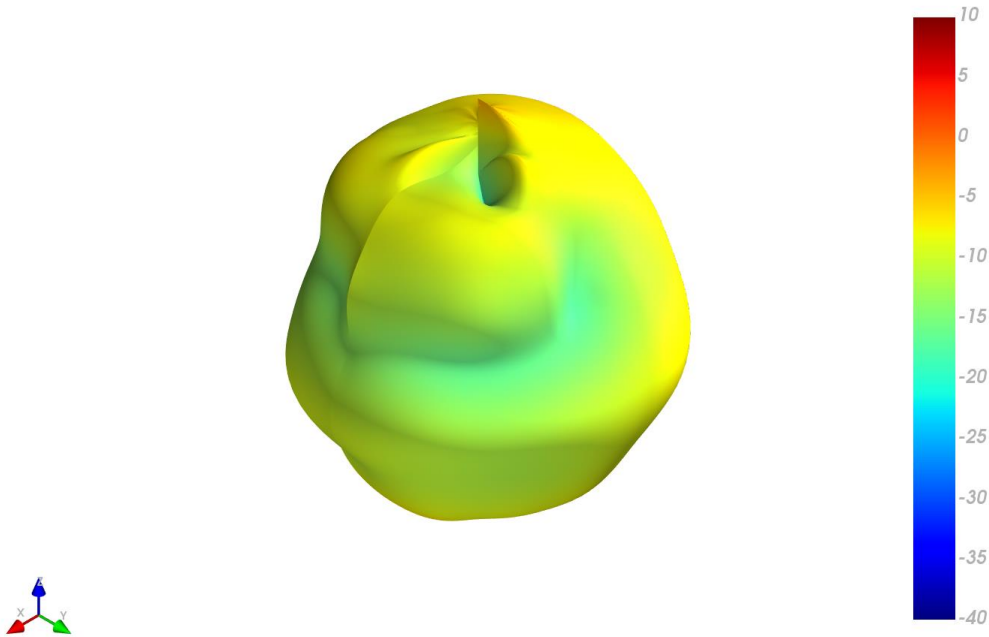


XY Plane

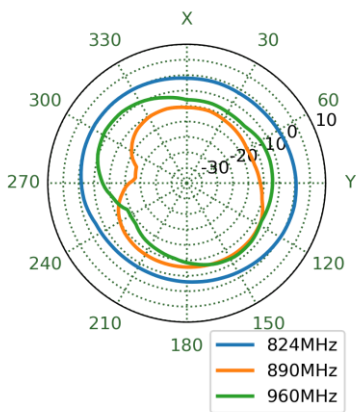


XZ Plane

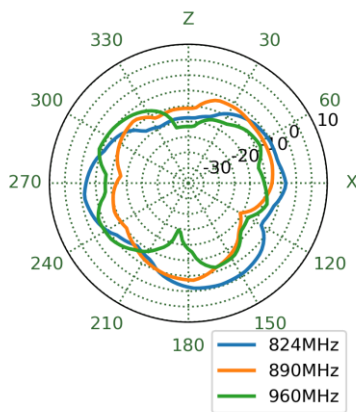


YZ Plane

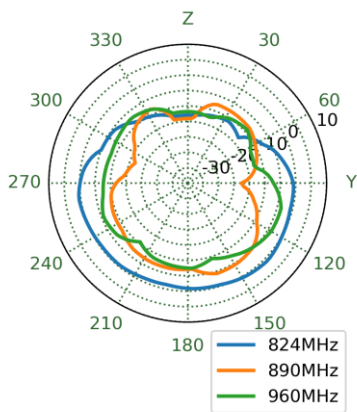


1805MHz

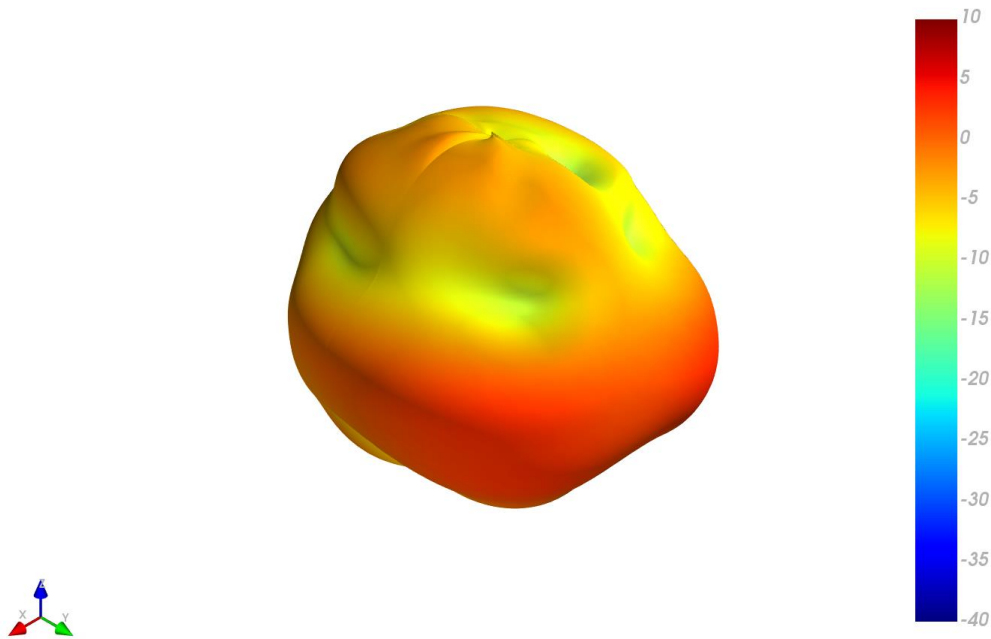


XY Plane

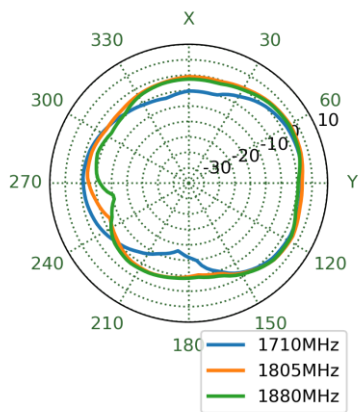


XZ Plane

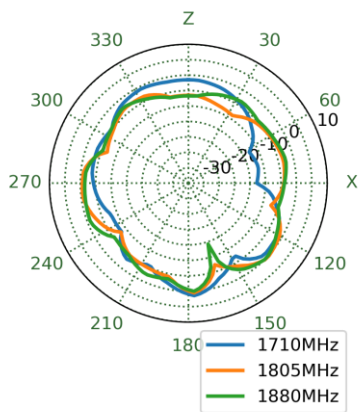


YZ Plane

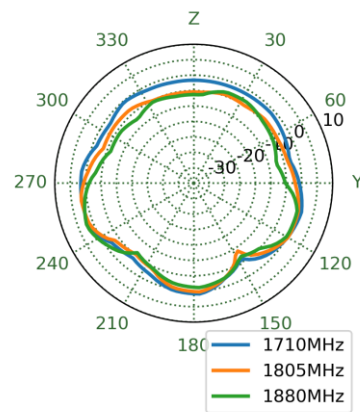


1920MHz

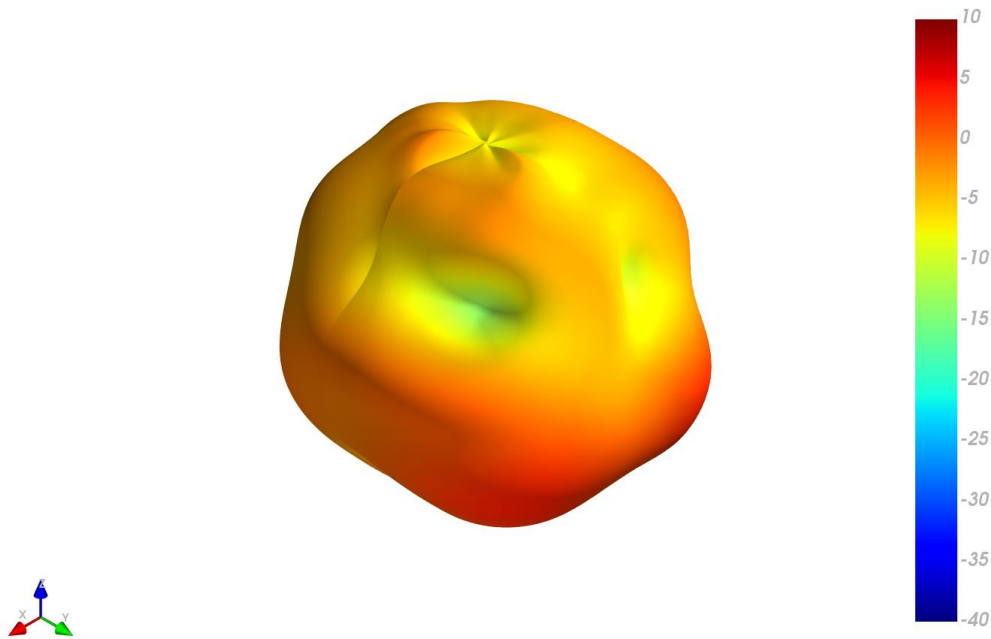


XY Plane

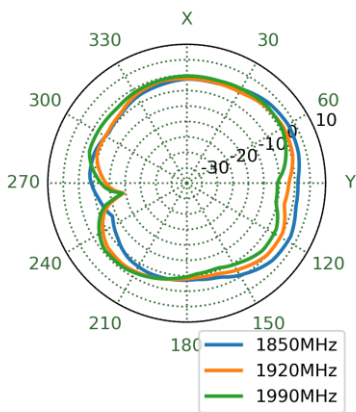


XZ Plane

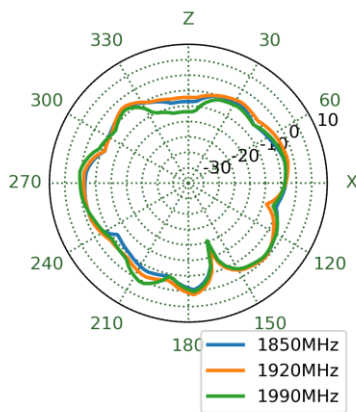


YZ Plane

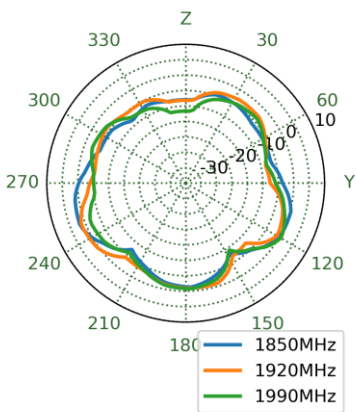


1990MHz

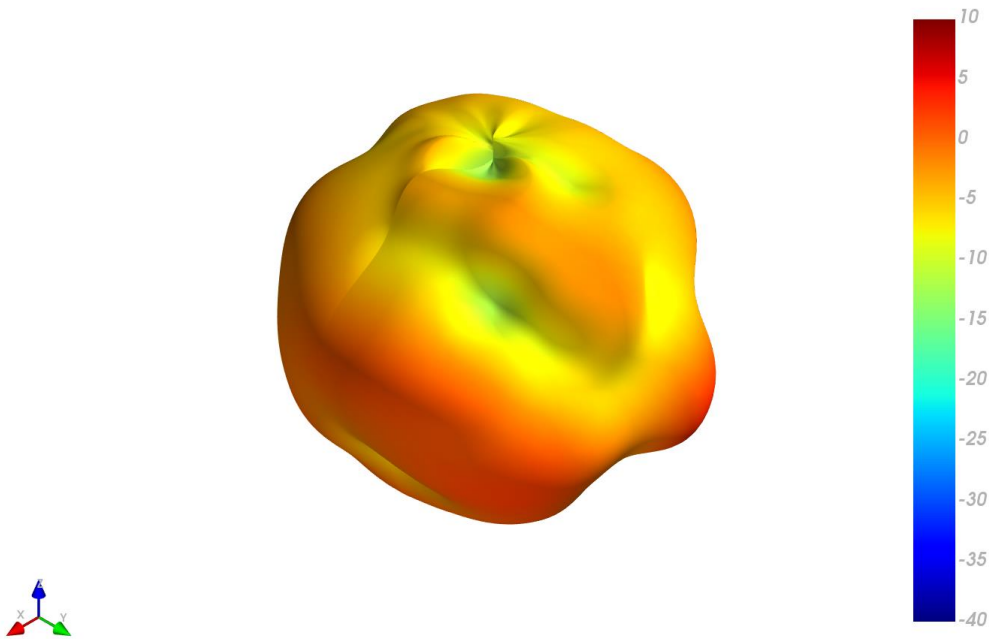


XY Plane

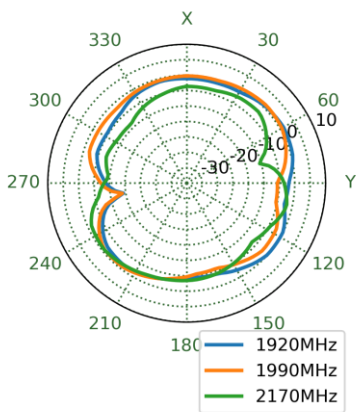


XZ Plane

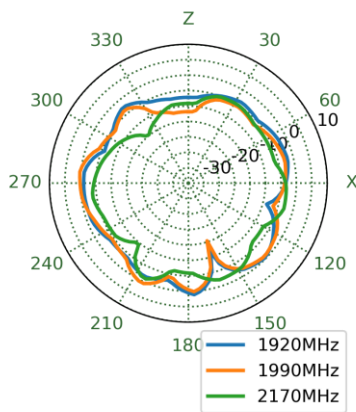


YZ Plane

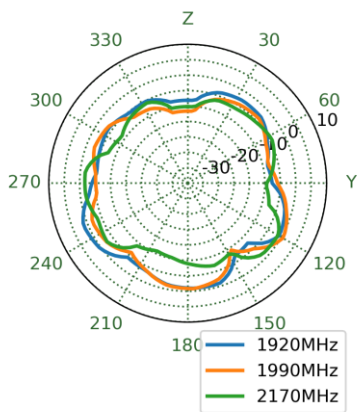


2595MHz

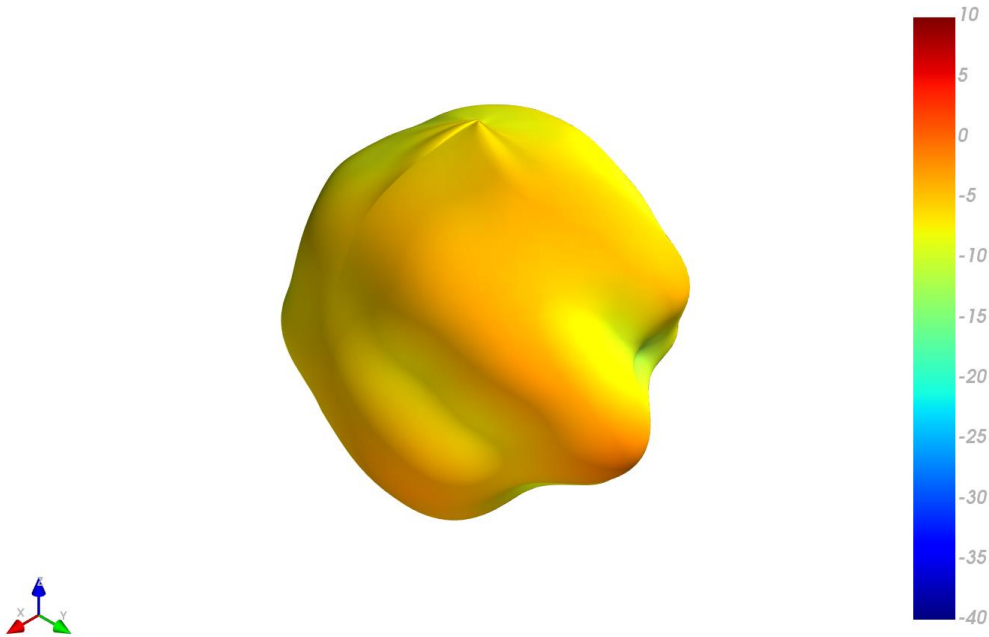


XY Plane

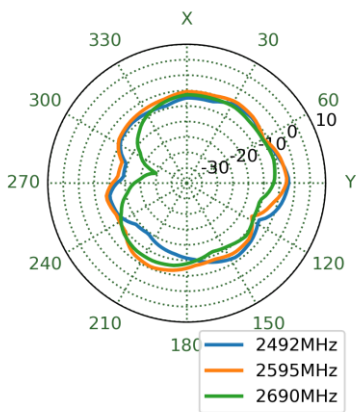


XZ Plane

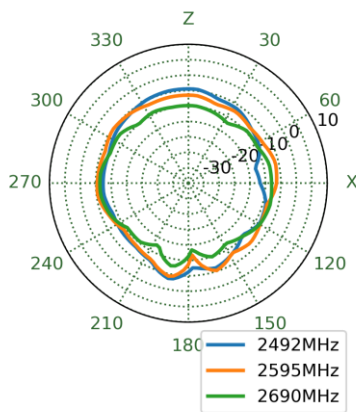


YZ Plane

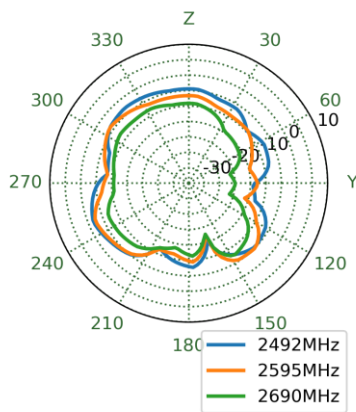


3550MHz

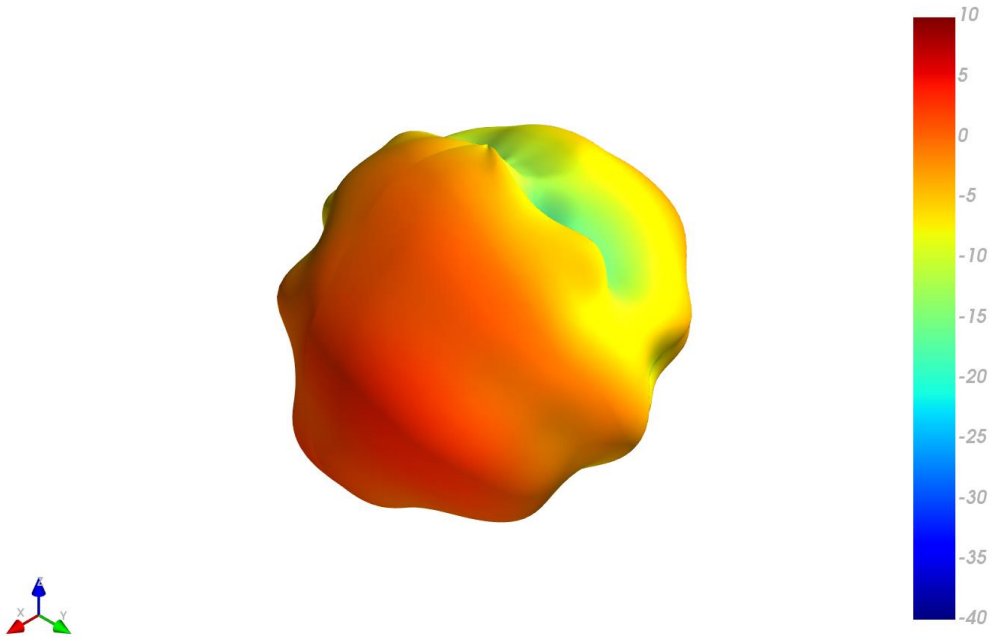


XY Plane

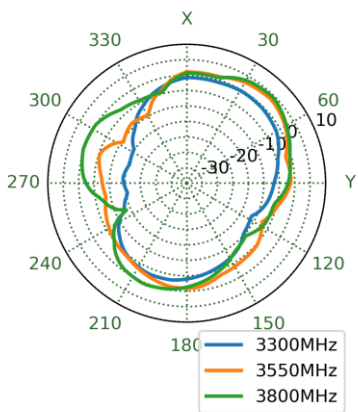

XZ Plane

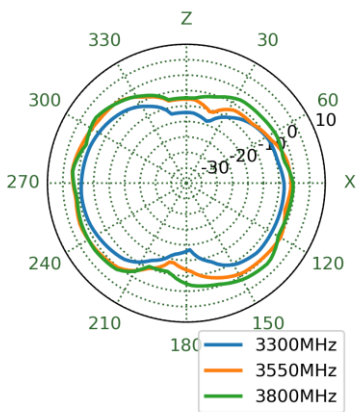


YZ Plane

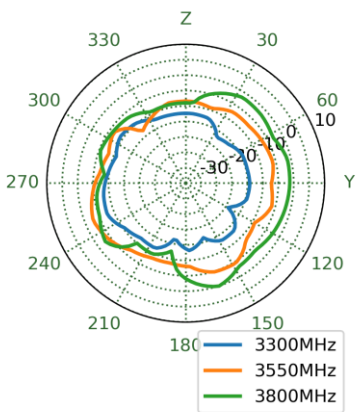


6. Mechanical Drawing (Units: mm)

6	5	4	3	2	1																																																												
ISO NO: EDW-13-8-xxxx		<Release>																																																															
<p style="text-align: center;">Top View</p> <p style="text-align: center;">Bottom Thread View</p>		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>REV</th> <th>ZONE</th> <th>DESCRIPTION</th> <th>ENG</th> <th>APPROVED</th> <th>ISSUED DATE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ALL</td> <td>Initial Design</td> <td>Gabriel</td> <td>Joanna</td> <td>2013/01/16</td> </tr> <tr> <td>2</td> <td>F2.F3</td> <td>Revised the part number.</td> <td>Gabriel</td> <td>Joanna</td> <td>2013/01/23</td> </tr> <tr> <td>3</td> <td>ALL</td> <td>Changed the sharp of label</td> <td>Gabriel</td> <td>Wayne</td> <td>2013/12/12</td> </tr> <tr> <td>4</td> <td>ALL</td> <td>Amend Nut And Material</td> <td>Joason</td> <td>Wayne</td> <td>2014/04/02</td> </tr> <tr> <td>5</td> <td>ALL</td> <td>Change Label to Print Heat Shrink Tube. Modify Tolerances and BOM. (ECR-18-8-009)</td> <td>Rachel</td> <td>Paul</td> <td>2018/08/08</td> </tr> </tbody> </table>		REV	ZONE	DESCRIPTION	ENG	APPROVED	ISSUED DATE	1	ALL	Initial Design	Gabriel	Joanna	2013/01/16	2	F2.F3	Revised the part number.	Gabriel	Joanna	2013/01/23	3	ALL	Changed the sharp of label	Gabriel	Wayne	2013/12/12	4	ALL	Amend Nut And Material	Joason	Wayne	2014/04/02	5	ALL	Change Label to Print Heat Shrink Tube. Modify Tolerances and BOM. (ECR-18-8-009)	Rachel	Paul	2018/08/08																										
		REV	ZONE	DESCRIPTION	ENG	APPROVED	ISSUED DATE																																																										
		1	ALL	Initial Design	Gabriel	Joanna	2013/01/16																																																										
		2	F2.F3	Revised the part number.	Gabriel	Joanna	2013/01/23																																																										
		3	ALL	Changed the sharp of label	Gabriel	Wayne	2013/12/12																																																										
		4	ALL	Amend Nut And Material	Joason	Wayne	2014/04/02																																																										
5	ALL	Change Label to Print Heat Shrink Tube. Modify Tolerances and BOM. (ECR-18-8-009)	Rachel	Paul	2018/08/08																																																												
<p style="text-align: center;">Front View</p> <p style="text-align: center;">Side View</p>																																																																	
<p style="text-align: center;">Notes</p> <p>1. Part Number: MA.111.C.L301111.B305111</p>		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Name</th> <th>P/N</th> <th>Material</th> <th>Finish</th> <th>QTY</th> </tr> </thead> <tbody> <tr> <td>1 Housing_Top</td> <td>000113F000020A</td> <td>PC</td> <td>Black</td> <td>1</td> </tr> <tr> <td>2 Housing_Bottom</td> <td>000113F010020A</td> <td>PC</td> <td>Black</td> <td>1</td> </tr> <tr> <td>3 M24 Nut</td> <td>000112A020020A</td> <td>ABS</td> <td>Black</td> <td>1</td> </tr> <tr> <td>4 Double-Sided Adhesive With Foam(Black Foam)</td> <td>001013A000020A</td> <td>CR4305+3M9448</td> <td>White Liner</td> <td>1</td> </tr> <tr> <td>5 Silicone Rubber</td> <td>000712A000020A</td> <td>Silicone Rubber</td> <td>Black</td> <td>1</td> </tr> <tr> <td>6 Heat Shrink Tube (Cellular)</td> <td>001316L100000A</td> <td>PE</td> <td>Blue Tube/White Text</td> <td>1</td> </tr> <tr> <td>7 Heat Shrink Tube (GNSS)</td> <td>001316C000000A</td> <td>PE</td> <td>Blue Tube/White Text</td> <td>1</td> </tr> <tr> <td>8 RG174 Coaxial Cable</td> <td>301315C000000A</td> <td>PVC</td> <td>Black</td> <td>1</td> </tr> <tr> <td>9 CFD200 Coaxial Cable</td> <td>301415C010000A</td> <td>PE</td> <td>Black</td> <td>1</td> </tr> <tr> <td>10 SMA(M) ST</td> <td>200212I000012A</td> <td>Brass</td> <td>Au Plated</td> <td>1</td> </tr> <tr> <td>11 SMA(M) ST</td> <td>200216D02009BA</td> <td>Brass</td> <td>Au Plated</td> <td>1</td> </tr> </tbody> </table>		Name	P/N	Material	Finish	QTY	1 Housing_Top	000113F000020A	PC	Black	1	2 Housing_Bottom	000113F010020A	PC	Black	1	3 M24 Nut	000112A020020A	ABS	Black	1	4 Double-Sided Adhesive With Foam(Black Foam)	001013A000020A	CR4305+3M9448	White Liner	1	5 Silicone Rubber	000712A000020A	Silicone Rubber	Black	1	6 Heat Shrink Tube (Cellular)	001316L100000A	PE	Blue Tube/White Text	1	7 Heat Shrink Tube (GNSS)	001316C000000A	PE	Blue Tube/White Text	1	8 RG174 Coaxial Cable	301315C000000A	PVC	Black	1	9 CFD200 Coaxial Cable	301415C010000A	PE	Black	1	10 SMA(M) ST	200212I000012A	Brass	Au Plated	1	11 SMA(M) ST	200216D02009BA	Brass	Au Plated	1		
		Name	P/N	Material	Finish	QTY																																																											
1 Housing_Top	000113F000020A	PC	Black	1																																																													
2 Housing_Bottom	000113F010020A	PC	Black	1																																																													
3 M24 Nut	000112A020020A	ABS	Black	1																																																													
4 Double-Sided Adhesive With Foam(Black Foam)	001013A000020A	CR4305+3M9448	White Liner	1																																																													
5 Silicone Rubber	000712A000020A	Silicone Rubber	Black	1																																																													
6 Heat Shrink Tube (Cellular)	001316L100000A	PE	Blue Tube/White Text	1																																																													
7 Heat Shrink Tube (GNSS)	001316C000000A	PE	Blue Tube/White Text	1																																																													
8 RG174 Coaxial Cable	301315C000000A	PVC	Black	1																																																													
9 CFD200 Coaxial Cable	301415C010000A	PE	Black	1																																																													
10 SMA(M) ST	200212I000012A	Brass	Au Plated	1																																																													
11 SMA(M) ST	200216D02009BA	Brass	Au Plated	1																																																													
<p>UNLESS OTHERWISE SPECIFIED TOLERANCES ON:</p> <p>XX.± 0.5 .XX± 0.1</p> <p>X.± 0.3 .XXX± 0.05</p> <p>APPROVED BY: Joanna</p> <p>CHECKED BY: Wayne</p> <p>DRAWN BY: Gabriel</p>		<p>DATE: 2018/08/08</p> <p>UNIT: mm</p> <p>THIRD ANGLE PROJECTION</p> <p>MAT'L:</p> <p>FINISH:</p> <p>SCALE: 1/1</p>		<p style="text-align: center;">taoglas</p> <p style="text-align: center;">antenna solutions</p> <p style="text-align: center;">TW Design Centre</p> <p style="text-align: center;">This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.</p>																																																													
						<p>TITLE. : Ultima Screwmount</p> <p>GPS/GLONASS-3M RG-174 SMA(M)</p> <p>Cellular-3M CFD-200 SMA(M)</p> <p>PART NO. : MA111.C.LB.001</p>																																																											
6	5	4	3	2	1																																																												

7. Installation

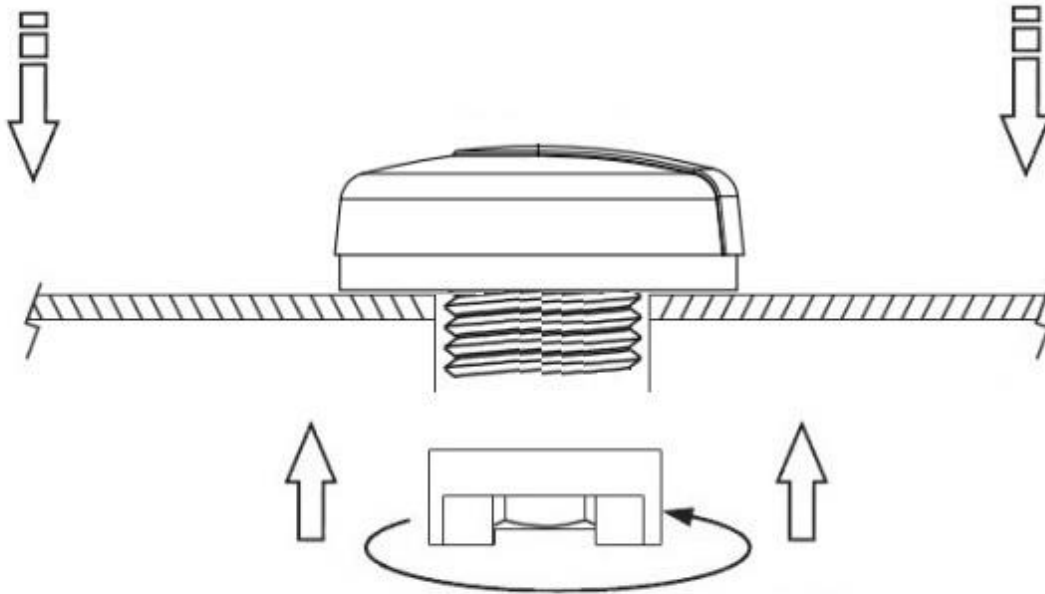


Recommended torque for Mounting is 3.92N·m
 Maximum torque for Mounting is 4.9N·m

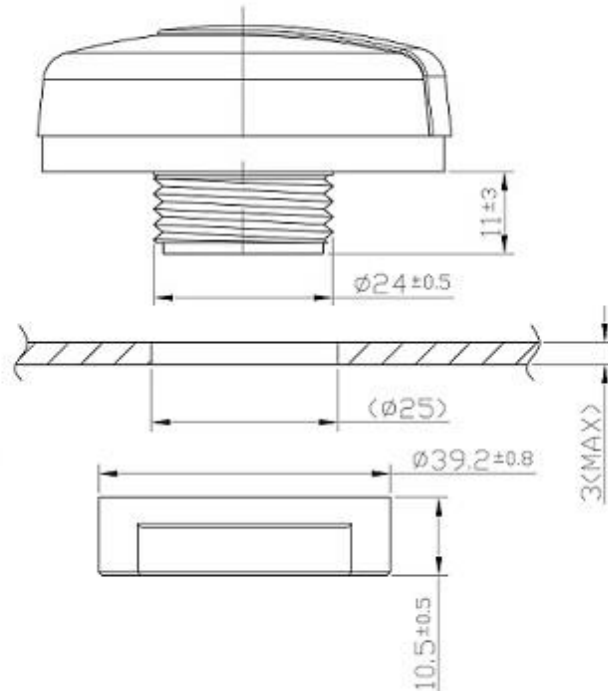


8. Packaging

1pcs MA111.C.LB.001 per PE Bag
 Dimensions - $\varnothing 330 \times 28.4$
 Weight - 0.21Kg


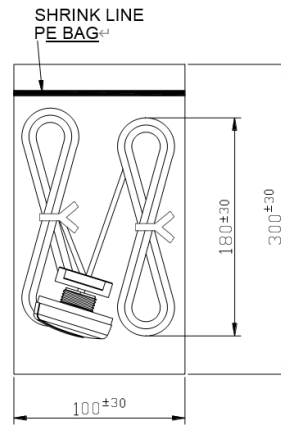


40pcs MA111.C.LB.001 per carton
 Dimensions - 320*250*230mm
 Weight - 8.7Kg


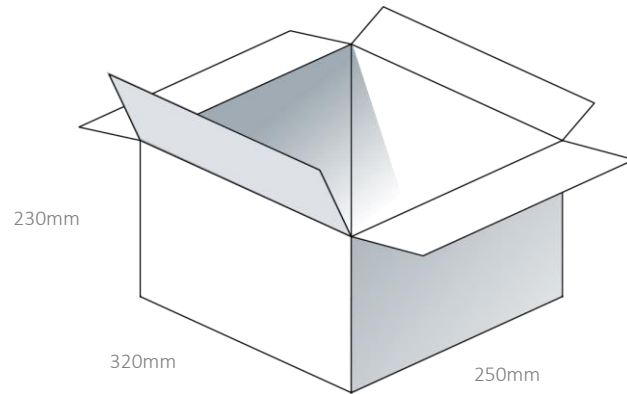


9. Application Note



9.1 Efficiency – Cellular

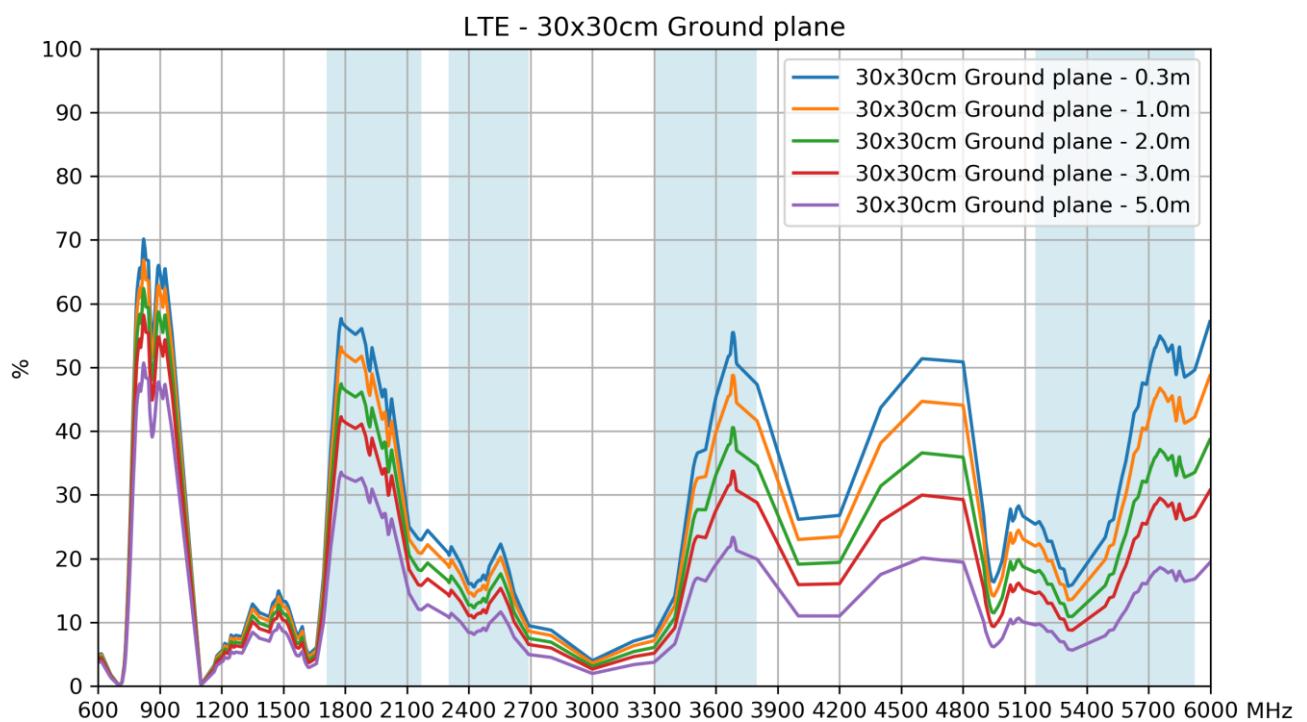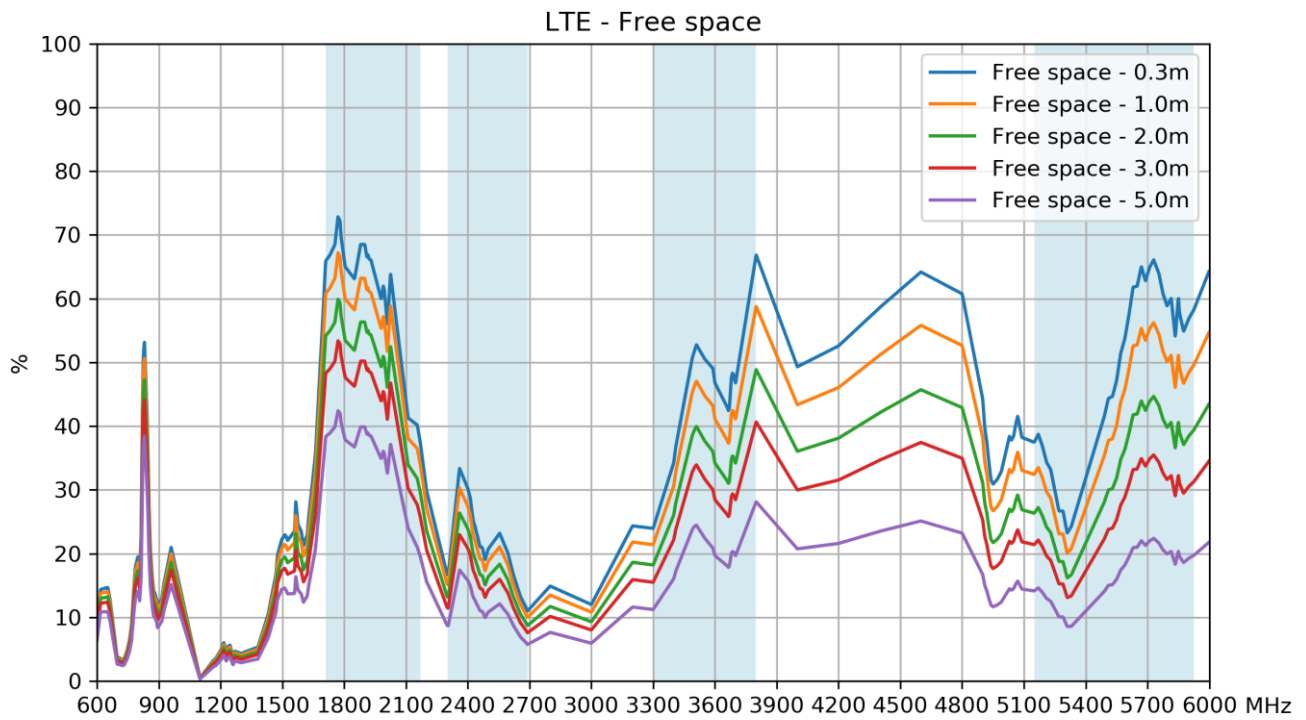

9.2 Average Gain – Cellular

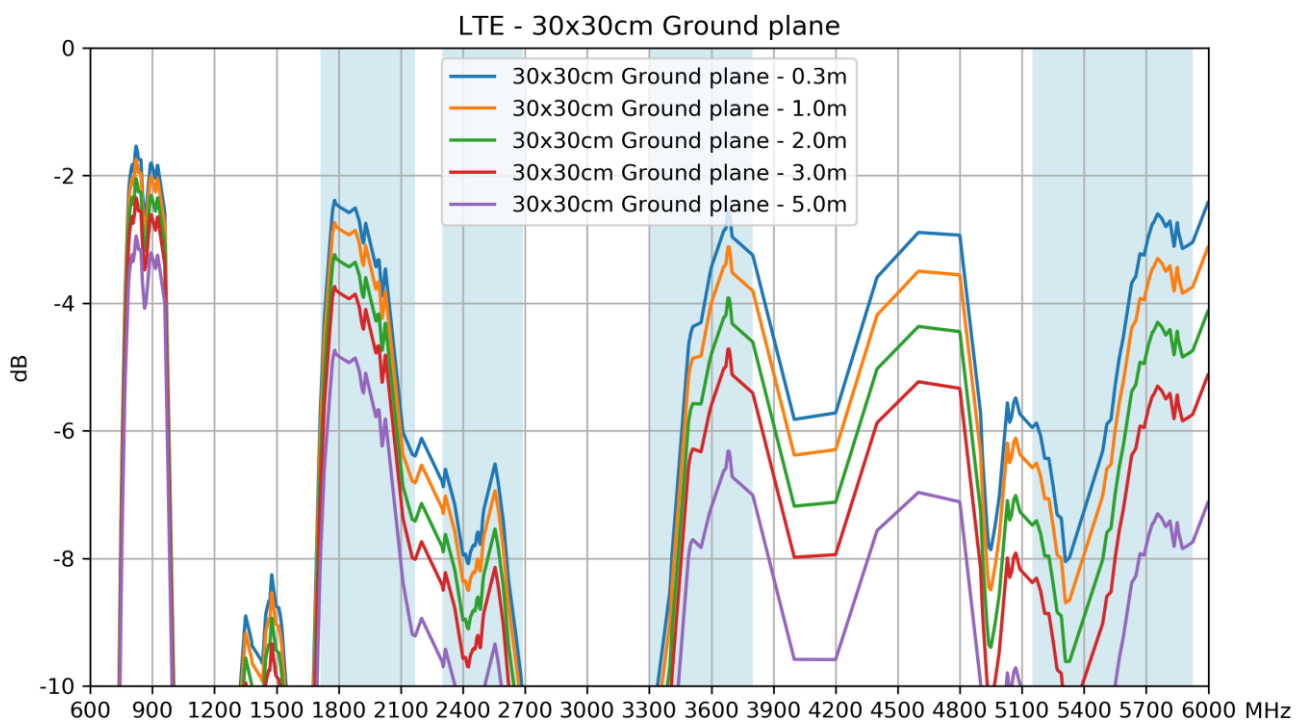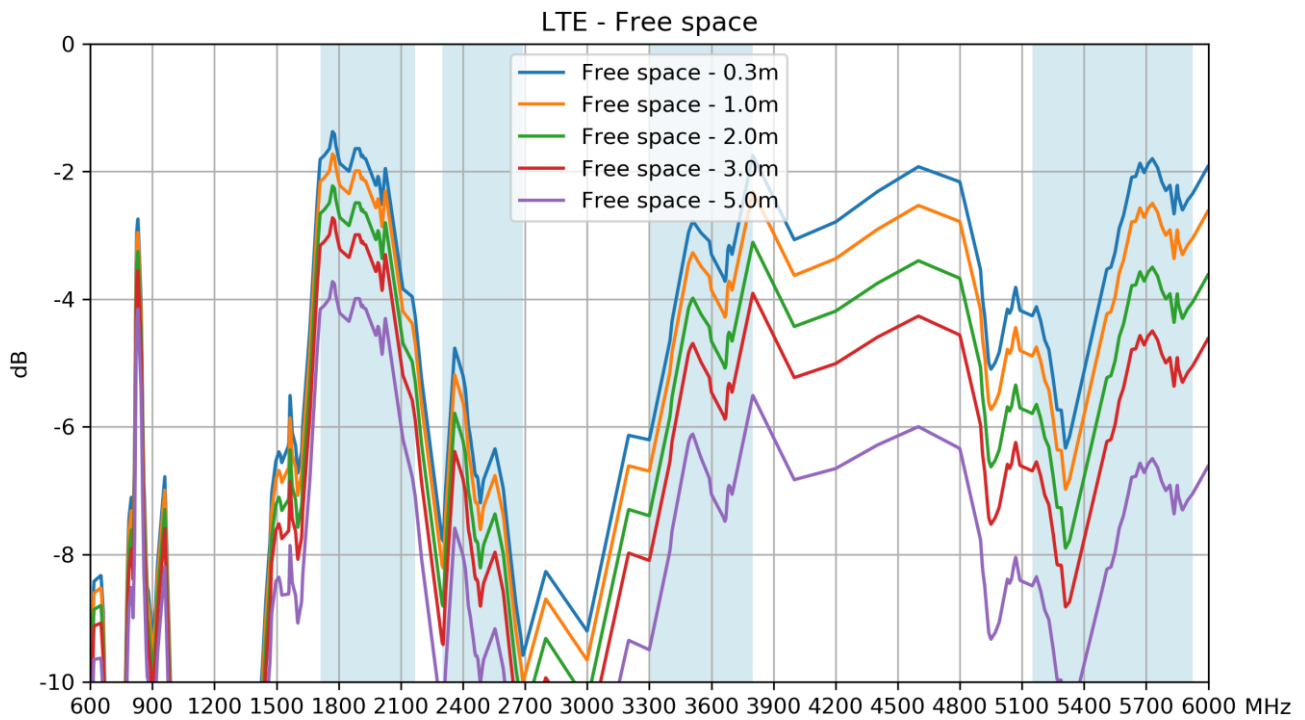

9.3 Peak Gain – Cellular

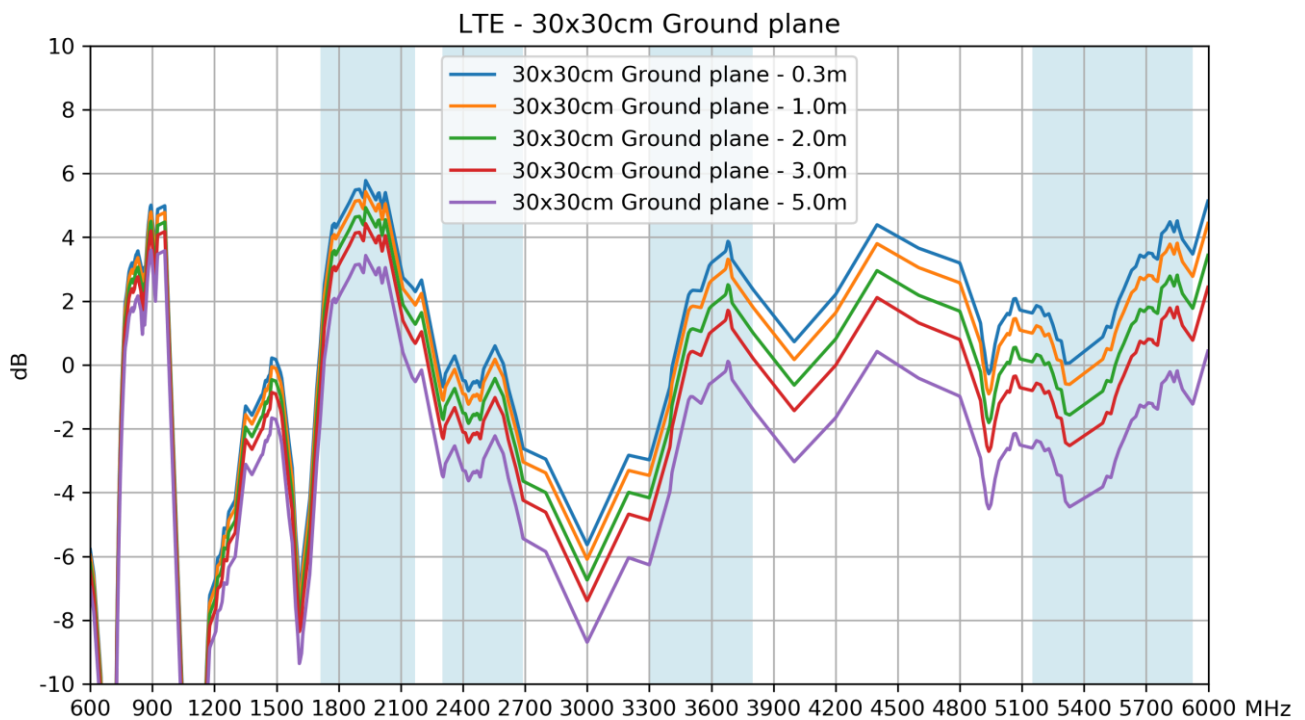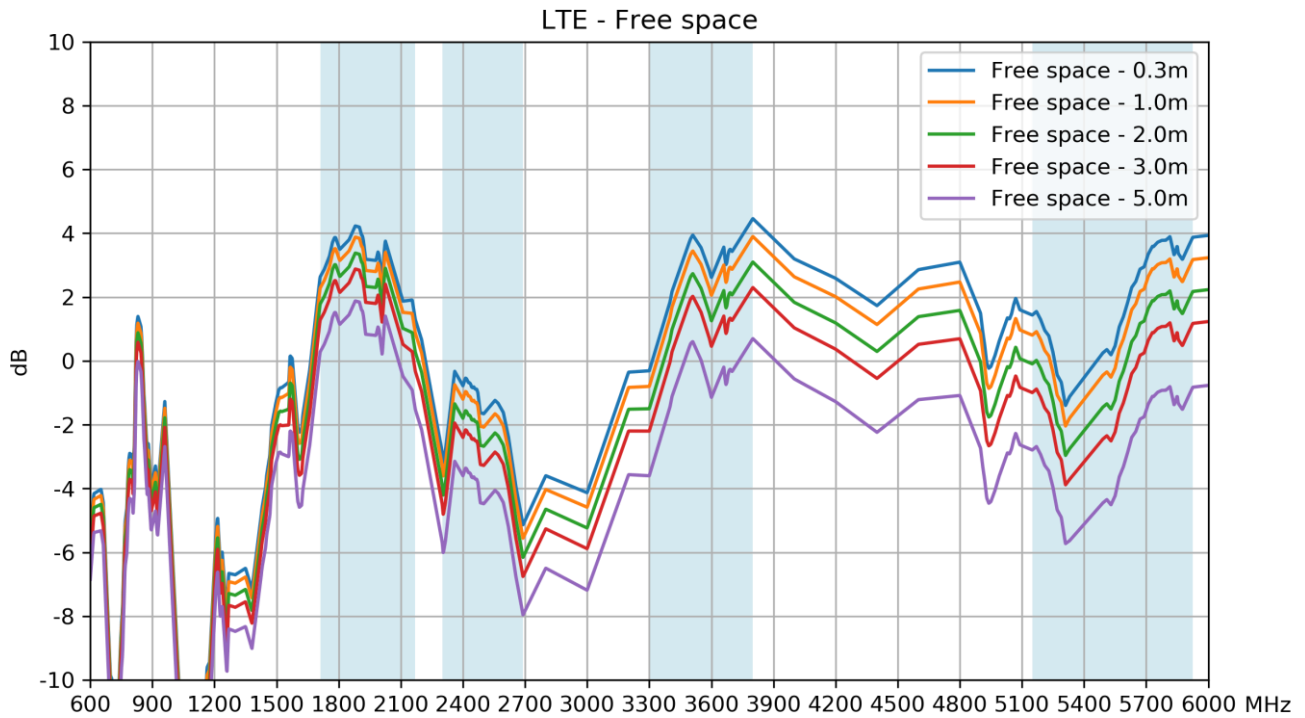

Changelog for the datasheet

SPE-13-8-040 – MA111.C.LB.001

Revision: C (Current Version)

Date:	2020-02-25
Changes:	Updated to show ground plane data
Changes Made by:	Jack Conroy

Previous Revisions

Revision: B

Date:	2019-01-22
Changes:	New Table Added
Changes Made by:	Jack Conroy

Revision: A (Original First Release)

Date:	2013-05-17
Notes:	
Author:	Aine Doyle



TAOGLAS®

www.taoglas.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Taoglas](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [Y4503](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [C37](#) [MAF94051](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#)