


Shapes and Dimensions/Recommended PC Board Pattern

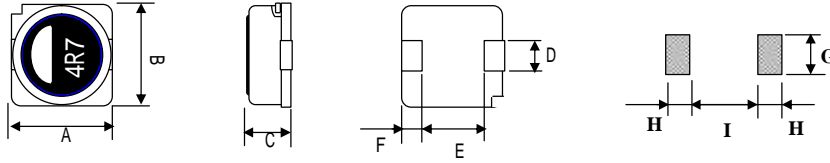

- A : 7.0±0.2 mm
- B : 7.0±0.2 mm
- C : 2.8±0.2 mm
- D : 2.0±0.1 mm
- E : 4.9 Typ. mm
- F : 0.9 Typ. mm
- G : (2.2) mm
- H : (1.5) mm
- I : (4.9) mm

Features:


- 1) Low Profile : 2.8±0.2 mm Height.
- 2) Generic use for DC-DC Converter.
- 3) Low Rdc and High core saturation

Applications

- 1) Note PC, LCD TV,
- 2) 20W-Class step-down converters

Typical Electrical Characteristics

Inductance Change vs. DC Superposition

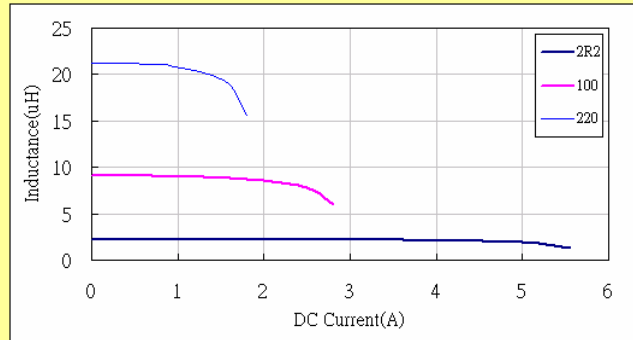

TDK Identification	Inductance (uH)	Tolerance (%)	Test Freq. (kHz)	DC Resistance (mO) ±20%	Rated DC Current	
					Idc 1 (A) Max.	Idc 2 (A) Max.
SLF7028T-1R5N5R3-T3PF	1.5	±30%	100	11.4	5.3	6.4
SLF7028T-1R8N5R3-T3PF	1.8	±30%	100	11.4	5.3	6.4
SLF7028T-2R2N4R3-T3PF	2.2	±30%	100	15.8	4.3	5.3
SLF7028T-3R3N4R0-T3PF	3.3	±30%	100	19.5	4.0	4.9
SLF7028T-3R8N3R5-T3PF	3.8	±30%	100	23.5	3.5	3.9
SLF7028T-4R7M3R0-T3PF	4.7	±20%	100	30.8	3.0	3.3
SLF7028T-5R6M2R7-T3PF	5.6	±20%	100	39.5	2.7	3.1
SLF7028T-6R8M2R5-T3PF	6.8	±20%	100	43.9	2.5	2.8
SLF7028T-8R2M2R4-T3PF	8.2	±20%	100	51.7	2.4	2.5
SLF7028T-100M2R2-T3PF	10.0	±20%	100	64.9	2.2	2.2
SLF7028T-150M1R7-T3PF	15.0	±20%	100	87.3	1.7	1.9
SLF7028T-220M1R4-T3PF	22.0	±20%	100	130.0	1.4	1.5

* Rate DC current : 1) Idc1 is based on inductance change 20% decrease from the initial value.

2) Idc2 is based on temperature rise of 40

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [tdk](#) manufacturer:

Other Similar products are found below :

[VLF5012ST-1R0N2R5](#) [R14493](#) [SWS1000L-24/BL](#) [C3225X5R0J686M200AC](#) [VLF5014AT-150MR76](#) [VLF5014AT-6R8MR99](#) [CXA-2115](#)
[MCZ1210AH301L2T](#) [78P7200-IH/F](#) [MLP2012S1R5TT](#) [ACH3218-682-TD01](#) [ACT45B-KIT](#) [NL565050T-822J-PF](#) [C1005JB1H471K050BA](#)
[C1608CH1H151J080AA](#) [C2012JB1H105K125AB](#) [C4532NP01H154J250KA](#) [CD75-B2GA331KYGKA](#) [CLF10040T-221M](#) [CLF12555T-](#)
[220M](#) [R22095*REPAIRED](#) [MLF1005LR12K](#) [MLP2520S1R0ST](#) [MLP2520S1R5MT](#) [VLS252015T-3R3M1R0](#) [VLS4012T-150MR65](#) [ZCAT-](#)
[KIT](#) [MPZ2012-KIT](#) [NLV32T-R27J-EFD](#) [CGA3EANP02A682J080AC](#) [CKCM25C0G2A101K060AK](#) [CLF10040T-4R7N](#) [WTM505090-](#)
[10K2-5V-G1](#) [VLS252010HBX-R24M-1](#) [CGJ2B2X7R1C222K](#) [CGA9M1X7T2J334K](#) [CGA8P3X7T2E105M/SOFT](#) [CGA6J4C0G2J392J](#)
[CGA6M3X7R2E154K](#) [CGA3E3C0G2E181J](#) [CGA2B2C0G1H331J](#) [C-WPTX01-E6-KIT](#) [CEU-AC01-E6-KIT](#) [CERB3UX5R0G105M](#)
[RLF12545T-100M5R1-PF](#) [PFE500F28/T](#) [CCT406393-600-36-02](#) [PFC3819QM-181K09B-00](#) [VLF3010AT-100MR49](#) [MMZ0603D330C](#)