


Model Selector								
Model		Voltage (V)	Adjust Range (V)	Max Current (A)	Max Power (W)	Load Reg (mV)	Line Reg (mV)	Ripple Noise (mV)
CUT75-522	V 1	5V	5.0 - 5.25	8	40	100	50	120
	V2	+12V	Fixed	3	36	600	240	150
	V3	-12V	Fixed	1		600	240	150
CUT75-522	V1	5V	5.0 - 5.25	8	40	100	50	120
	V2	24V	Fixed	1	24	750	300	150
	(Leave common terminal unconnected)							
CUT75-5FF	V1	5V	5.0 - 5.25	8	40	100	50	120
	V2	+15V	Fixed	2.5	37.5	750	300	150
	V3	-15V	Fixed	1		750	300	150
CUT75-5FF	V1	5V	5.0 - 5.25	8	40	100	50	120
	V2	30V	Fixed	1	30	750	300	150
	(Leave common terminal unconnected)							

Note: CUT75 can be configured as a dual or triple output.

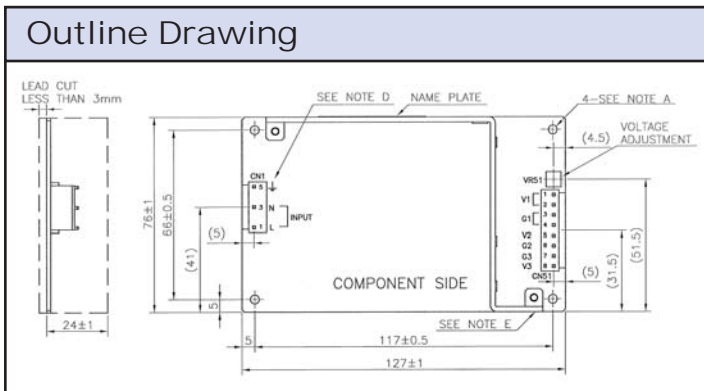

Similar Models	
SC40-60	3x5" 40W to 60W 1 to 3 outputs
ZPT	2x4" 40W 1 to 3 outputs
NV175	3x5" 175W, 1 to 4 outputs
ZMS100	2x4" 100W single output

For additional information, please visit <https://product.tdk.com/en/power/>



Options	
Suffix	Description
Blank	Open frame with JST connectors
/A	Cover with JST connectors
/B	Baseplate with JST connectors
/T	Open frame with screw connections
/TA	Cover with screw connections
/TB	Baseplate with screw connections

Preferred Model

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-OUTA1-48](#)
[LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#) [TVQF-1219-](#)
[18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-0028G](#) [VI-](#)
[LUL-EU](#) [EP3000AC48INZ](#) [VP-C2104853](#)