


RTMN SERIES

High Attenuation Three-Phase External Noise Prevention Filter (Thin Type for Immunity)

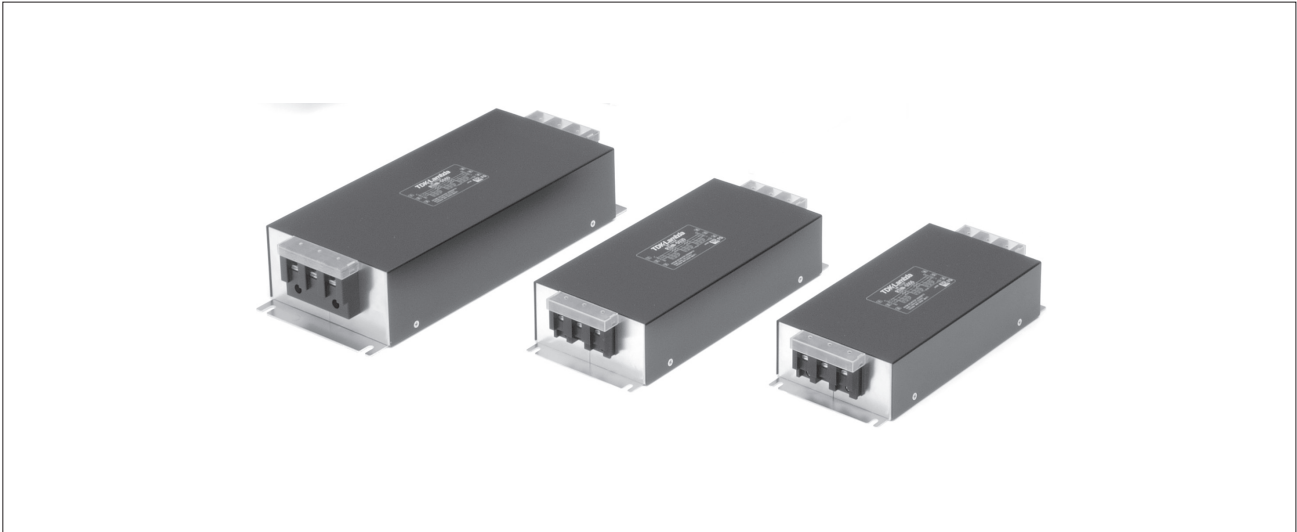


FEATURES

- Self-tightening screws and an open/close type cover make wiring work easier.
- Best for high-voltage pulse noise prevention.
- L2 high attenuation; Prevents external noise.

SAFETY STANDARDS


UL1283 UL File No. E62388
 EN60939-1/-2 (ENEC14) Licence Ref. No. SE/07115-4

PRODUCT IDENTIFICATION

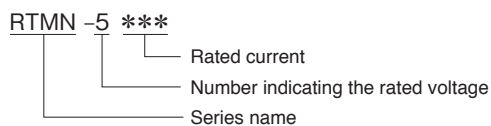

CONFORMITY TO RoHS Directive


CIRCUIT DIAGRAM

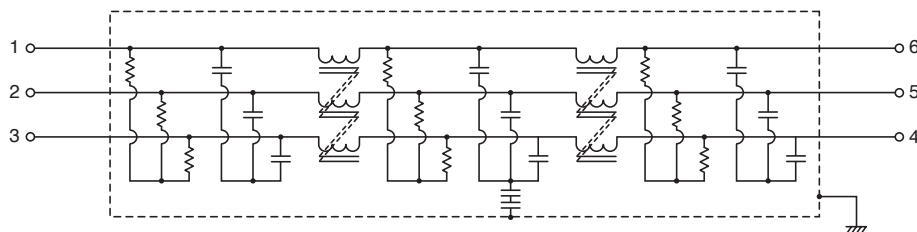


ELECTRICAL CHARACTERISTICS

Part No.	Rated voltage (AC/DC)	Rated current (AC/DC)	Withstand voltage	Insulation resistance	Leakage current	Operating temperature range	With derating over	DC resistance (mΩ)	Attenuation frequency range (MHz)		Weight (kg)
									Common mode	Differential mode	
									at 25dB	at 25dB	
RTMN-5006	500V	6A	AC.2500V 60s [Between line to ground]	100MΩ min. [DC.500V/ 1min]	2.5mA max. [250V/60Hz]	-25 to +85°C	50°C	290 max.	0.1 to 20	0.1 to 30	0.67
RTMN-5010		10A						120 max.	0.1 to 20	0.2 to 30	0.70
RTMN-5020		20A						50 max.	0.2 to 20	0.2 to 30	1.00
RTMN-5030		30A						26 max.	0.2 to 20	0.3 to 30	1.00
RTMN-5040		40A						20 max.	0.2 to 20	0.1 to 30	2.05
RTMN-5050		50A						14 max.	0.3 to 20	0.2 to 30	2.05
RTMN-5060		60A						10 max.	0.3 to 20	0.3 to 30	2.05

DERATING GRAPH

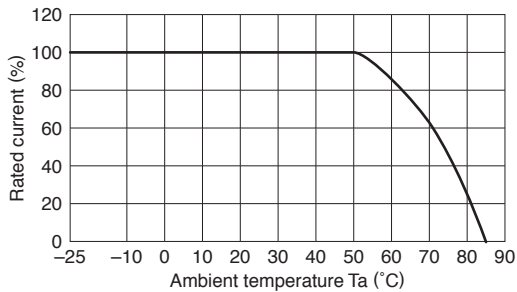

MECHANICAL

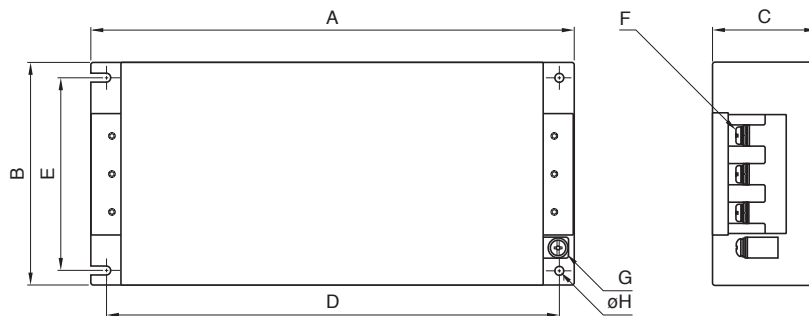


Dimensions in mm


Part No.	A	B	C	D	E	F	G	φH	Recommended clamping torque
RTMN-5006	210	95	50	195	78	M4	M4	4.5	M4 : 1.27N · m M5 : 2.5N · m
RTMN-5010									
RTMN-5020	240	105	55	225	85	M4	M4	4.5	
RTMN-5030									
RTMN-5040									
RTMN-5050	300	128	68	280	102	M5	M4	5.5	
RTMN-5060									

ATTENUATION vs. FREQUENCY CHARACTERISTICS


RTMN-5006

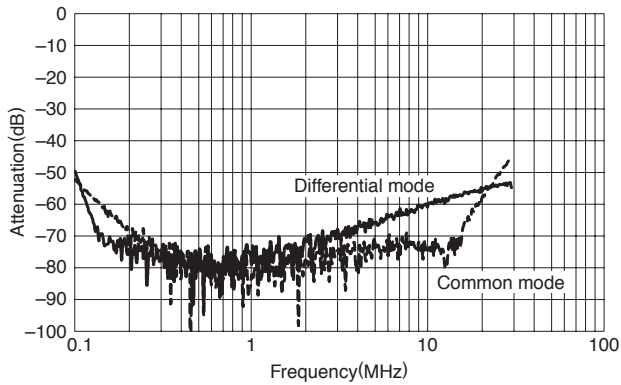


RTMN-5010

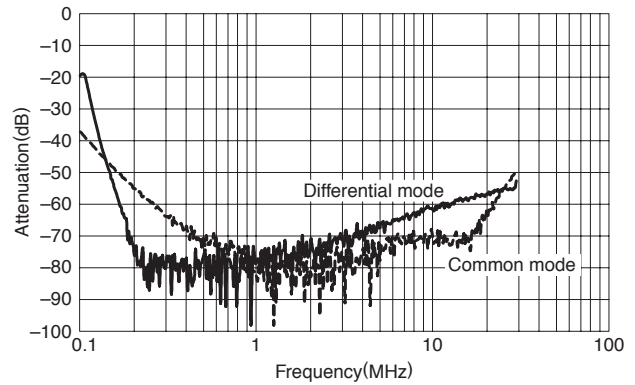


RTMN-5020

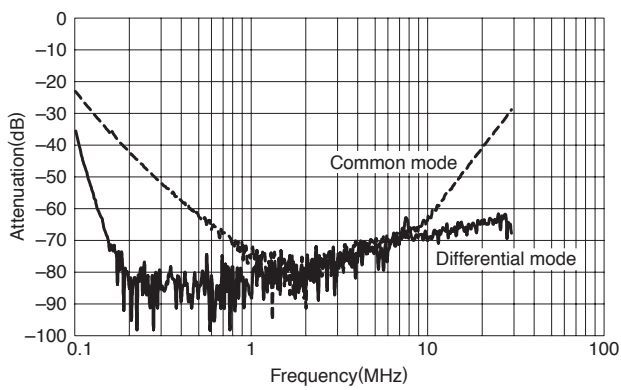


RTMN-5030

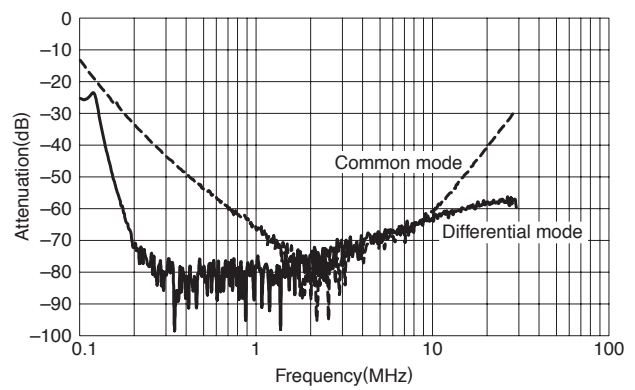


RTMN-5040

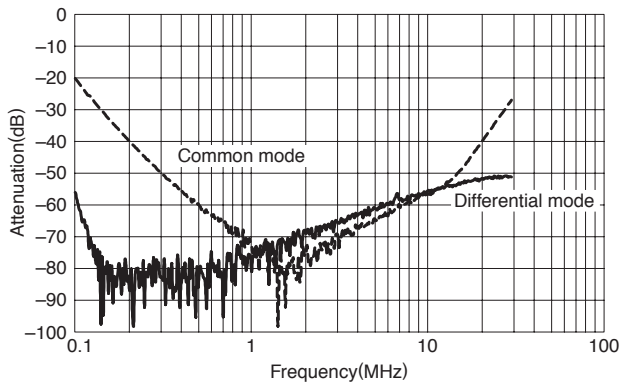

RTMN-5050

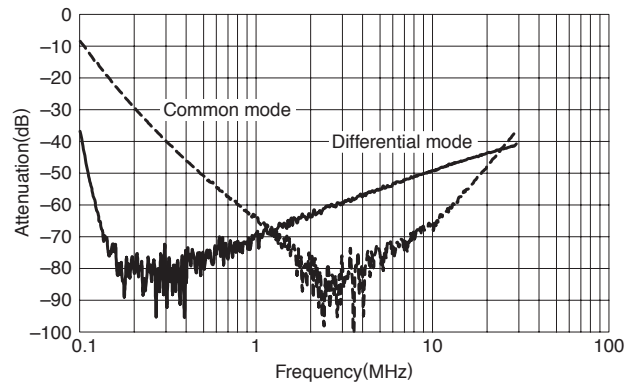


RTMN-5060

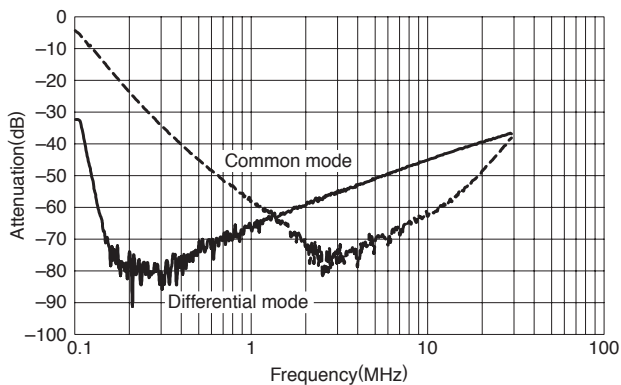


PULSE ATTENUATION CHARACTERISTICS


RTMN-5006

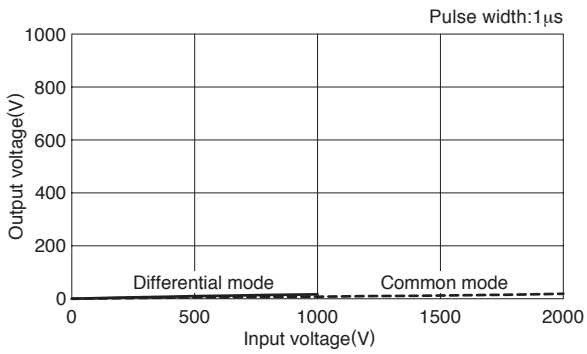


RTMN-5010

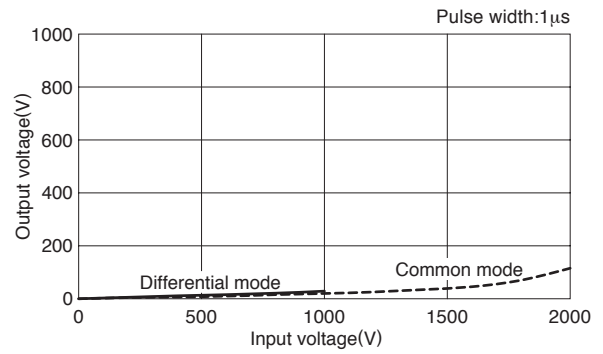


RTMN-5020

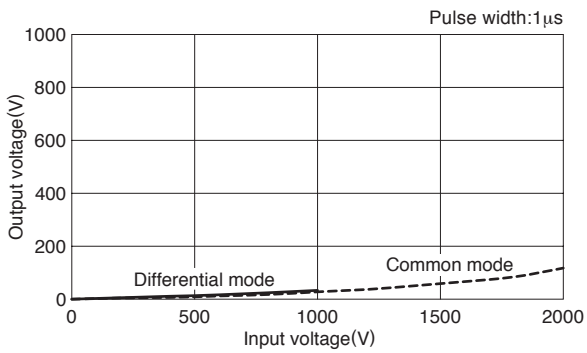


RTMN-5030

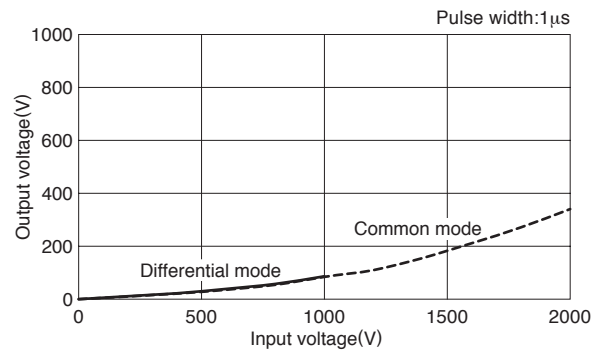


RTMN-5040

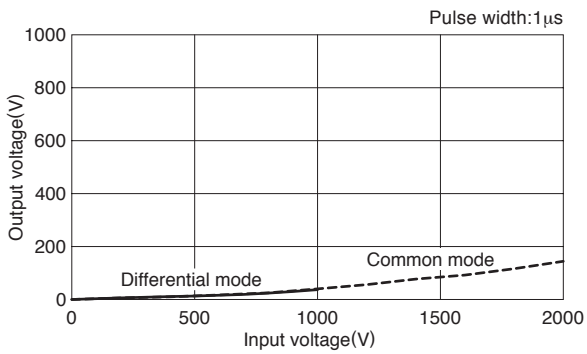

RTMN-5050

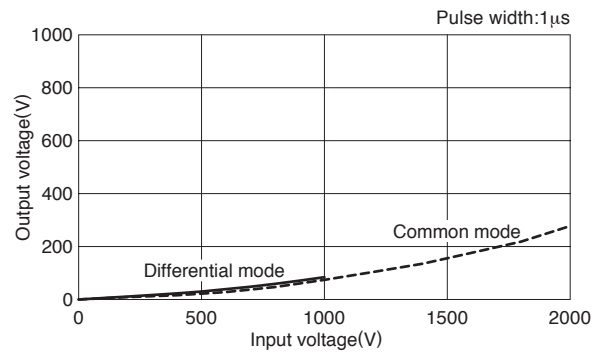

RTMN-5060

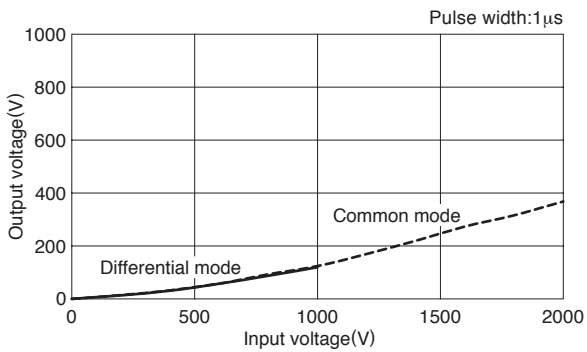

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Line Filters](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[6609019-3](#) [6609026-5](#) [6609030-6](#) [6609973-2](#) [D30A](#) [7-1609090-5](#) [F2810](#) [F4456A](#) [F7382Z](#) [F7863Z](#) [FAHAV3100ZC000](#) [806276](#) [FN2020B-1-06](#) [FN2080B-10-06](#) [FN2410H-32-33](#) [FP144](#) [FS4153-20-06](#) [FS4353-500-99](#) [12-MMB-030-11-D](#) [DB4-393](#) [15811T200](#) [20B1](#) [LC630](#) [2B1](#) [1609080-2](#) [1609993-8](#) [1-6609070-1](#) [F1100AA02](#) [F1150CC10](#) [F1500CA10](#) [F1500CA15](#) [F4041Z](#) [F7585E](#) [1B1](#) [FN2070A-16-06](#) [FN2090A-20-06](#) [FN2090B-12-06](#) [FN2090Z-1-06](#) [FN2410H-25-33](#) [FN2410H-60-34](#) [FN2410H-8-44](#) [FN2412H-8-44](#) [FN323B-6-01](#) [FN3258H-130-35](#) [FN610R-3-06](#) [20EHQ7](#) [20EHZ7](#) [20K1](#) [30B6](#) [3K1](#)