


### General Features

- 20V, 2.8A,  $R_{DS(ON)} = 83m\Omega$  (typ) @ $V_{GS} = 4.5V$ .
- $R_{DS(ON)} = 120m\Omega$  (typ) @ $V_{GS} = 2.5V$ .
- Lead free product is acquired.
- Rugged and reliable.
- SOT-23 package.

### Application


- Battery protection
- Load switch
- Power management

### Package and Pin Configuration



MARKING =A2SHB

### Circuit diagram

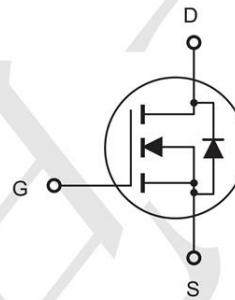


### Absolute Maximum Ratings ( $T_A=25^\circ C$ unless otherwise specified)

Characteristic	Symbol	Max	Unit
Drain-Source Voltage	$BV_{DSS}$	20	V
Gate- Source Voltage	$V_{GS}$	$\pm 8$	V
Drain Current (continuous)	$I_D$	2.8	A
Drain Current (pulsed)	$I_{DM}$	10	A
Total Device Dissipation $T_A=25^\circ C$	$P_D$	900	mW
Junction	$T_J$	150	$^\circ C$
Storage Temperature	$T_{stg}$	-55to+150	$^\circ C$


**Electrical Characteristics** (TA=25°C unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage ( $I_D = 250\mu A, V_{GS} = 0V$ )	$BV_{DSS}$	20	—	—	V
Gate Threshold Voltage ( $I_D = 250\mu A, V_{GS} = V_{DS}$ )	$V_{GS(th)}$	0.4	—	1.5	V
Drain-Source On Voltage ( $I_D = 50mA, V_{GS} = 5V$ ) ( $I_D = 500mA, V_{GS} = 10V$ )	$V_{DS(ON)}$	—	—	0.375 3.75	V
Diode Forward Voltage Drop ( $I_S = 0.75A, V_{GS} = 0V$ )	$V_{SD}$	—	—	1.2	V
Zero Gate Voltage Drain Current ( $V_{GS} = 0V, V_{DS} = 16V$ ) ( $V_{GS} = 0V, V_{DS} = 16V, T_A = 55^\circ C$ )	$I_{DSS}$	—	—	1 10	$\mu A$
Gate Body Leakage ( $V_{GS} = \pm 8V, V_{DS} = 0V$ )	$I_{GSS}$	—	—	$\pm 100$	nA
Static Drain-Source On-State Resistance ( $I_D = 2.8A, V_{GS} = 4.5V$ ) ( $I_D = 2A, V_{GS} = 2.5V$ )	$R_{DS(ON)}$	—	—	85 120	$m\Omega$
Input Capacitance ( $V_{GS} = 0V, V_{DS} = 6V, f = 1MHz$ )	$C_{ISS}$	—	—	880	pF
Common Source Output Capacitance ( $V_{GS} = 0V, V_{DS} = 6V, f = 1MHz$ )	$C_{OSS}$	—	—	270	pF
Turn-ON Time ( $V_{DS} = 6V, I_D = 1A, R_{GEN} = 6\Omega$ )	$t_{(on)}$	—	—	20	ns
Turn-OFF Time ( $V_{DS} = 6V, I_D = 1A, R_{GEN} = 6\Omega$ )	$t_{(off)}$	—	—	65	ns

**Outline Drawing - SOT23**

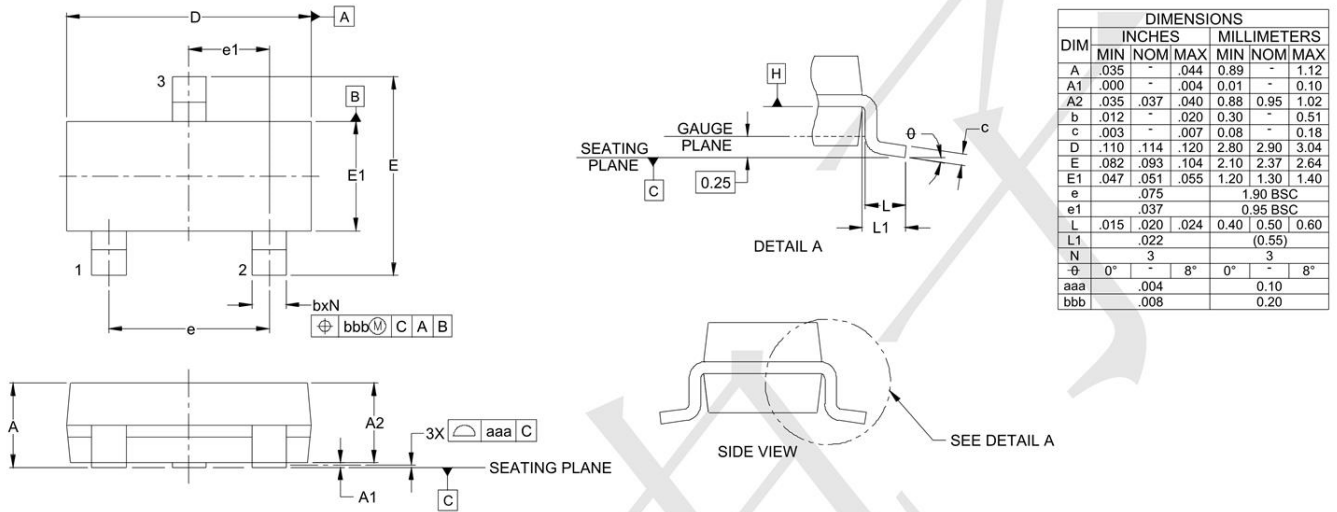

**Land Pattern - SOT23**

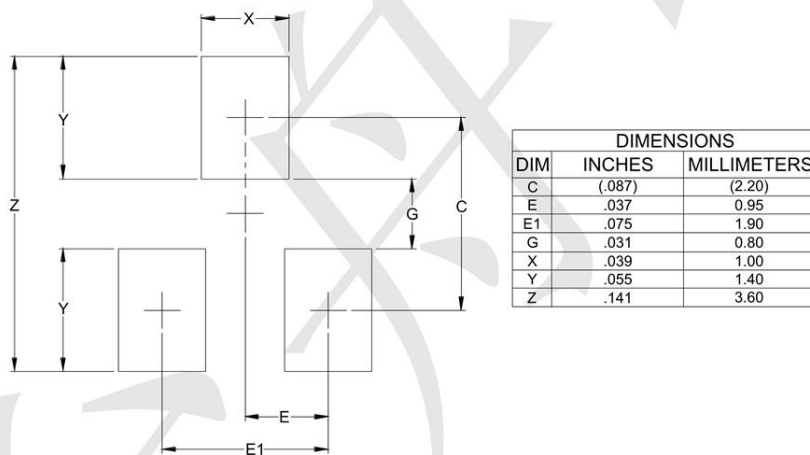

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [TECH PUBLIC](#) manufacturer:*

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [NTNS3A92PZT5G](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#)  
[AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#)  
[IPS70R2K0CEAKMA1](#) [BSF024N03LT3 G](#) [PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#)  
[EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMC2700UDMQ-7](#)  
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#)  
[DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [IPSA70R950CEAKMA1](#) [IPSA70R2K0CEAKMA1](#) [STU5N65M6](#)  
[C3M0021120D](#)