


Product Summary

- VDS=-150V,ID=0.9A
- RDS(ON)=750mΩ(Typ)@VGS=10V


Application

- Load Switch
- Active Clamp Switch

Package and Pin Configuration



Circuit diagram



Marking: D5TPM


Absolute Maximum Ratings (T_A=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	VDS	-150	V
Gate-Source Voltage	VGS	±20	
Continuous Drain Current	ID	-0.9	A
Pulsed Diode Current	IDM	-1.8	
Power Dissipation	PD	1.1	W
Thermal Resistance from Junction to Ambient (t≤10s)	RθJA	80	°C/W
Operating Junction	TJ	150	°C
Storage Temperature	TSTG	-55~+150	°C

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Drain-source breakdown voltage	V(BR)DSS	VGS = 0V, ID = -250 μ A	-150			V
Gate-source threshold voltage	VGS(th)	VDS =VGS, ID = -250 μ A	-2.0	-3.0	-4.0	V
Gate-source leakage	IGSS	VDS =0V, VGS = \pm 20V			\pm 100	nA
Zero gate voltage drain current	IDSS	VDS = -120V, VGS =0V			-1	μ A
Drain-source on-state resistancea	RDS(on)	VGS = -10V, ID = -1A		750	950	m Ω
Forward transconductancea	gfs	VDS = -10 V, ID = -0.8A		1.5		S
Diode forward voltage	VSD	IS= -1A,VGS=0V		-0.8	-1.3	V
Dynamic						
Input capacitance	Ciss	VDS = -75V,VGS =0V, f=1MHz		175		pF
Output capacitance	Coss			17		pF
Reverse transfer capacitanceb	Crss			1.8		pF
Total gate charge	Qg	VGS = 0 V to -10 V VDD = -75 V, ID = -0.8 A		2.9		nC
Gate-source charge	Qgs			0.8		nC
Gate-drain charge	Qgd			0.8		nC
Gate resistance	Rg		0.1		7.2	Ω
Switchingbtr						
Turn-on delay time	td(on)	VDS= -75V, ID= -0.8A RGEN=6.0 Ω ,VGS= -10V		6		ns
Rise time	tr			2		ns
Turn-off delay time	td(off)			8		ns
Fall time	tf			10		ns

SOT-23 Package Information

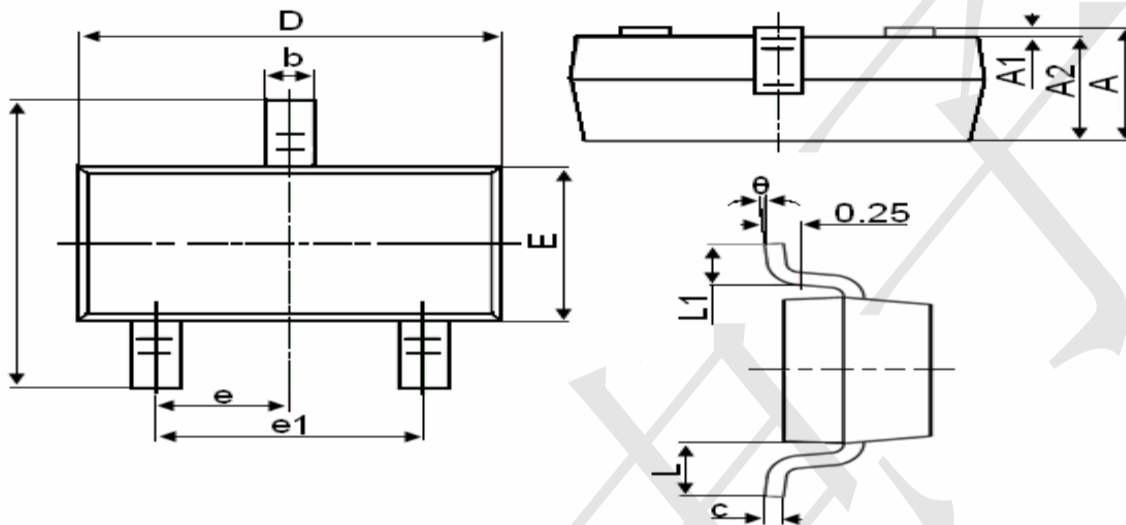

Symbol	Dimensions in Millimeters	
	MIN.	MAX.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.500
θ	0°	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [IRFY240C](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#)
[DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#)
[DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#)
[DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-](#)
[TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [NVMFS2D3P04M8LT1G](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#)