

APPROVED BY/DATE  
C. Westerb 5-26-92

REV 1

SAFETY ORGANIZATION(S)

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET,

UL RECOGNIZED  
UL 1283  
CSA CERTIFIED  
CSA 22-2, NO. 0, 0, 4, 8  
VDE APPROVED (PENDING)  
VDE 565-3

OPERATING SPECIFICATIONS:

LINE VOLTAGE/CURRENT:  
10 AMP., 120/250 VAC  
8 AMP./40°C, 250 VAC  
50-60Hz

LINE FREQUENCY:  
.25 mA @ 120V 60 Hz  
.48 mA @ 250V 50 Hz  
-10°C TO +40°C @ RATED CURRENT, I<sub>r</sub>

IN AN AMBIENT, T<sub>a</sub>, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I<sub>o</sub>, IS AS FOLLOWS:

$$I_o = I_r \sqrt{\frac{85 - T_a}{45}}$$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE:  
-40°C TO +85°C

HUMIDITY:  
21 DAYS @ 40°C 95% RH

CURRENT OVERLOAD TEST:  
6 TIMES RATED CURRENT FOR 8 SECONDS

TEST SPECIFICATIONS:

INDUCTANCE:  
.495 mH NOMINAL

CAPACITANCE: MEASURED @ 1 KHz, 0.25 VAC MAX., 25°C ±1°C)  
.003µF ±20%  
LINE TO GROUND,  
1.08µF ±20%  
DISCHARGE RESISTOR  
330KΩ

LINE TO LINE:  
6000 MΩ (MIN) AT 100 VDC

LINE/GROUND AND LINE/LINE  
INSULATION RESISTANCE  
20°C AND 50% RH



RECOMMENDED RECEIVING INSPECTION HIPOT:

LINES TO GROUND:  
2250 VDC FOR 1 MINUTE

LINE TO LINE:  
1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

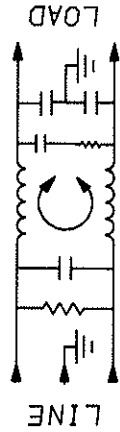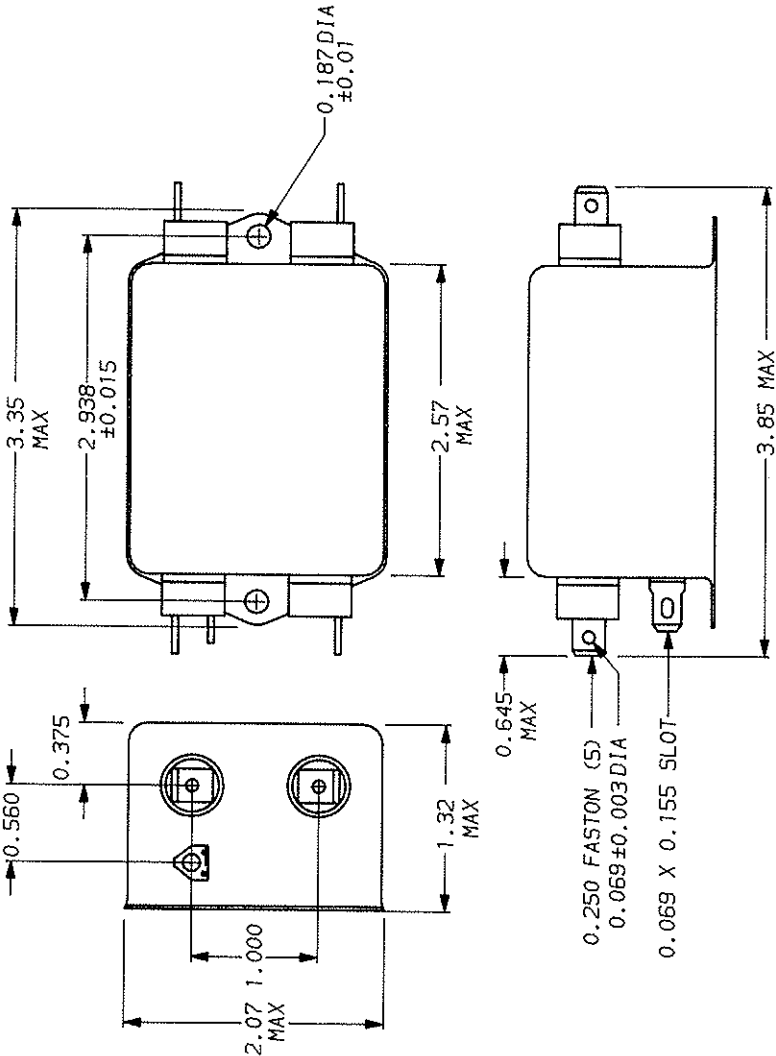

FREQUENCY MHz	50Ω - 50p (MINIMUM) INSERTION LOSS									
	.15	.5	1	2	5	10	20	30		
COMMON dB	10	20	27	33	38	40	45	46		
DIFF. dB	20	43	55	62	70	72	60	60		

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.



LIBERTYVILLE, IL 60048

POWER LINE FILTER

SCALE: NTS 11-5-90  
DATE: 11-5-90  
REV. NO. 10EDK1.01

FINISH: AS SUPPLIED

TOLERANCE EXCEPT AS NOTED  
DECIMAL: .XXX .XX .X ANGLES ±1°  
ENGLISH: ±.025  
METRIC: ±

MATERIAL: AS SUPPLIED

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Line Filters](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[6609019-3](#) [6609026-5](#) [6609030-6](#) [6609973-2](#) [D30A](#) [7-1609090-5](#) [F2810](#) [F4456A](#) [F7382Z](#) [F7863Z](#) [FAHAV3100ZC000](#) [806276](#) [FN2020B-1-06](#) [FN2080B-10-06](#) [FN2410H-32-33](#) [FN2410H-80-34](#) [FP144](#) [FS4153-20-06](#) [FS4353-500-99](#) [12-MMB-030-11-D](#) [DB4-393](#) [15811T200](#)  
[20B1](#) [LC630](#) [2B1](#) [1609080-2](#) [1609993-8](#) [1-6609070-1](#) [F1100AA02](#) [F1150CC10](#) [F1500CA10](#) [F1500CA15](#) [F4041Z](#) [F7585E](#) [1B1](#)  
[FN2070A-16-06](#) [FN2090A-20-06](#) [FN2090B-12-06](#) [FN2090Z-1-06](#) [FN2410H-25-33](#) [FN2410H-60-34](#) [FN2410H-8-44](#) [FN2412H-8-44](#)  
[FN323B-6-01](#) [FN3258H-130-35](#) [FN610R-3-06](#) [20EHQ7](#) [20EHZ7](#) [20K1](#) [30B6](#)