






THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 14JAN ,2003.
 © COPYRIGHT 2004 By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B		C	ECR-06-021030	20/09/06	AM	FWK
			C1	REVISED PER ECO-09-024606	02NOV09	KK	AEG
			C2	ECR-10-022205	01FEB11	KK	HMR

NOTES

- FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE.
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - RATING
 3.1 RATING : 3 AMPS
 3.2 OPERATING TEMPERATURE : - 40°C TO +105°C
 - ELECTRICAL SPECIFICATION
 4.1 INSULATION RESISTANCE
 5000 MΩ MINIMUM
 4.2 WITHSTAND VOLTAGE
 500V AC
 - MATERIALS
 5.1 CONTACT - BRASS, POST PLATE
 Au 0.25μm (10μinch) IN CONTACT AREA
 Sn 2 TO 3μm (80 TO 120μinch) IN SOLDER AREA.
 5.2 HOUSING - BLACK NYLON 6T UL 94V-0
- 6 NUMBER OF CONTACT POSITIONS TO BE INDICATED IN AREA SHOWN.
 XX = NUMBER OF POSITONS.
- 7 TYCO LOGO TO BE PRESENT IN AREA INDICATED.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

Recommended P.C.Board Hole Layout

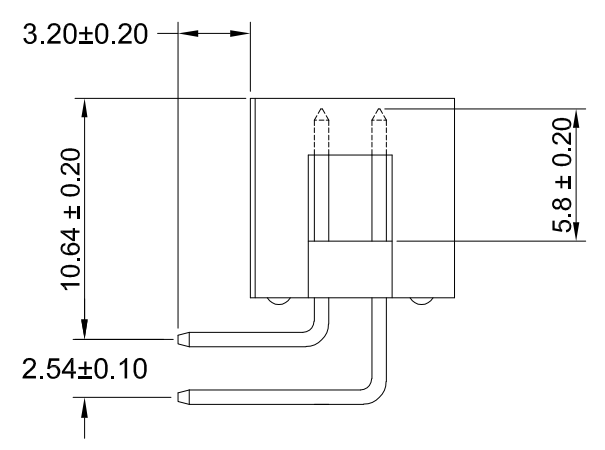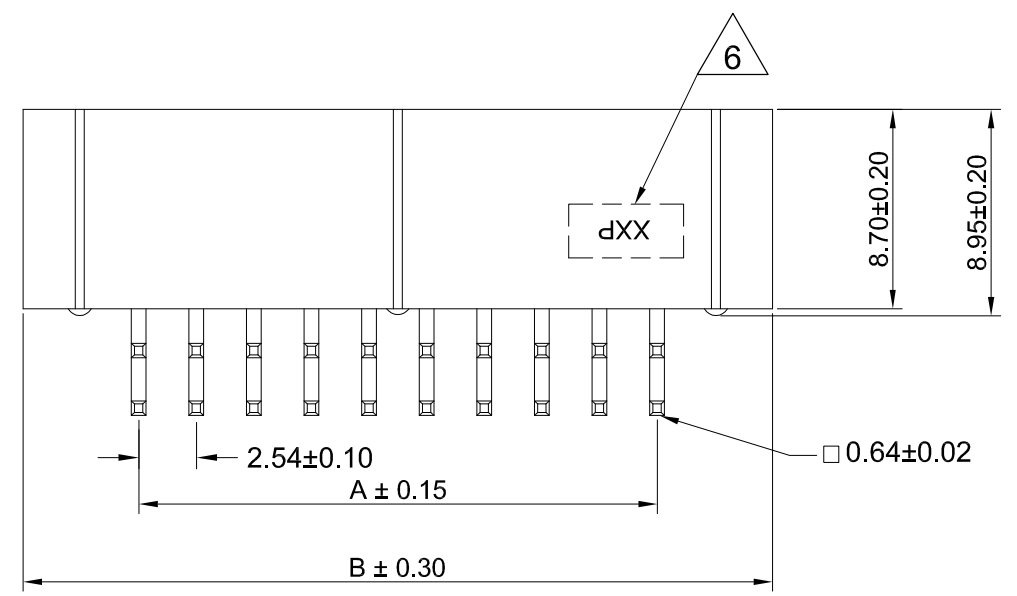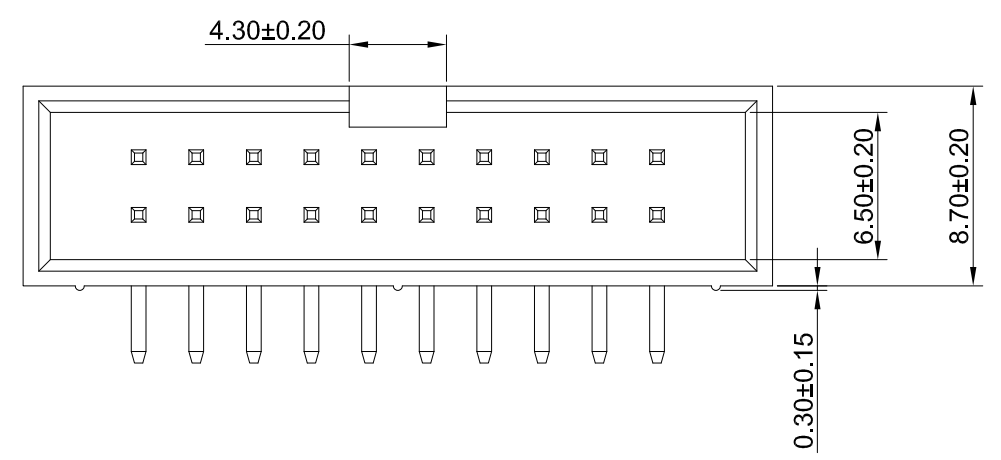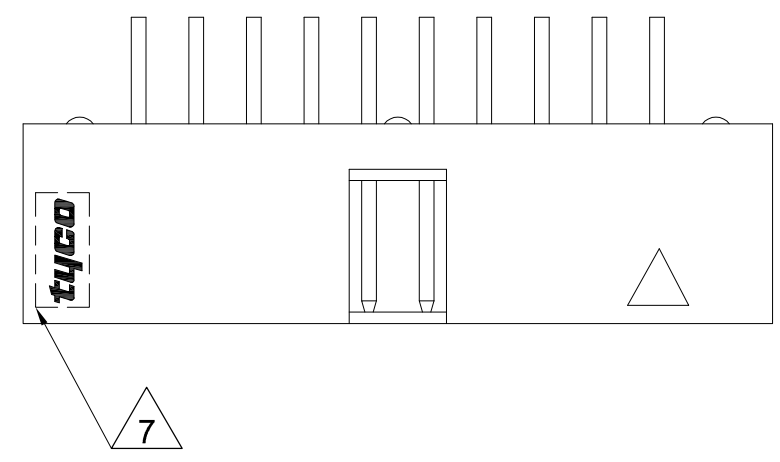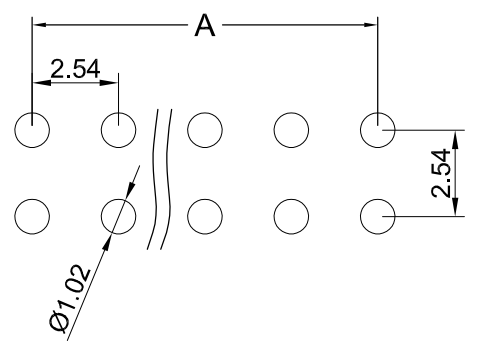

Dimensions	A	B	No Of Contacts	TE Part No
8	78.74	88.93	64	6-1634689-4
OBSOLETE	73.66	83.85	60	6-1634689-0
	60.96	71.15	50	5-1634689-0
	48.26	58.45	40	4-1634689-0
	40.64	50.83	34	3-1634689-4
	30.48	40.67	26	2-1634689-6
	22.86	33.05	20	2-1634689-0
	17.78	27.97	16	1-1634689-6
	15.24	25.43	14	1-1634689-4
	10.16	20.35	10	1-1634689-0

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	A.MOREY	14JAN04
CHK	J.SANDWELL	14JAN04
APVD	F.WHEELER-KING	14JAN04

PRODUCT SPEC: -
 APPLICATION SPEC: -
 WEIGHT: -

CUSTOMER DRAWING

SCALE: NTS SHEET: 1 OF 1 REV: C2

RESTRICTED TO: -

TE Connectivity
OBSOLETE
 NOT the LATEST REVISION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[D38999/24FJ4AN](#) [570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [358838-000](#) [CB-1022B-78](#)
[RM707012](#) [RP410012](#) [MMS42](#) [1-640426-8](#) [2EDL4CM](#) [DTS20W19-11PD-3028-LC](#) [RM202615](#) [NC6-P104-06](#) [MSPS103B](#) [DTS26F21-](#)
[41HE-LC](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [30DCB6](#) [1932144-1](#) [293545-4](#) [LVR125S](#) [MS27466T25F4PB](#)
[CKB-38-78010](#) [TR04AI-TINELLOCKRING](#) [1206SFF150F/63-2](#) [D38999/20JB35HA](#) [TE1500A2R2J](#) [D38999/20WC8BB](#) [DTS24F19-11SC-](#)
[3028-LC](#) [D38999/24WG11HA](#) [D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [MS27467T21F35J](#) [MS27467T21F11J](#)
[MS27467T21F16H-LC](#) [MS27467T21F35H](#) [MS27467T21F41H-LC](#) [1206SFH150F/24-2](#) [RP330024](#) [DJT16E21-11PA-LC](#) [DJT16E21-11HA-](#)
[LC](#) [DJT16E21-11AA](#) [MS27467T21B11JA](#) [DJT16E21-11JA](#) [MS27467T21B11JA-LC](#)