


LOC		DIST		REVISIONS			
P	LTR	DATE	DMN	APVD			
P	REVISED PER ECO-11-004820	21MAR11	RK	HMR			

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
- FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, ALL OVER 0.00127 [.000050] NICKEL ENTIRE POST.

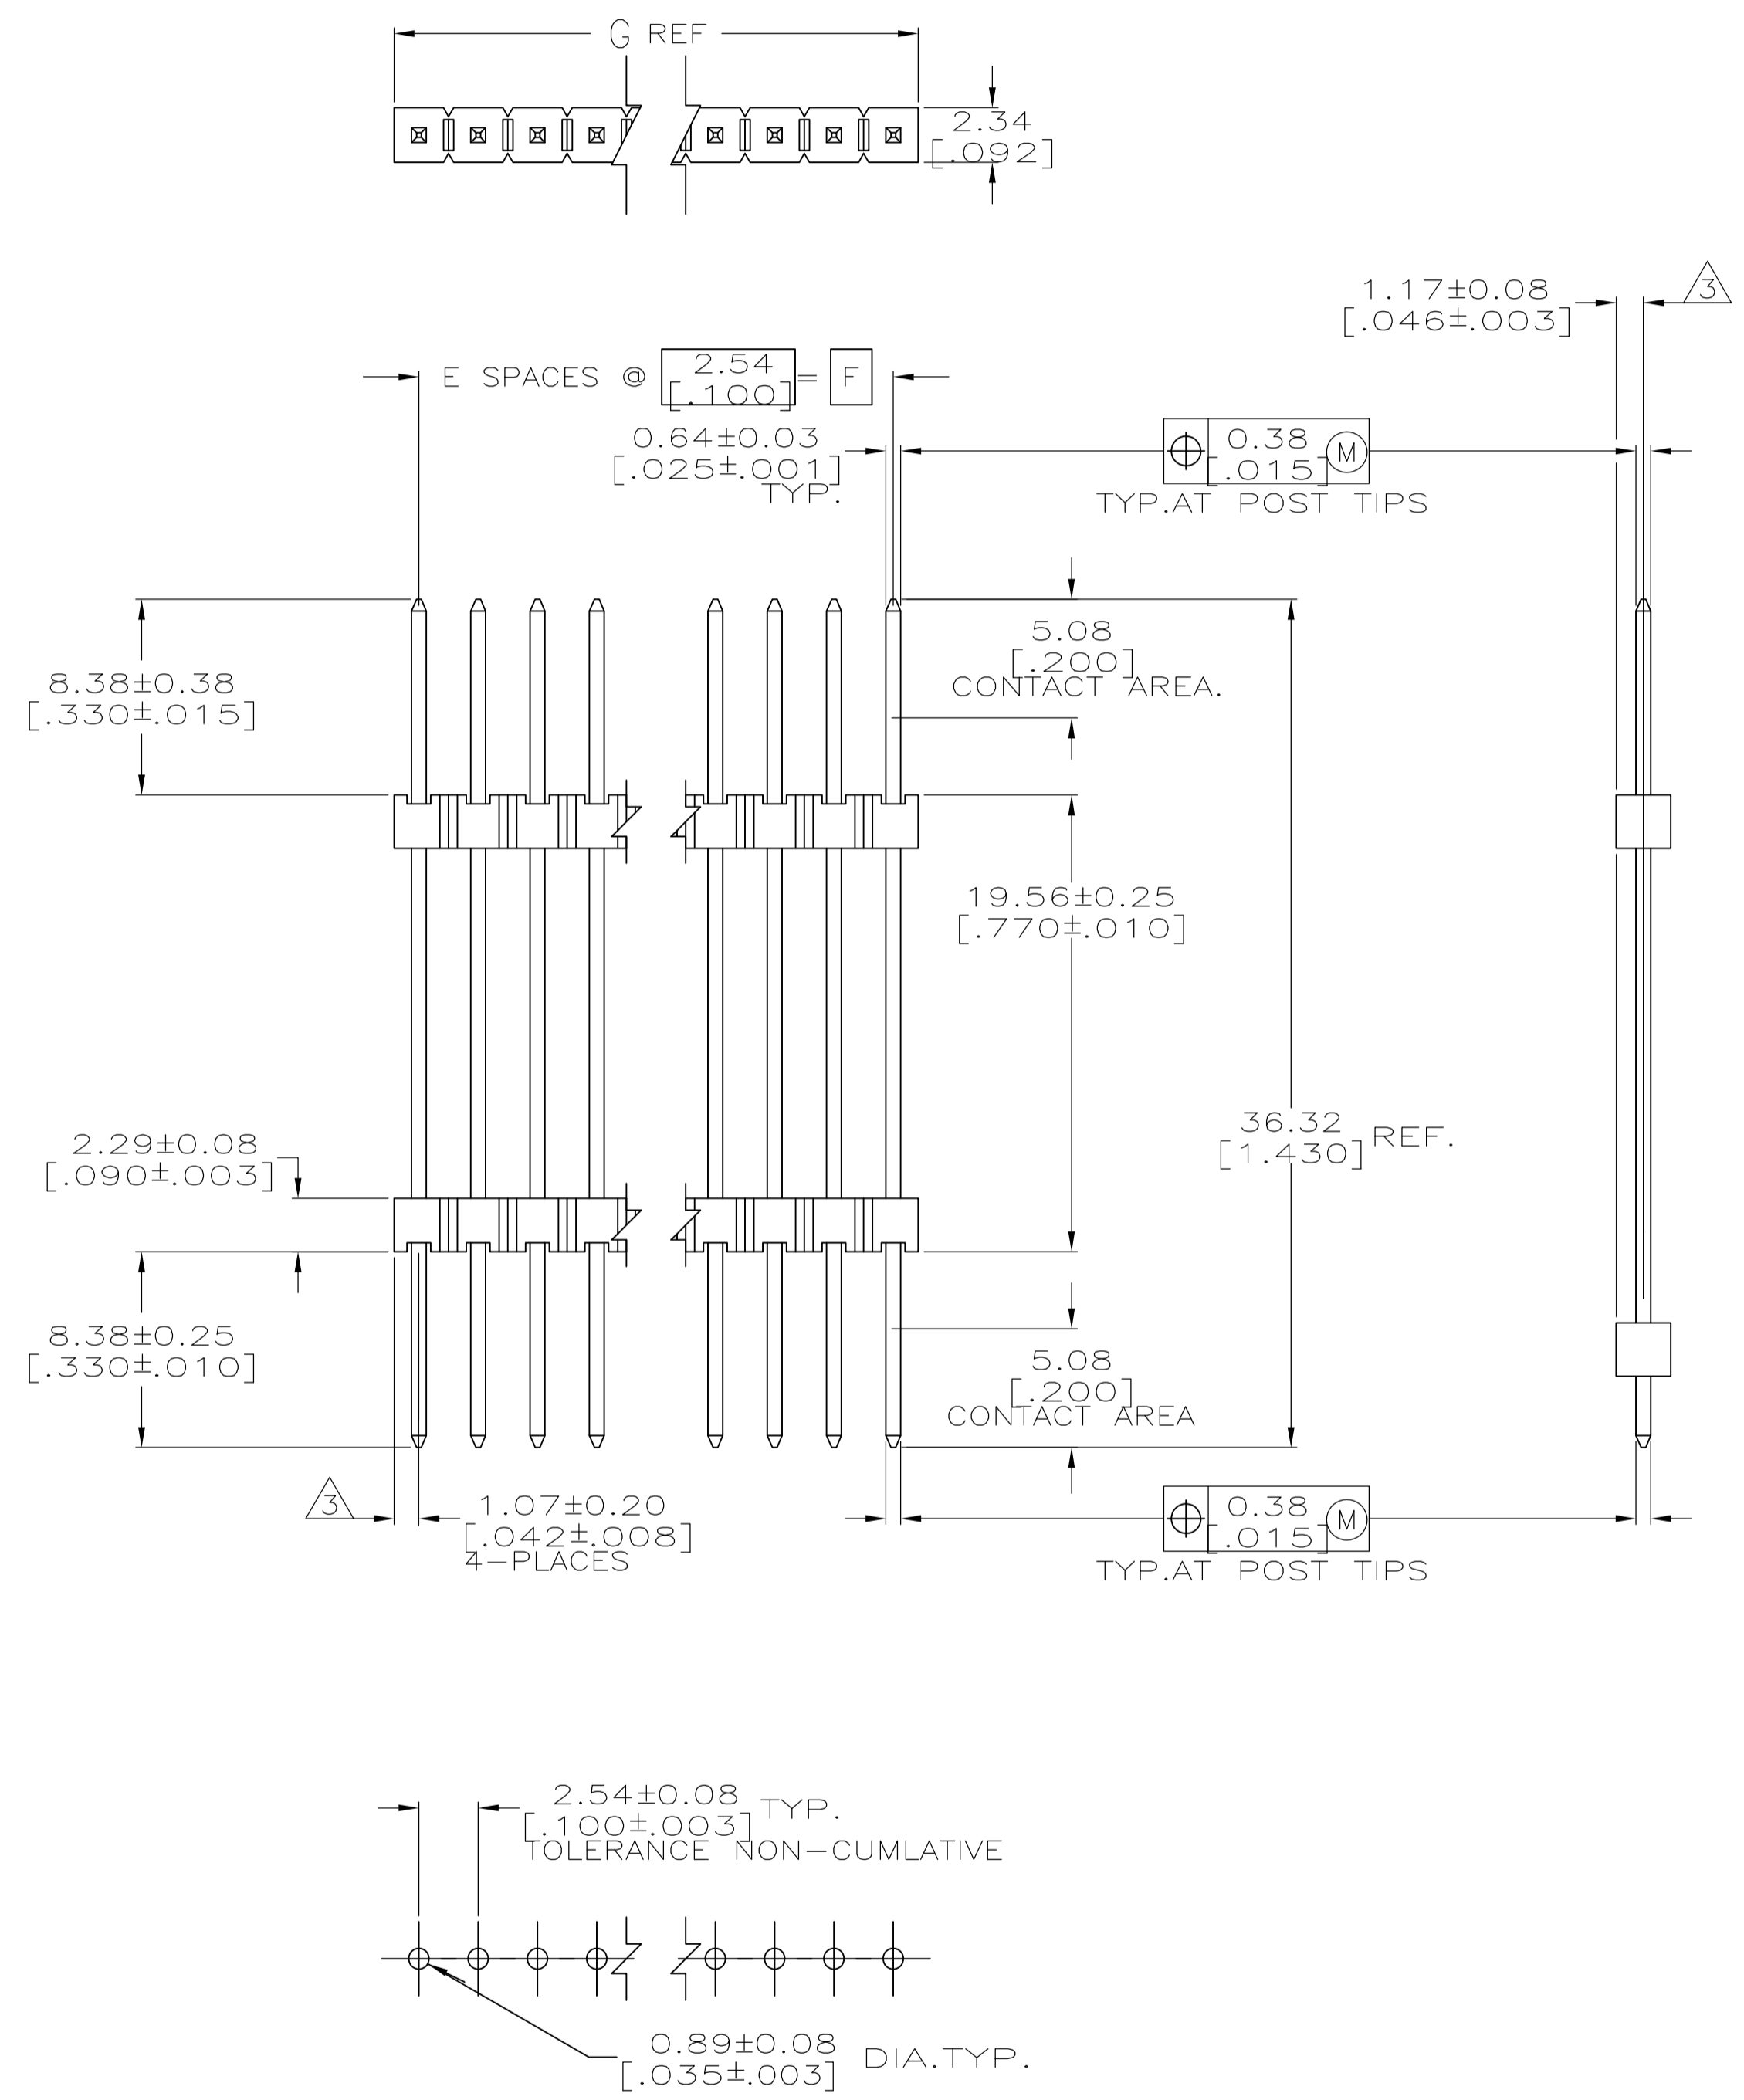

RECOMMENDED HOLE LAYOUT

NO. OF POSITIONS	NO. OF POSITIONS	NO. OF POSITIONS	NO. OF POSITIONS	PART NUMBER
39	40	41	42	4-146482-0
38	39	40	41	3-146482-9
37	38	39	40	3-146482-8
36	37	38	39	3-146482-7
35	36	37	38	3-146482-6
34	35	36	37	3-146482-5
33	34	35	36	3-146482-4
32	33	34	35	3-146482-3
31	32	33	34	3-146482-2
30	31	32	33	3-146482-1
29	30	31	32	3-146482-0
28	29	30	31	2-146482-9
27	28	29	30	2-146482-8
26	27	28	29	2-146482-7
25	26	27	28	2-146482-6
24	25	26	27	2-146482-5
23	24	25	26	2-146482-4
22	23	24	25	2-146482-3
21	22	23	24	2-146482-2
20	21	22	23	2-146482-1
19	20	21	22	2-146482-0
18	19	20	21	1-146482-9
17	18	19	20	1-146482-8
16	17	18	19	1-146482-7
15	16	17	18	1-146482-6
14	15	16	17	1-146482-5
13	14	15	16	1-146482-4
12	13	14	15	1-146482-3
11	12	13	14	1-146482-2
10	11	12	13	1-146482-1
9	10	11	12	1-146482-0
8	9	10	11	146482-9
7	8	9	10	146482-8
6	7	8	9	146482-7
5	6	7	8	146482-6
4	5	6	7	146482-5
3	4	5	6	146482-4
2	3	4	5	146482-3
1	2	3	4	146482-2
1	1	2	3	146482-1
G	F	E		

THIS DRAWING IS A CONTROLLED DOCUMENT.

BRANDBERG 14-MAR-97
 G. DUBNICZKI 14-MAR-97
 G. DUBNICZKI 14-MAR-97

TE Connectivity

HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED

0.000381 [.000015] GOLD ON CONTACT AREA, ALL OVER 0.00127 [.000050] NICKEL ENTIRE POST.

SCALE 4:1 SHEET 1 OF 1 REV P

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)