


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUGUST, 2006.
 © COPYRIGHT 2006 By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	A1	ECR-18-012908	15AUG2018	RZ RS

- NOTES:
- 1 PACK IN ACCORDANCE WITH TE SPEC 107-3275
 - 2 Passivation
 - 3 CuZnSn PLATING: 80u"
 - 4 Ag PLATING: 200u"
 - 5 ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

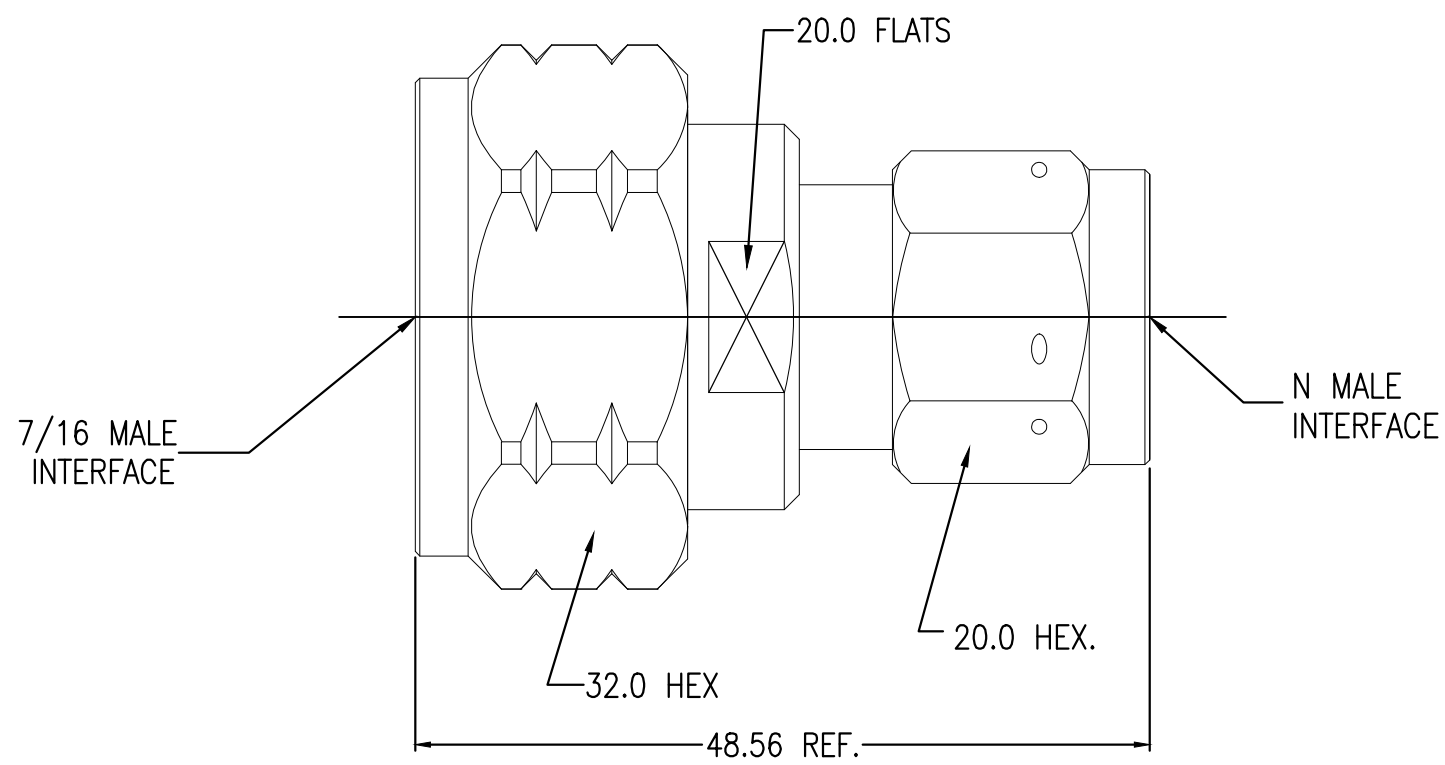

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Frequency Range (GHz) DC to 6GHz	Recommended coupling Torque 9-14 in-lbs(N) 177-265 in-lbs(7/16)	Temperature Rating -55°C TO +125°C
Voltage Rating (Peak) @ Sea Level 1000 V RMS	Mating cycles 500 cycles	
Insulation Resistance (MIN.) 5000 M ohms	Center contact retention force 40 lbs MIN	
Contact Resistance (Milliohms MAX) Center Contact 1.0 Outer Contact 1.5	Power handling: 300W@2GHz @90°C	
Dielectric Withstand Voltage: 2500 V RMS Max	3rd Intermodulation: <-166dBc@2X43dBm 900MHz/1800MHz	
Insertion Loss : 0.1*√F(GHz) dB		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN ED 13JUN 2018
DIMENSIONS: mm		CHK BW 13JUN 2018
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD RS 13JUN 2018
0 PLC ± -	1 PLC ± 0.2	PRODUCT SPEC -
2 PLC ± 0.1	3 PLC ± -	APPLICATION SPEC -
4 PLC ± -	ANGLES ± -	WEIGHT 0.000000
MATERIAL SEE TABLE	FINISH -	CUSTOMER DRAWING

QUANTITY PER ASSY	PARTS LIST
2	PE (BLUE) DUST CAP 6
1	STEEL SHELL(N) 5
1	BRASS SHELL(7/16) 4
1	PTFE INSULATION 3
1	BRONZE CENTER CONTACT 2
1	BRASS BODY 1
-1	MATERIAL DESCRIPTION ITEM

STE TE Connectivity			
NAME ADAPTER N Male to 7/16 DIN Male			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2081557	-
SCALE 2:1		SHEET 1 OF 1	REV A1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Adapters - Between Series](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[5945-9503-000](#) [MCX/F-SMA/M](#) [R192417010](#) [ADBJ20-E1-BJ379](#) [ADM2](#) [ADPL75-A1-PL75](#) [242191](#) [9317505](#) [29-3835P](#) [AD130](#) [ADBJ20-E1-PL74](#) [ADBJ77-A1PL3155](#) [ADBJ77-E1-UPL20](#) [ADRMF370](#) [242215](#) [242228](#) [R125680000W](#) [R192430000](#) [UAD95](#) [1057367-1](#) [8311505](#) [R114704000](#) [R451034500](#) [R451030500](#) [R451543000](#) [HDVDPN](#) [ADBJ20-K1-PL20](#) [R451570000](#) [R192419000](#) [R451034000](#) [J9](#) [J3WE-5](#) [R451032500](#) [242201RP](#) [17K132-K00S5](#) [03K719-S22S3](#) [AD-RSMAF-RTNC](#) [53K156-K00N5](#) [53K160-KIMN1](#) [02K119-K00E3](#) [29S132-K01N5](#) [53S156-K00N5](#) [02S119-S00E3](#) [28K132-K00N5](#) [02S109-K00S3](#) [27-8200TP](#) [242235](#) [ADBJ20-E1-BJ89](#) [ADP-SMAF-MMCXM](#) [000-2900](#)