


REVISIONS		
LTR	DESCRIPTION	DATE
B	REVISED DWG PER ECO-11-002021	01/28/2011

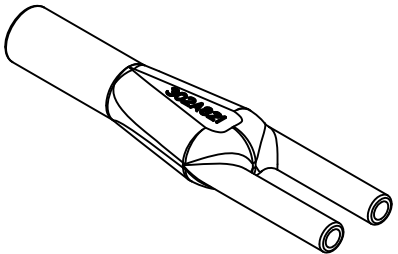


NOTES:

- ALL DIMENSIONS ARE IN: $\frac{\text{INCHES}}{\text{MILLIMETERS}}$
- DIMENSION APPEARING IN TABLE ARE AS FOLLOWS:
 a - AS SUPPLIED
 b - AFTER UNRESTRICTED RECOVERY

3. COATING (ADHESIVE) IS OPTIONAL. AS SUPPLIED DIMENSIONS APPEARING IN TABLE ARE FOR UNCOATED PARTS. WHEN COATING IS ADDED, ENTRY DIAMETER WILL BE REDUCED BY .06 MAX.

ORDERING INFORMATION: 302A821 -XX -XX /XX -0

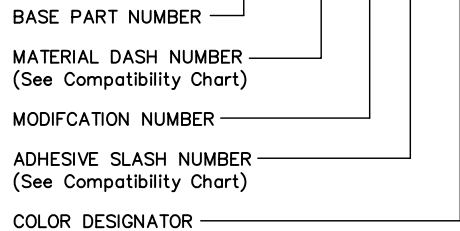

PART DESCRIPTION	H		J & K		P	R	T	W	U	V
	MIN	MAX	MIN	MAX	±10%	±10%	±20%	±20%	REF	REF
	a	b	a	b	b	b	b	b	b	b
302A821	1.30	.37	.69	.16	3.70	1.18	.06	.05	.50	.80
	[33,0]	[9,4]	[17,5]	[4,1]	[94,0]	[29,9]	[1,6]	[1,3]	[12,7]	[20,3]

COMPATIBILITY CHART

MATERIAL DASH No.	MATERIAL DESCRIPTION	RT SPEC	ADHESIVE COATING SLASH No.	ADHESIVE COATING "S" No.
-3	POLYOLEFIN, SEMI-RIGID	RT-301	/42, /86	S-1017, S-1048
-4	POLYOLEFIN, FLEXIBLE	RT-1304	/42, /86	S-1017, S-1048
-25	ELASTOMER, FLUID RESISTANT	RW-2070	/225	S-1206

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES. METRIC DIMENSIONS ARE IN BRACKETS.

DECIMAL TOLERANCES
 .XXX ± 0.005 [0.13 mm]
 .XX ± 0.01 [0.25 mm]
 .X ± 0.1 [0.50 mm]

ANGLE TOLERANCE
 .X ± 1 DEG.

DRAWN
G.Rositano
09/13/2010

APPROVED
D.Hurrell
09/13/2010

RPN

THIRD ANGLE PROJECTION

TYCO ELECTRONICS RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANY TIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.

© 2010-2011 Tyco Electronics Corporation. All rights reserved.

CUSTOMER DRAWING

Tyco Electronics
 Raychem Molded Parts
 305 Constitution Dr
 Menlo Park, CA 94025

TITLE
 TRANSITION, 3 ENTRY

SIZE B CODE IDENT. NO. 06090 DWG. NO. 302A821

DO NOT SCALE THIS DRAWING SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Shrink Cable Boots & End Caps](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[577159N001](#) [645494-000](#) [CX4132-000](#) [687025-000](#) [705331-000](#) [718446-000](#) [725666N001](#) [729257-000](#) [F27131-000](#) [F85868-000](#) [770-003S106W2](#) [770-013210W1](#) [770-013311](#) [770-013312](#) [806542N001](#) [807507-000](#) [808362-000](#) [808618-000](#) [809125-000](#) [809130-000](#) [809218-000](#) [812014-000](#) [812047-000](#) [813166-000](#) [813767N002](#) [814741-000](#) [819117N001](#) [823026-000](#) [823070-000](#) [841189N001](#) [861471-000](#) [866647-000](#) [879515-000](#) [937577-000](#) [957073-000](#) [982033-2](#) [A77813-000](#) [R280576000](#) [D96192-000](#) [163549-000](#) [EN3BOOTLKIT](#) [MTPSRBCL-C](#) [1954015-1](#) [200W531-3-0](#) [202A163-4-0-CS5067](#) [202A343-3-00-0](#) [202B221-13-0](#) [202B231-13-0](#) [202B563-25-07-0](#) [202C241-13-0](#)