


THERMOFIT • SPECIFICATION CONTROL DRAWING • MOLDED PARTS

NOTES

1. All dimensions are in inches; all angles are in degrees.
2. Dimensions appearing in table below are as follows:
a - As supplied b - After unrestricted recovery
3. Weight shown in table of dimensions is based on polyolefin part.
4. Molding ports are optional. When specified, they will be located as shown. Order 381A115-3-00 when molding ports are required.

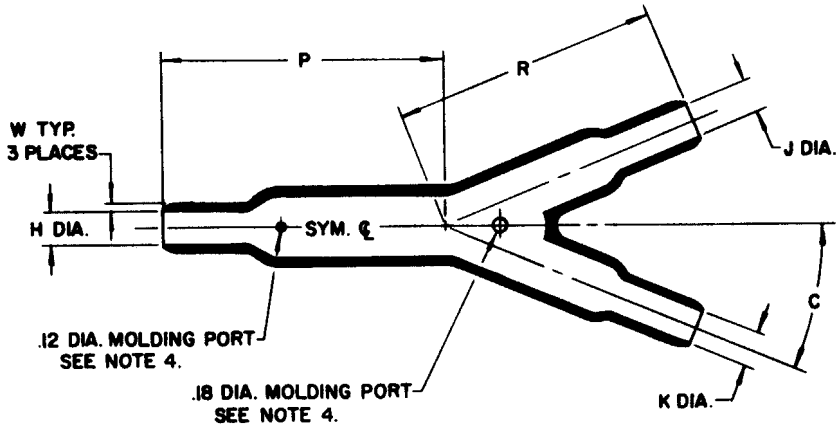

ORDERING INFORMATION

Matl. No.	Description	Rayclad Matl. Spec.	Specific Grav. Max.
3	Polyolefin	RT 301	1.40
4	Flex poly	RT 1304	1.40
5	Neoprene	RT 501	1.50
6	Silicone, flame retarded	RT 602	1.35
12	Viton	RT 1312	1.95
25	Elastomer, fluid resistant	RT 1325	

Add material number as suffix to part number;
Example - Order 381A115-3 when polyolefin is required.

TABLE OF DIMENSIONS

PART NO.	H		J and K		P		R		HW		JW and KW		C		Weight lbs ±10%
	Min a	Max b	Min a	Max b	Max a	±10% b	Max a	±10% b	a	±20% b	a	±20% b	±10° a	±5° b	
381A115-	1.12	.49	1.06	.49	-	3.44	-	3.45	-	.10	-	.10	10	22-1/2	.135

Raychem

E.O.	REV	DATE	DESCRIPTION	DRN	DD	PART DESCRIPTION TRANSITION, Y	PART NO.	REV LTR
				CHK'D	KT		381A115	D
				AUTH	RW			
				AUTH	HP		DATE	May 31, 1984

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Shrink Cable Boots & End Caps](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[577159N001](#) [645494-000](#) [CX4132-000](#) [687025-000](#) [705331-000](#) [718446-000](#) [725666N001](#) [729257-000](#) [F27131-000](#) [F85868-000](#) [770-003S106W2](#) [770-013210W1](#) [770-013311](#) [770-013312](#) [806542N001](#) [807507-000](#) [808362-000](#) [808618-000](#) [809125-000](#) [809130-000](#) [809218-000](#) [812014-000](#) [812047-000](#) [813166-000](#) [813767N002](#) [814741-000](#) [819117N001](#) [823026-000](#) [823070-000](#) [841189N001](#) [861471-000](#) [866647-000](#) [879515-000](#) [937577-000](#) [957073-000](#) [982033-2](#) [A77813-000](#) [R280576000](#) [D96192-000](#) [163549-000](#) [EN3BOOTLKIT](#) [MTPSRBCL-C](#) [1954015-1](#) [200W531-3-0](#) [202A163-4-0-CS5067](#) [202A343-3-00-0](#) [202B221-13-0](#) [202B231-13-0](#) [202B563-25-07-0](#) [202C241-13-0](#)