



LOC	DIST	REV	DATE	BY	CHK	APPV
GP	00	1				
		4	11 JAN 2011	WS		MH
		5	11 MAY 2012	REH		DT


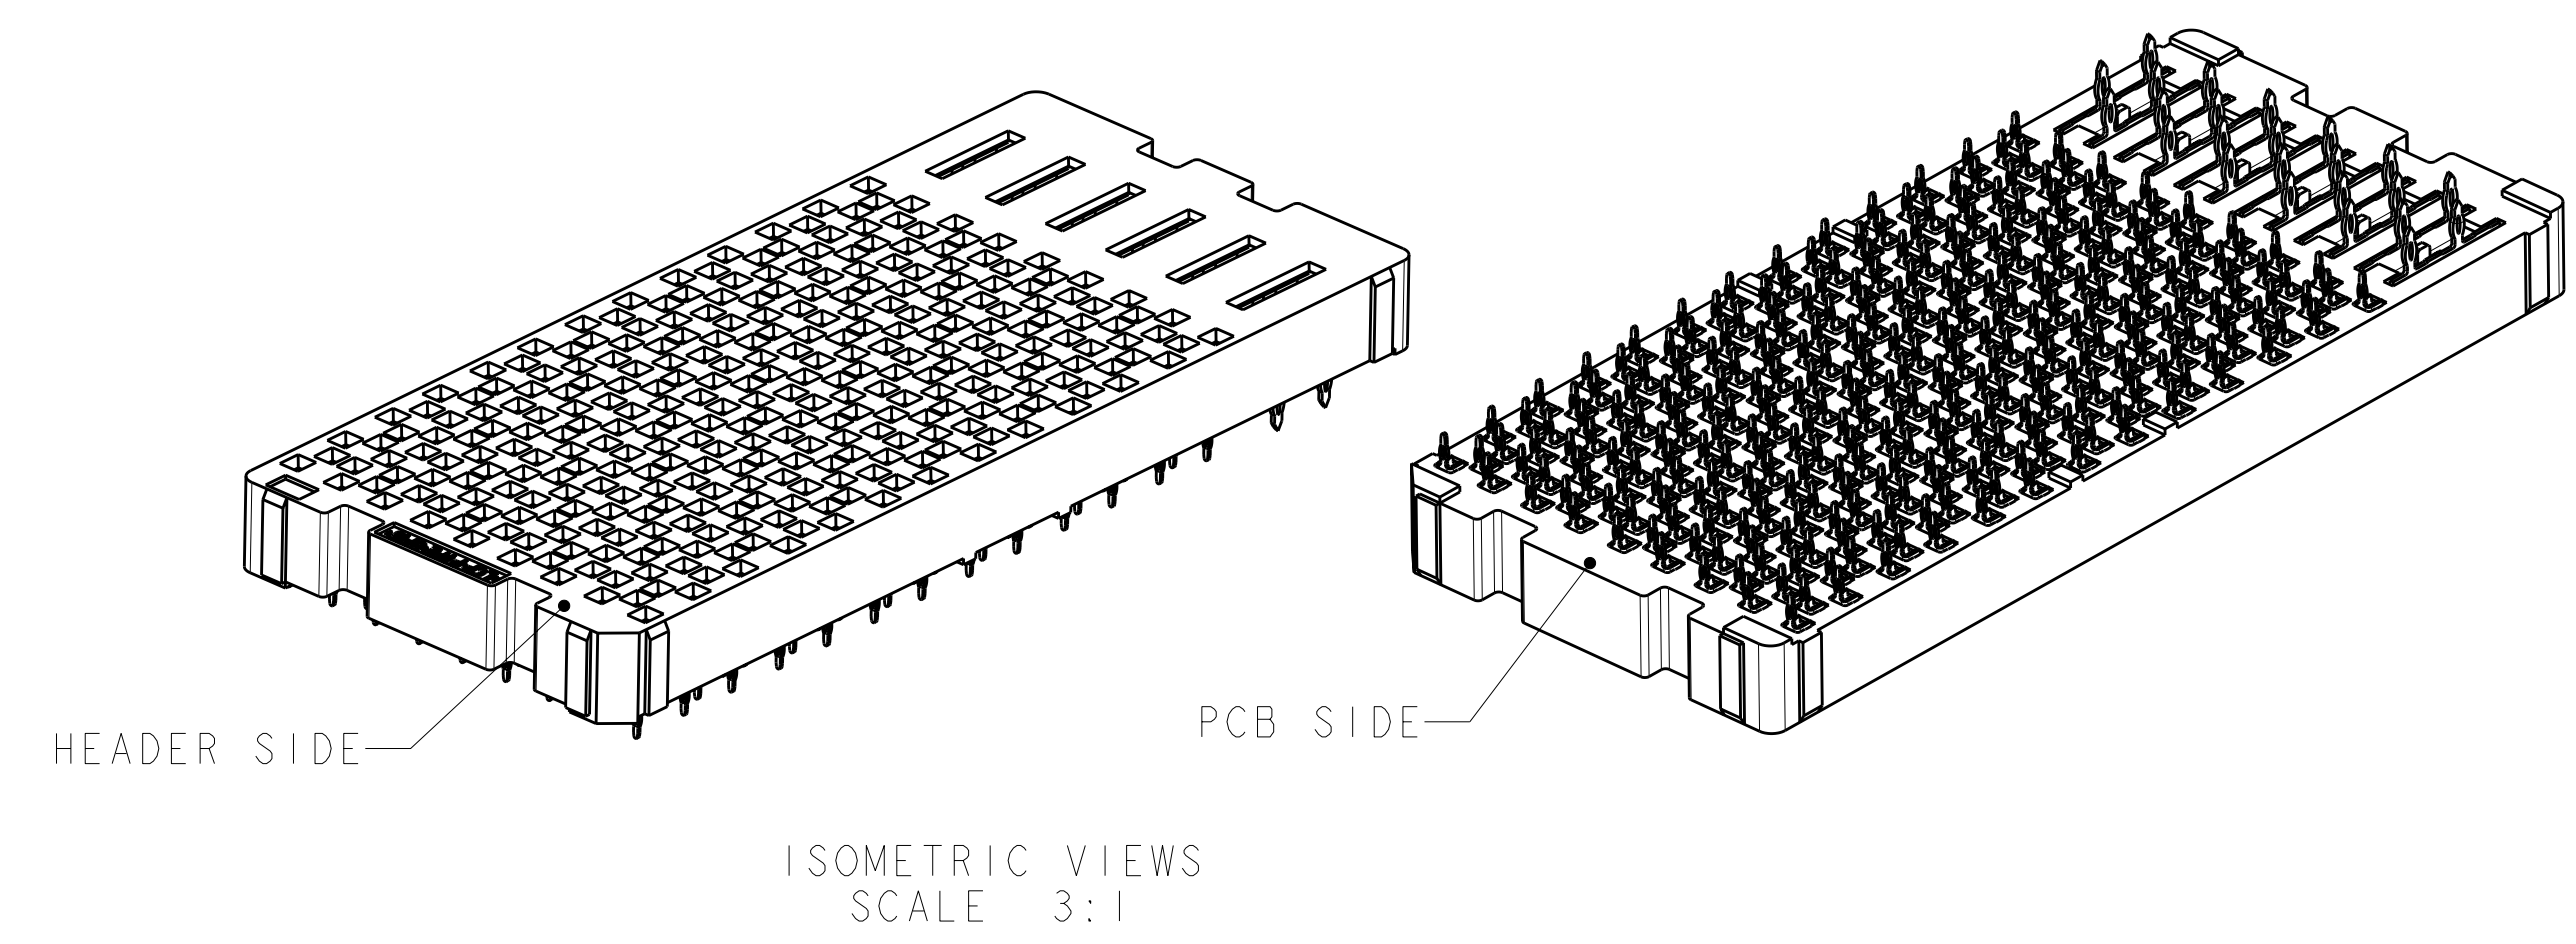


- △ MATERIAL:  
 HOUSING: THERMOPLASTIC, FLAMMABILITY RATING UL94-V0  
 CONTACT: COPPER ALLOY
2. CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION, 108-2375; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III, APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE). SEE TE PRODUCT SPECIFICATION 108-2375 FOR TEST SEQUENCES.
- △ ROWS GA THRU GJ (SHOWN DARKENED) ARE TYPICALLY USED AS GROUNDS.
- △ SPECIFIED POSITIONAL TOLERANCE DEFINES HOLE TO HOLE LOCATION WITHIN HOLE PATTERN. POSITIONAL TOLERANCE OF HOLE PATTERN TO FIDUCIAL MARKS OR PCB DATUMS SHALL BE DEFINED BY CUSTOMER.
- △ AREA RESERVED FOR TE CONNECTIVITY LOGO.
- △ AREA RESERVED FOR PART NUMBER (X-XXXXXXX-X) AND DATE CODE (YYWW).
- △ USE CENTERLINES INDICATED ON PCB HOLE PATTERN TO ESTABLISH ALIGNMENT BETWEEN HEADER AND RECEPTACLE BOARDS.
- △ PLATED THROUGH HOLE REQUIREMENTS - SIGNAL:  
 HOLE SIZE PRIOR TO PLATING =  $\varnothing 0.420 \pm 0.013$   
 COPPER PLATING THICKNESS =  $0.038 \pm 0.013$   
 CALCULATED FINISHED HOLE SIZE =  $\varnothing 0.344 \pm 0.039$   
 THESE DIMENSIONS APPLY TO THE TOP 1.25mm OF THE PCB THICKNESS FROM THE CONNECTOR MOUNTING SIDE.
- △ PLATED THROUGH HOLE REQUIREMENTS - POWER:  
 HOLE SIZE PRIOR TO PLATING =  $\varnothing 0.700 \pm 0.025$   
 COPPER PLATING THICKNESS =  $0.038 \pm 0.013$   
 CALCULATED FINISHED HOLE SIZE =  $\varnothing 0.624 \pm 0.051$   
 THESE DIMENSIONS APPLY TO THE TOP 1.50mm OF THE PCB THICKNESS FROM THE CONNECTOR MOUNTING SIDE.

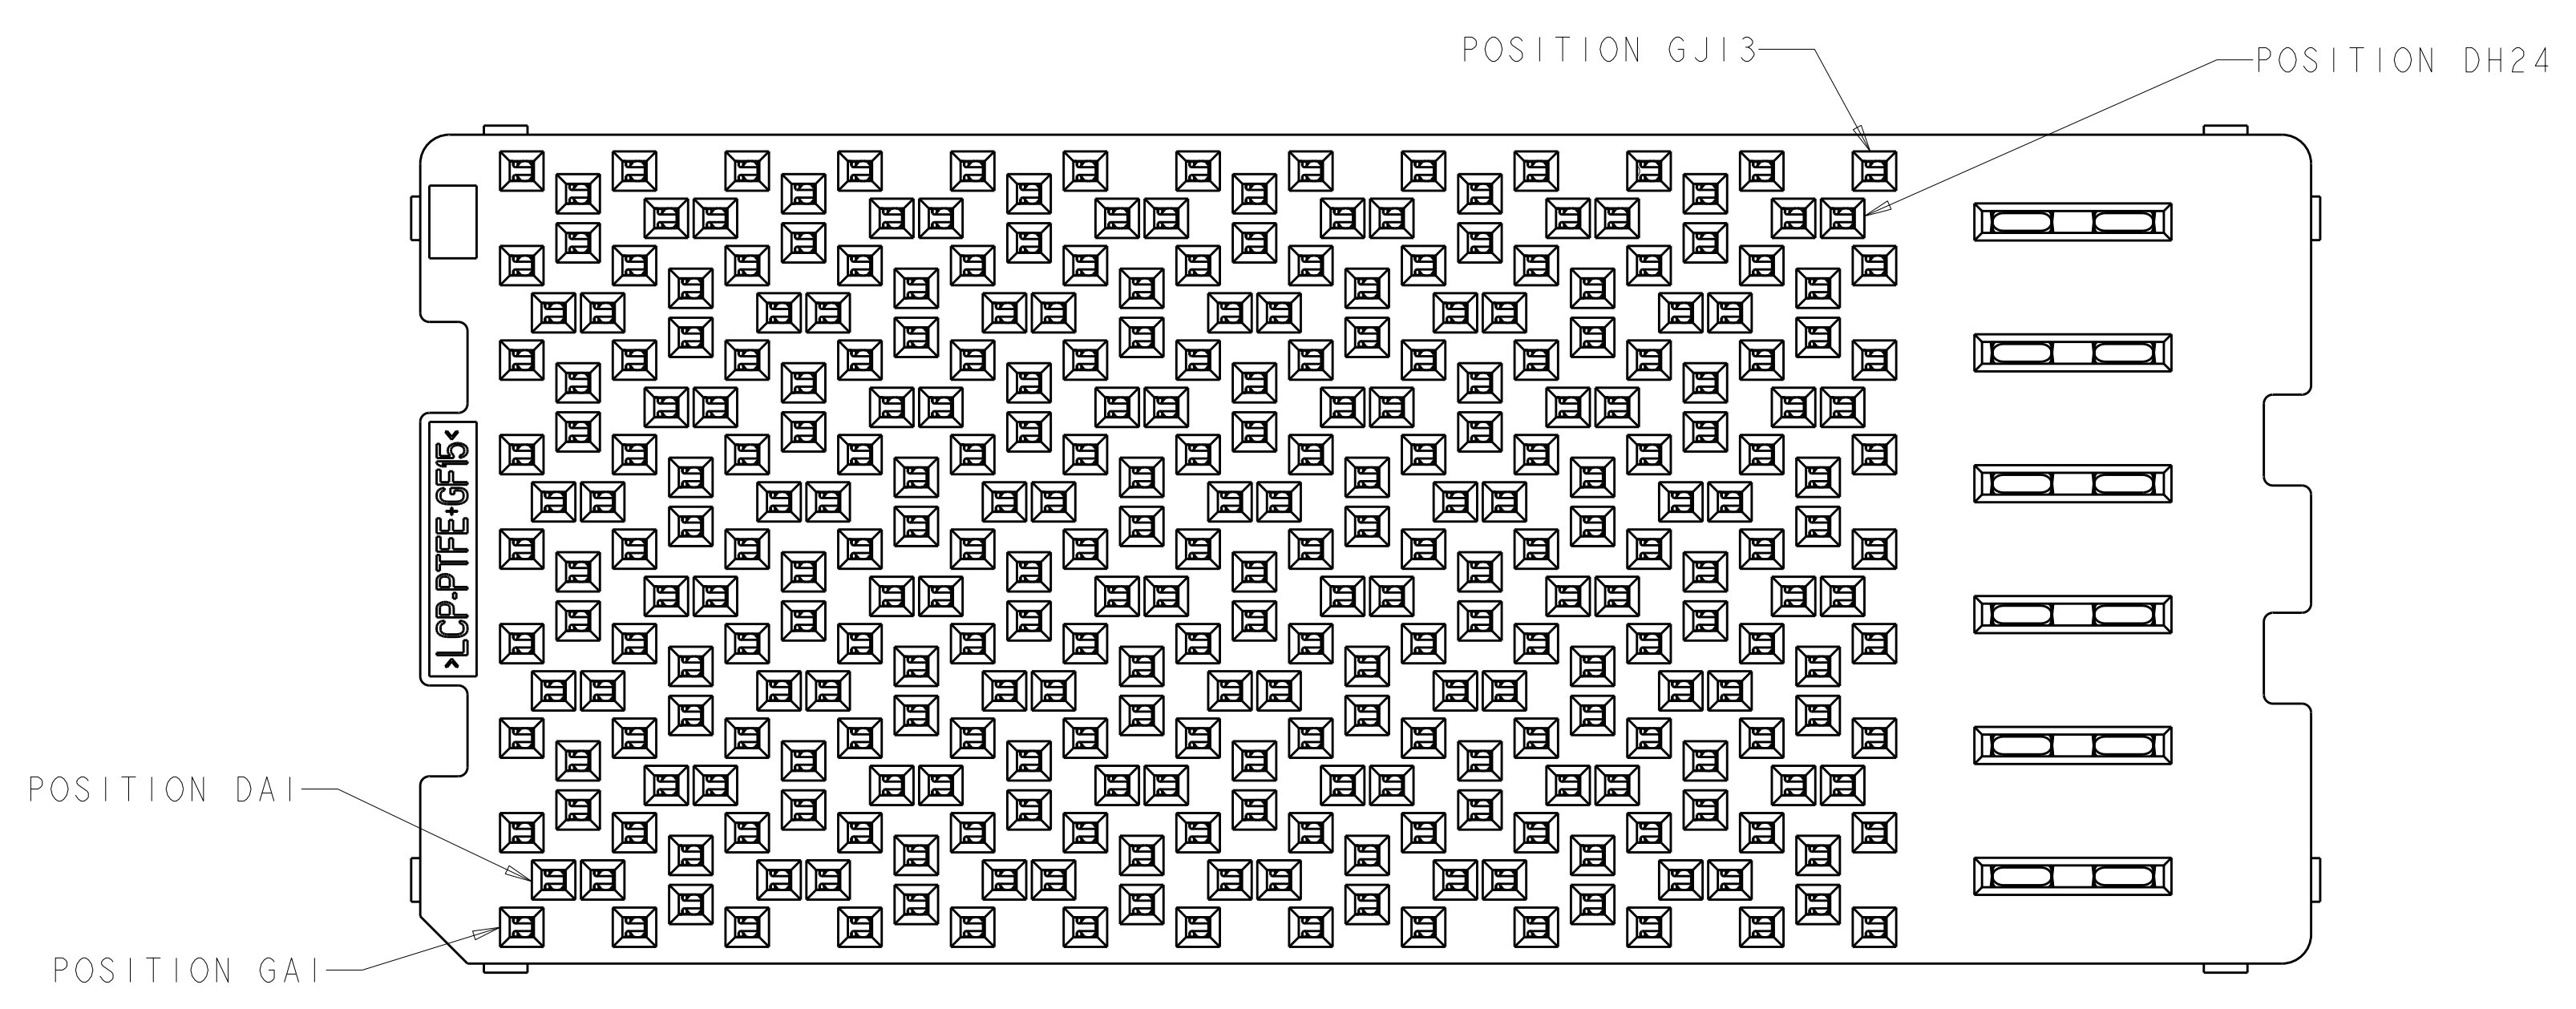

**SIZE 3 HOUSING \***  
**96 DIFFERENTIAL PAIRS**  
**309 TOTAL SIGNAL CONTACTS**  
**6 POWER CONTACTS**

\* SIZE 1 AND SIZE 2 ARE ALSO AVAILABLE

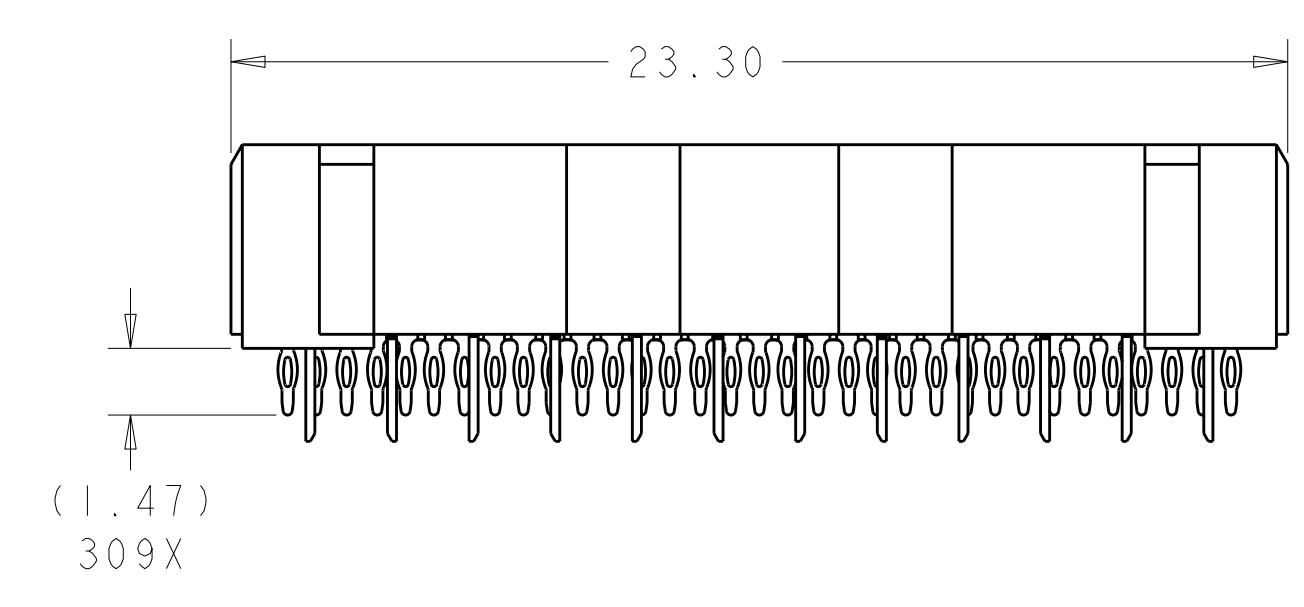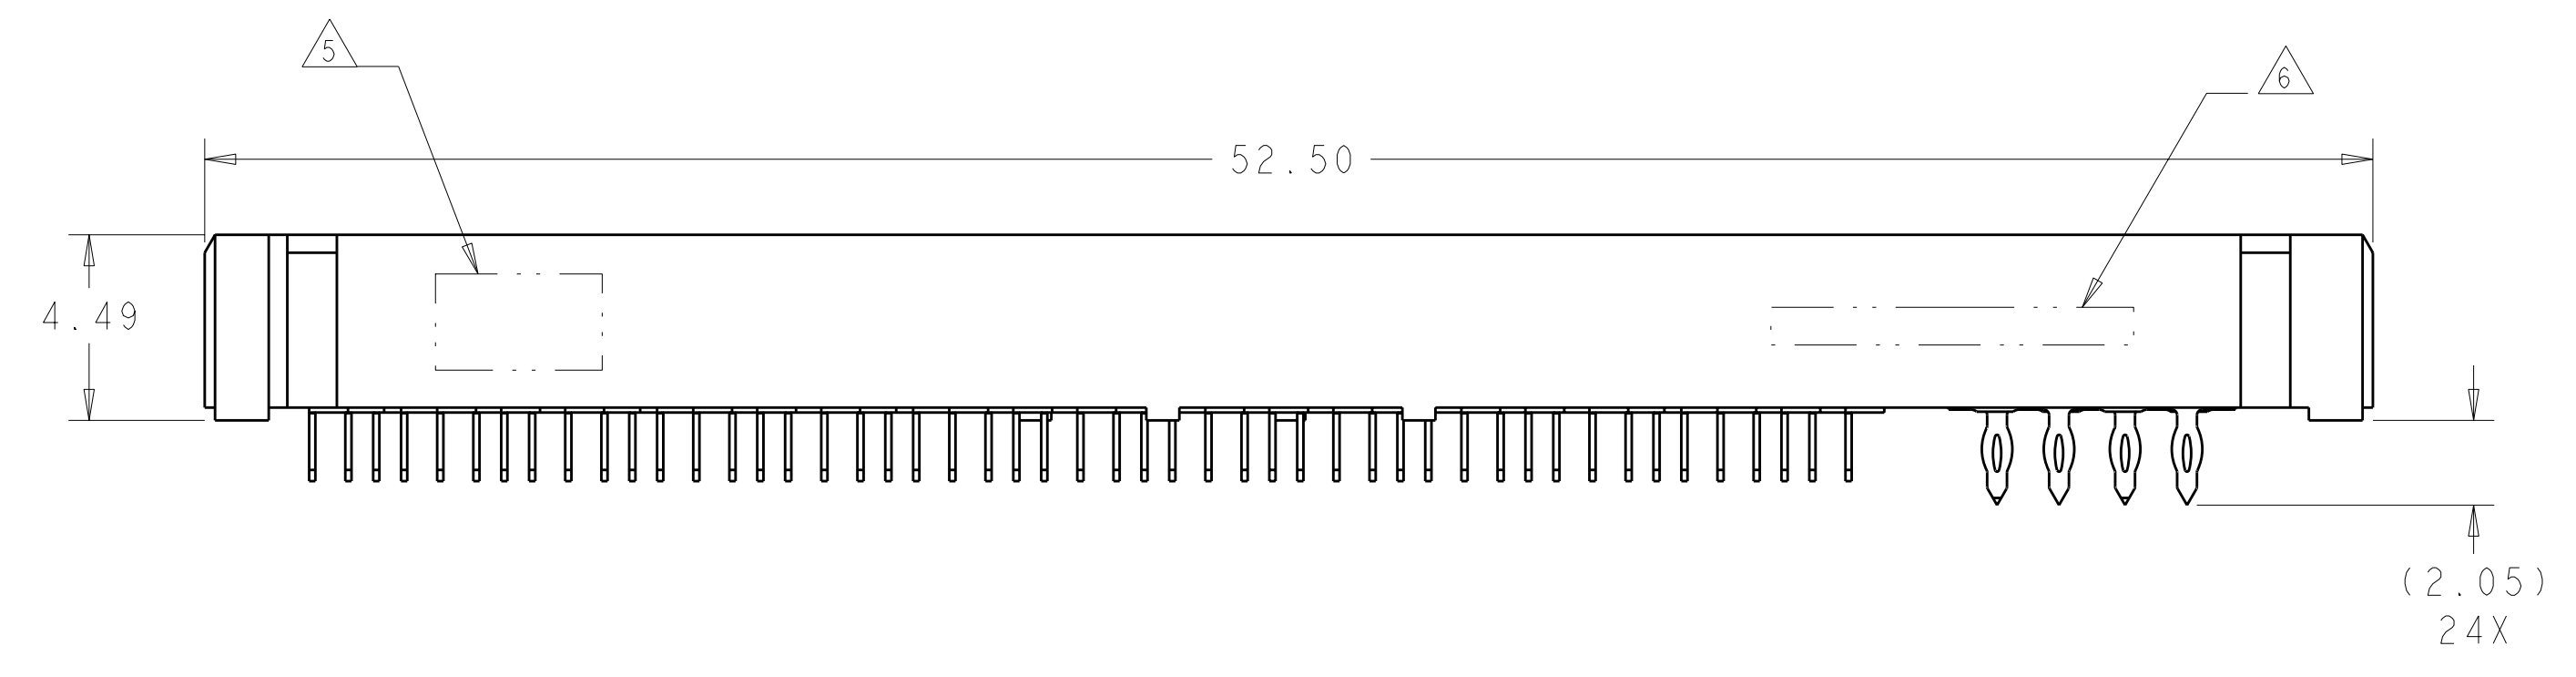


THIS PRODUCT HAS NOT COMPLETED VALIDATION AND QUALIFICATION TESTING

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: D. RINGLER 08JUN2009	DATE: 08JUN2009
DIMENSIONS: mm		CHK: D. TROUT 08JUN2009	DATE: 08JUN2009
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPV: J. FEDDER 08JUN2009	DATE: 08JUN2009
0 PLC	±	PRODUCT SPEC	108-2375
1 PLC	± 0.13	APPLICATION SPEC	114-13249
2 PLC	± 0.013	SIZE	114-13249
3 PLC	±	WEIGHT	
4 PLC	±	FINISH	
ANGLES	#1	CUSTOMER DRAWING	SCALE 6:1 SHEET 1 OF 3 REV 5

YES	MATTE Sn	5-2110481-1
	Sn/Pb	2110481-1
TOOLED	CONTACT TAIL PLATING	PART NUMBER

TE Connectivity	
NAME: RECEPTACLE ASSEMBLY 96/309/6P	
STRADA MESA MEZZANINE CONNECTOR	
SIZE	CAGE CODE DRAWING NO
A1100779	C=2110481



LOC	DIST	REV	DATE	BY	APPD
GP	00				
REVISIONS					
		DESCRIPTION	DATE	DWN	APPD
		SEE SHEET 1			

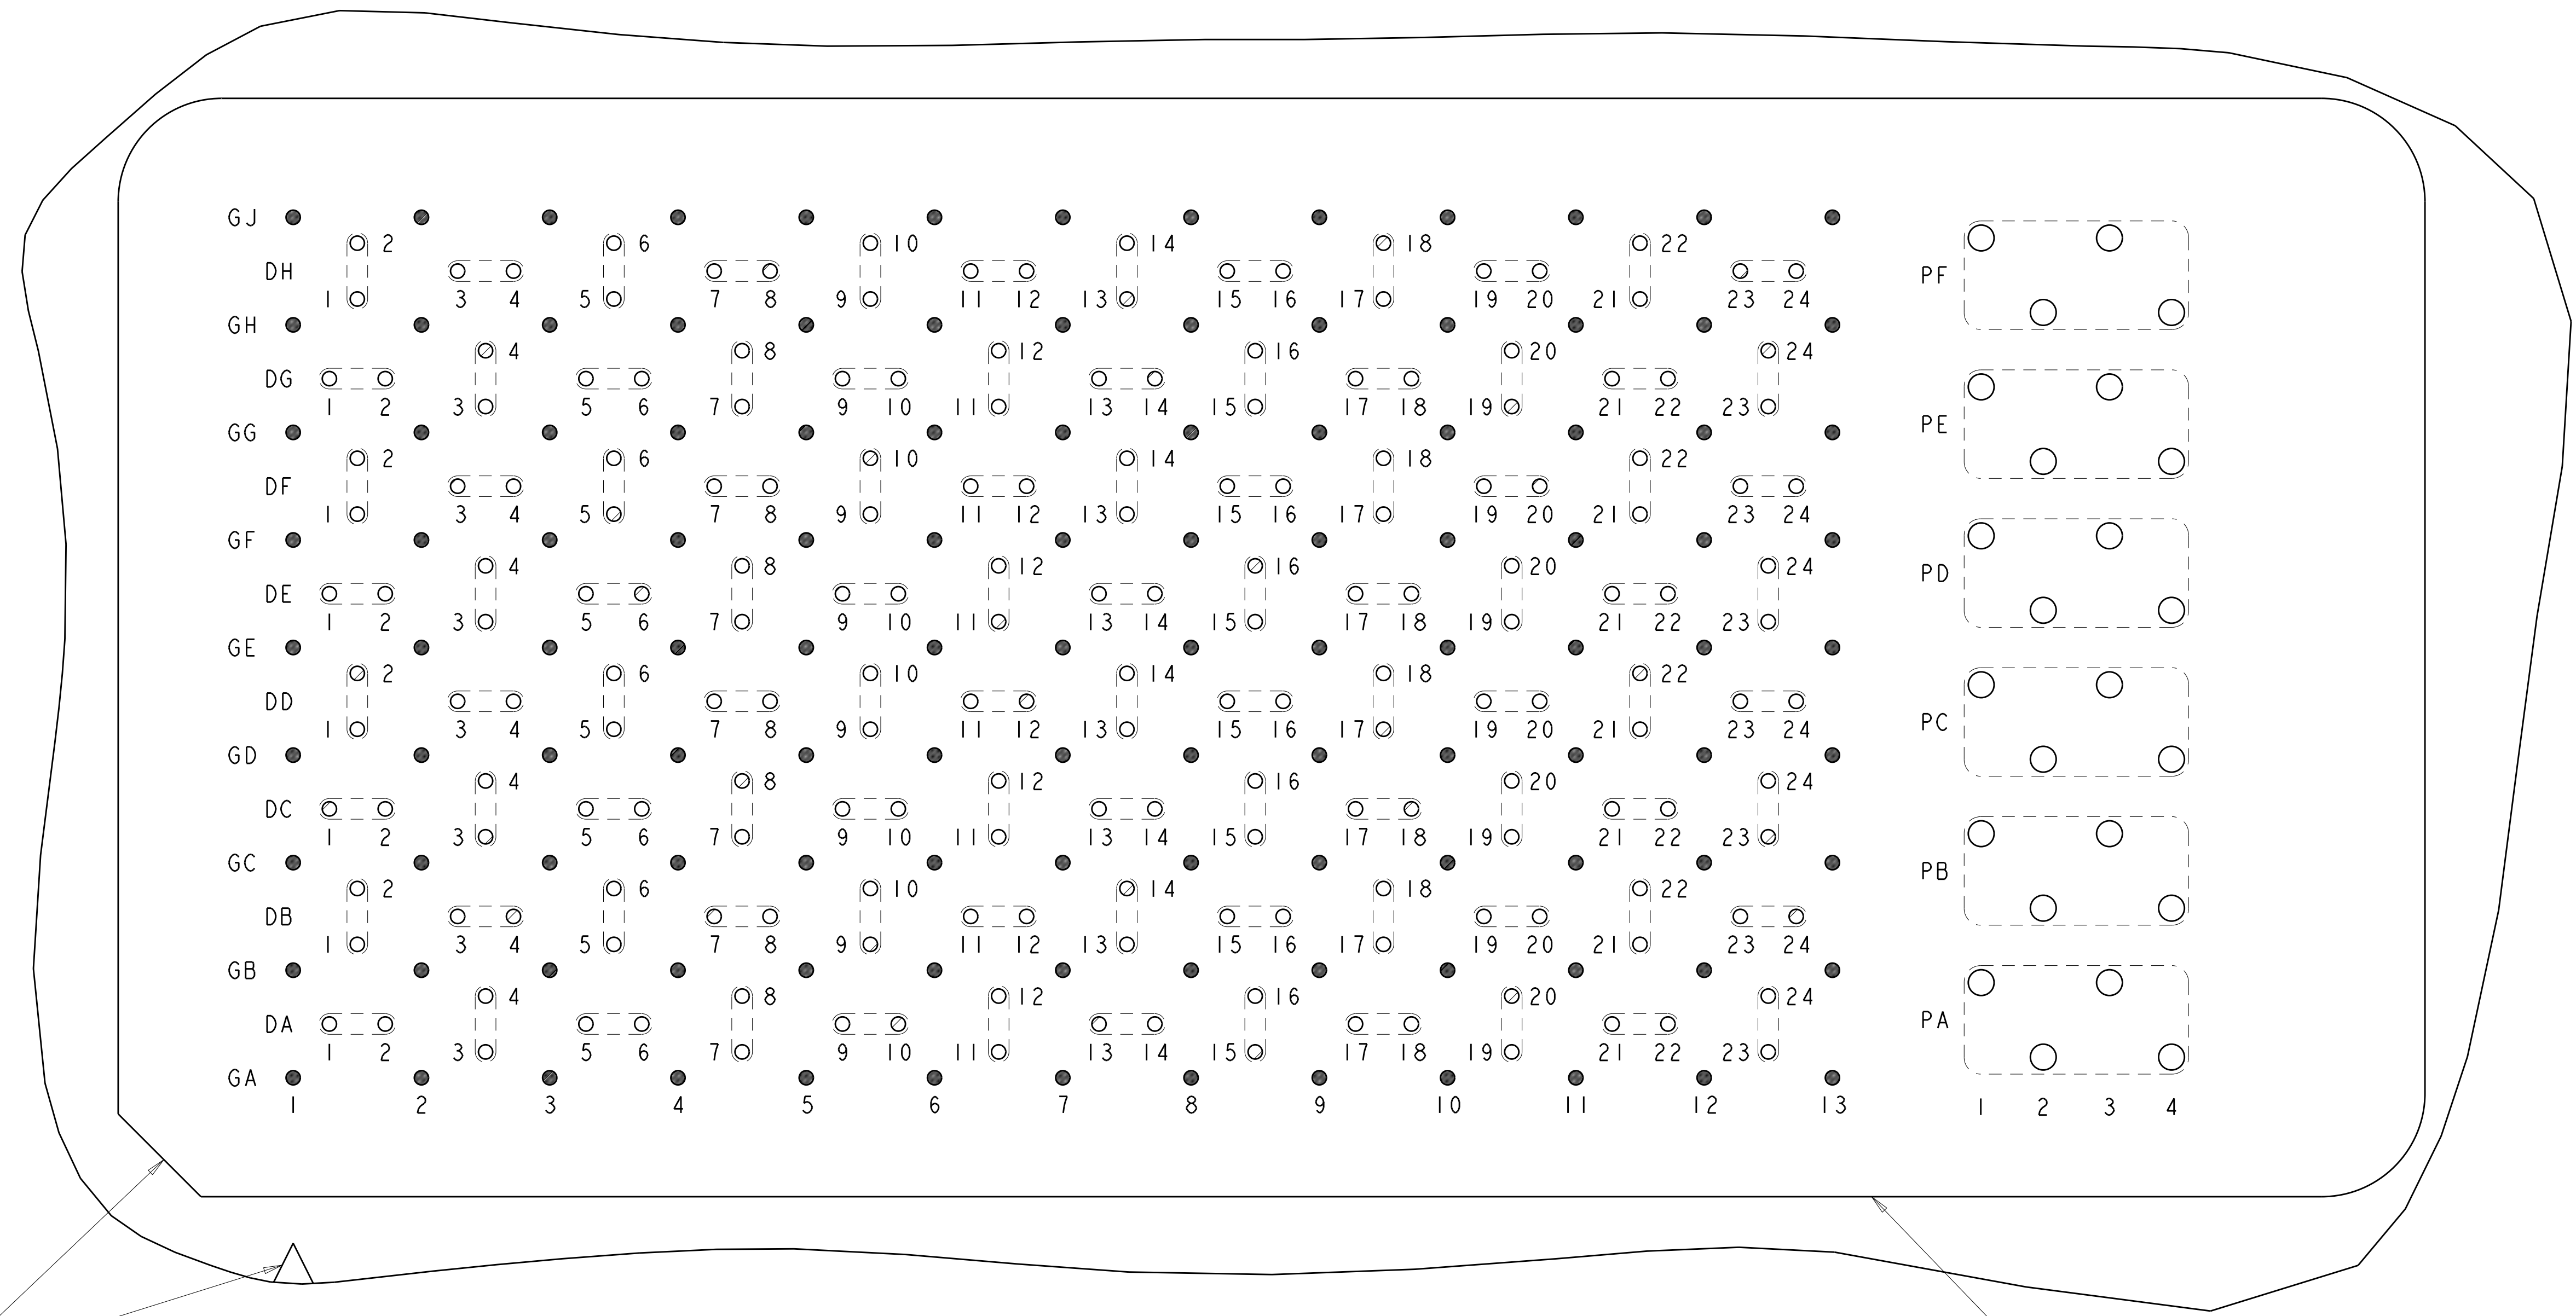


A1 CORNER INDICATORS.

**PCB LAYOUT AND PIN IDENTIFICATION**   
 SHOWN FROM CONNECTOR SIDE  
 SCALE 10:1

MATED CONNECTOR OUTLINE  
 SEE SHEET 3 FOR LOCATION TO HOLES

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. RINGLER 08JUN2009	 TE Connectivity	
DIMENSIONS:		CHK D. TROUT 08JUN2009	NAME	
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. FEDDER 08JUN2009	RECEPTACLE ASSEMBLY	
	0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ±0.013 4 PLC ± ANGLES ±° FINISH #1	PRODUCT SPEC 108-2375	96/309/6P	
MATERIAL		APPLICATION SPEC 114-13249	STRADA MESA MEZZANINE CONNECTOR	
		WEIGHT	SIZE A100779	DRAWING NO C=2110481
		CUSTOMER DRAWING	SCALE 6:1	SHEET 2 OF 3
			REV 5	

LOC	DIST	REVISIONS			
GP	00	REV	DATE	BY	APPROV
		1	SEE SHEET 1		

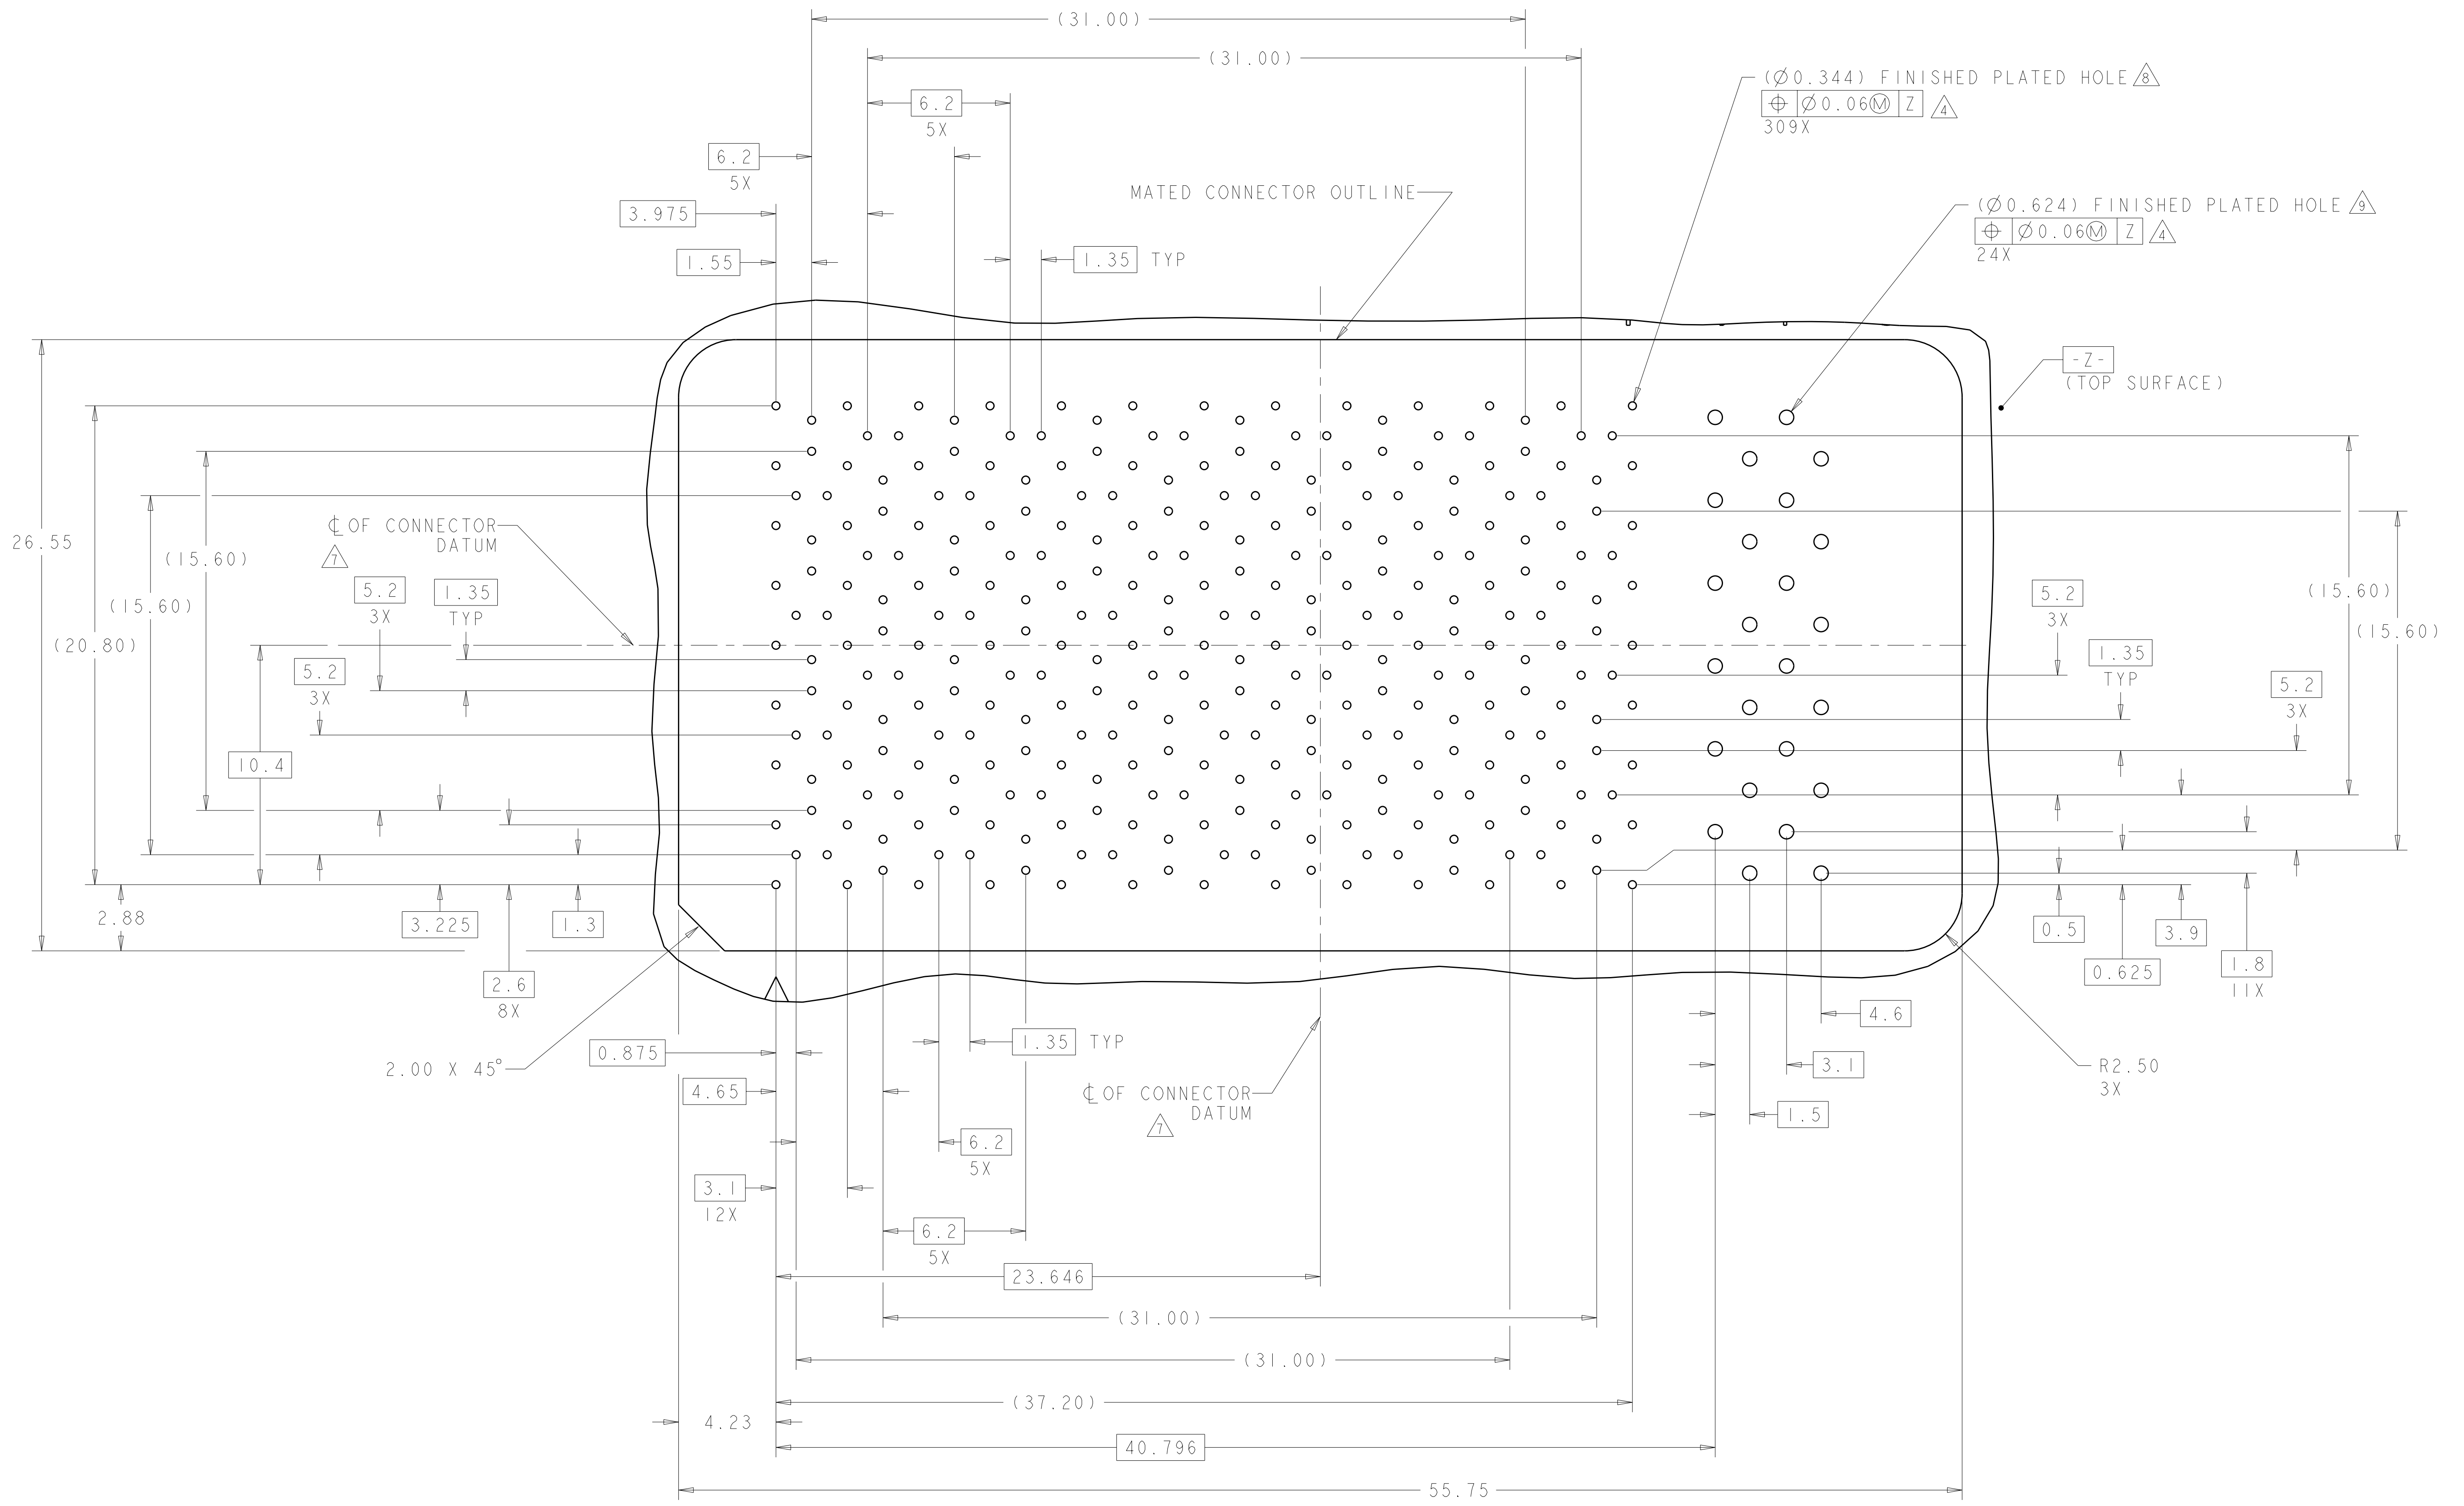

PCB HOLE PATTERN  
SHOWN FROM CONNECTOR SIDE  
SCALE 7:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: D. RINGLER 08JUN2009	TE Connectivity
DIMENSIONS: mm		CHK: D. TROUT 08JUN2009	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: J. FEDDER 08JUN2009	NAME: RECEPTACLE ASSEMBLY 96/309/6P
0 PLC ± 1 PLC ±0.13 2 PLC ±0.013 3 PLC ± 4 PLC ± ANGLES ±1	FINISH:	PRODUCT SPEC: 108-2375 APPLICATION SPEC: 114-13249 WEIGHT:	SIZE: CAGE CODE DRAWING NO: A1100779C=2110481 RESTRICTED TO:
MATERIAL:		CUSTOMER DRAWING	SCALE: 6:1 SHEET 3 OF 3 REV 5

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68684-306](#) [75140-7012](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#) [AXE720127](#)