



**Einsatzbereich: - 923 Stecker, Durchführung
- 940 Stecker, Durchführung (Signalkontakt)**

**TE Teile Nr.: 60-0254-011-000
IC Ref. Nr.: 60.254.11**

Elektrische Werte

Bemessungsstrom max. 25 A*
Durchgangswiderstand < 3 mOhm

Werkstoff

Kontakt Messing, vergoldet

Anschluss

Anschlussart/ -bereich Crimp/ 0,35 - 2,5 mm²
- für Isolationscrimp max. Isolation ø4,3 mm
Abisolierlänge 7 mm
Crimpeinstellungen sind individuell zu wählen

Mechanische Werte

Steckzyklen 500

Werkzeuge (nicht im Lieferumfang enthalten)


digitale Crimpzange TE Teile Nr.: C0-0236-000-000
IC Ref. Nr.: C0.236.00

(analoge Crimpzange TE Teile Nr.: C0-0201-000-000
IC Ref. Nr.: C0.201.00)

(Positioniereinsatz für 2 mm Kontakte TE Teile Nr.: C0-0004-000-000
IC Ref. Nr.: C0.004.00)

Crimpmaschine TE Teile Nr.: WA-1672-000-000
IC Ref. Nr.: WA10672

Digitaler Crimpeinsatz, mittel TE Teile Nr.: C0-0373-000-000
IC Ref. Nr.: C0.373.00

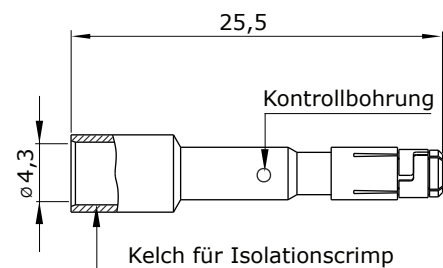

Hauptabmessungen

Kontaktbuchse





Contact Socket 2 mm

for: - 923 Plug, Bulkhead Connector
- 940 Plug, Bulkhead Connector (signal contact)

TE part number: 60-0254-011-000
IC reference number: 60.254.11

Electrical Data

rated current max. 25 A*
contact resistance < 3 mOhm

Material

contact brass, gold plated

Termination

cross-section crimp/ 0.35 - 2.5 mm²
- for insulation crimp max. insulation \varnothing 4.3 mm
stripping length 7 mm
crimp settings select individually

Mechanical Data

mating cycles 500

Tools (not part of product content)


digital crimping tool TE part no.: C0-0236-000-000
IC ref. no.: C0.236.00

(analog crimping tool TE part no.: C0-0201-000-000
IC ref. no.: C0.201.00)

(positioner for 2 mm contacts TE part no.: C0-0004-000-000
IC ref. no.: C0.004.00)

crimping machine TE part no.: WA-1672-000-000
IC ref. no.: WA10672

digital crimp insert, medium TE part no.: C0-0373-000-000
IC ref. no.: C0.373.00

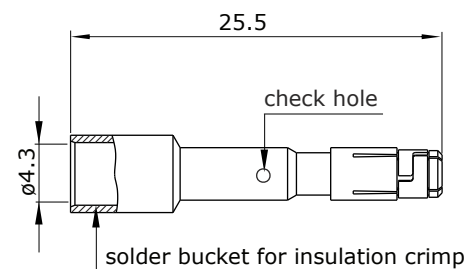

Main Dimension
contact socket

Y6-B540-000-0EN issued: 02.12.2009/Ra; modified: 06.06.2018/KC

© 2018 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Germany
+49 9962 2002 - 0
intercontec@te.com
www.intercontec.biz



* for max. wire cross-section

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [TE CONNECTIVITY](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [8R5006A18A120](#)
[1604232](#) [1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-](#)
[01088](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01032](#) [43-01162](#) [43-10000](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#)
[8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-01338](#) [XS2RD4265](#) [XS2R-](#)
[D426-1](#) [XS8A-0441](#) [859RD04-103R004](#)