

# Kontaktstift $\varnothing 1$ mm

Einsatzbereich: - 923 Kupplung

TE Teile Nr.: 61-0020-011-000  
IC Ref. Nr.: 61.020.11

## Elektrische Werte

Bemessungsstrom  
Durchgangswiderstand

max. 10 A\*  
< 5 mOhm

## Werkstoff

Kontakt

Messing, vergoldet

## Anschluss

Anschlussart/-bereich  
- für Isolationscrimp  
Abisolierlänge  
Crimpeinstellungen

Crimp/ 0,14 - 1,0 mm<sup>2</sup>  
max.  $\varnothing 2,1$  mm  
6 mm  
sind individuell zu wählen

## Mechanische Werte

Steckzyklen

500

**Werkzeuge** (nicht im Lieferumfang enthalten)  
digitale Crimpzange

TE Teile Nr.: C0-0235-000-000  
IC Ref. Nr.: C0.235.00

analoge Crimpzange  
für 1 mm und 2 mm Kontakte

TE Teile Nr.: C0-0201-000-000  
IC Ref. Nr.: C0.201.00


Positioniereinsatz für 1 mm Kontakte

TE Teile Nr.: C0-0009-000-000  
IC Ref. Nr.: C0.009.00

oder

Crimpzange mit Positionierer für 1 mm Kontakte

TE Teile Nr.: C0-0101-000-000  
IC Ref. Nr.: C0.101.00

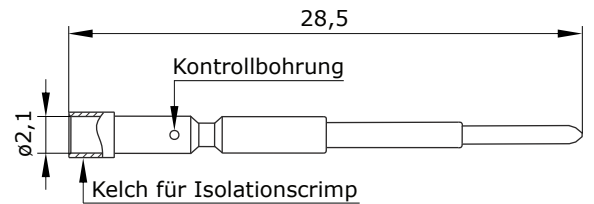

## Hauptabmessungen

Kontaktstift





# Contact Pin $\varnothing$ 1 mm

for: - 923 Extension

**TE part number: 61-0020-011-000**  
**IC reference number: 61.020.11**

## Electrical Data

rated current  
contact resistance

max. 10 A\*  
< 5 mOhm

## Material

contact

brass, gold plated

## Termination

cross-section  
for insulation crimp  
stripping length  
crimp settings

crimp/ 0.14 - 1.0 mm<sup>2</sup>  
max.  $\varnothing$ 2.1 mm  
6 mm  
select individually

## Mechanical Data

mating cycles

500

## Tools (not part of product contents)

digital crimping tool

TE part no.: C0-0235-000-000  
IC ref. no.: C0.235.00

analog crimping tool  
for 1 mm and 2 mm contacts

TE part no.: C0-0201-000-000  
IC ref. no.: C0.201.00


locator for 1 mm contacts

TE part no.: C0-0009-000-000  
IC ref. no.: C0.009.00

or

crimping tool with positioner for 1 mm contacts

TE part no.: C0-0101-000-000  
IC ref. no.: C0.101.00

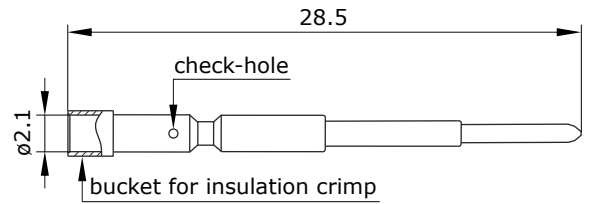

## Main Dimensions

contact pin

Y6-B623-000-00EN issued: 22.12.2009/GSG; modified: 19.11.2018/RN

© 2018 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH  
Bernrieder Straße 15  
94559 Niederwinkling, Germany  
+49 9962 2002 - 0  
[intercontec@te.com](mailto:intercontec@te.com)  
[www.intercontec.biz](http://www.intercontec.biz)



\* for max. wire cross-section

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular Metric Connectors](#) category:*

*Click to view products by [TE CONNECTIVITY](#) manufacturer:*

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)  
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [8R5006A18A120](#)  
[1604232](#) [1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-](#)  
[01088](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01032](#) [43-01162](#) [43-10000](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#)  
[8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-01338](#) [XS2RD4265](#) [RSC 4/9](#)  
[XS2R-D426-1](#) [XS8A-0441](#)