



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - TE Connectivity Ltd. ALL RIGHTS RESERVED.

F

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
J1		REVISED PER ECO-08-020746	21AUG08	HMR	FD
K		REVISED PER ECO-18-000976	13APR2018	RS	JO

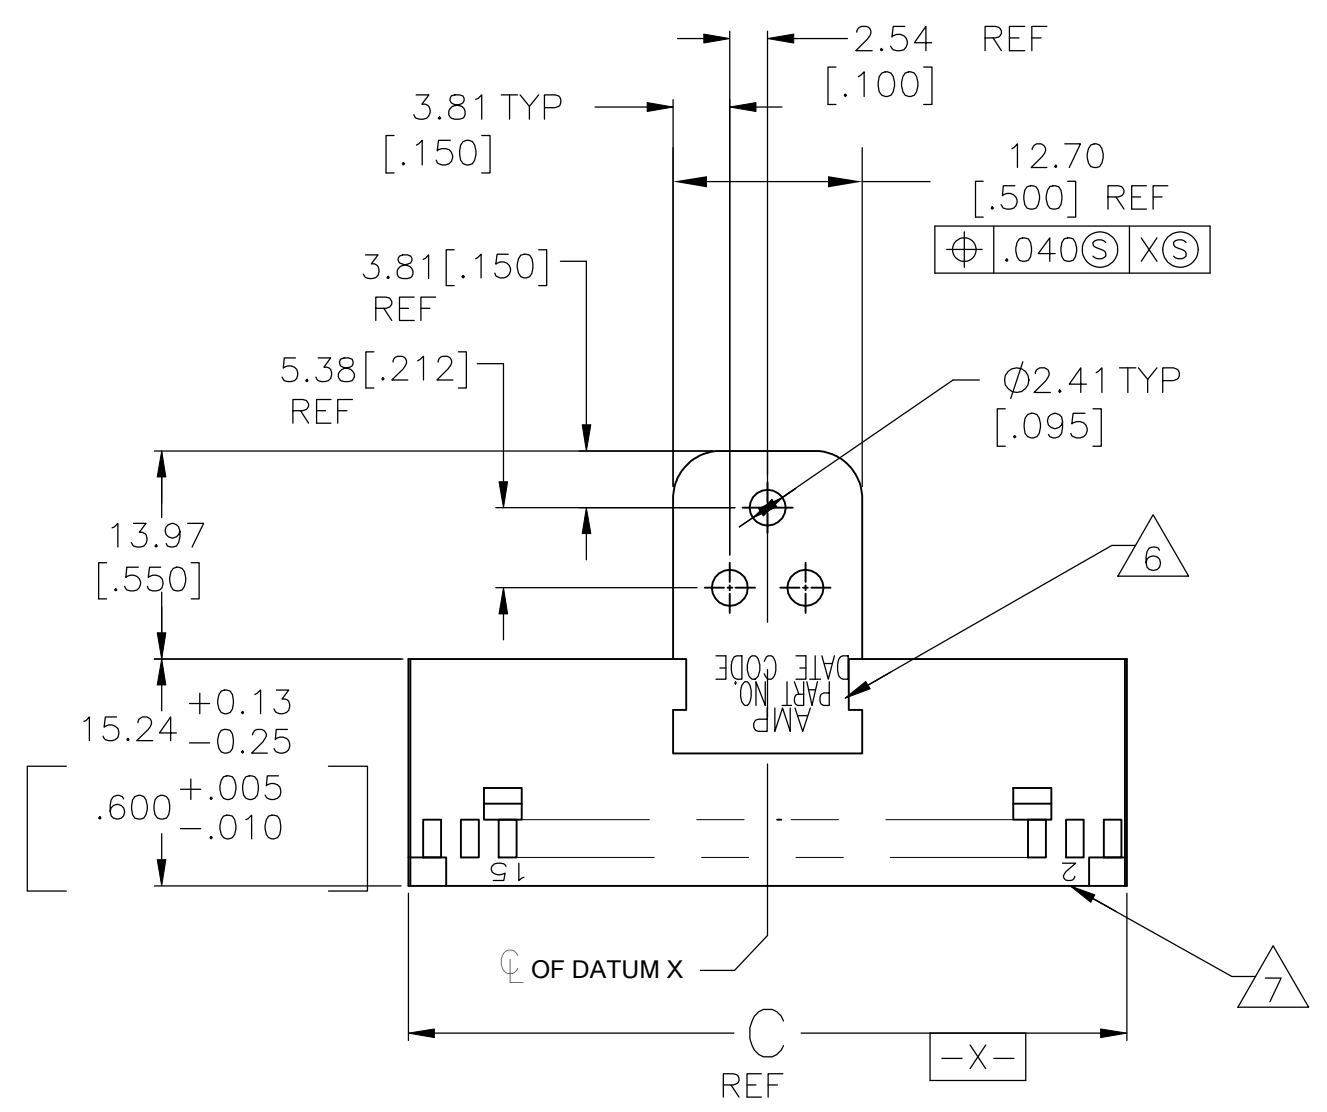

- 1 CAVITY LOCATION DIMENSIONS INCREASE IN INCREMENTS OF 2.54[.100], TOLERANCE NON-CUMULATIVE.
- 2 USE EXTRACTION TOOL 91052-1 TO REMOVE RECEPTACLE CONTACTS.
- 3 THIS HOUSING IS COMPATIBLE WITH MOD II SHROUDED HEADERS.
- 4 HOUSING WILL ACCOMODATE ALL MOD IV, IV.5 AND MOD V CONTACTS.
- 5 OBSOLETE PART NUMBER.
- 6 'AMP', PART NO. AND DATE CODE MARKED AS SHOWN.
- 7 MARK SECOND AND EVERY FIFTH CAVITY, AS SHOWN.

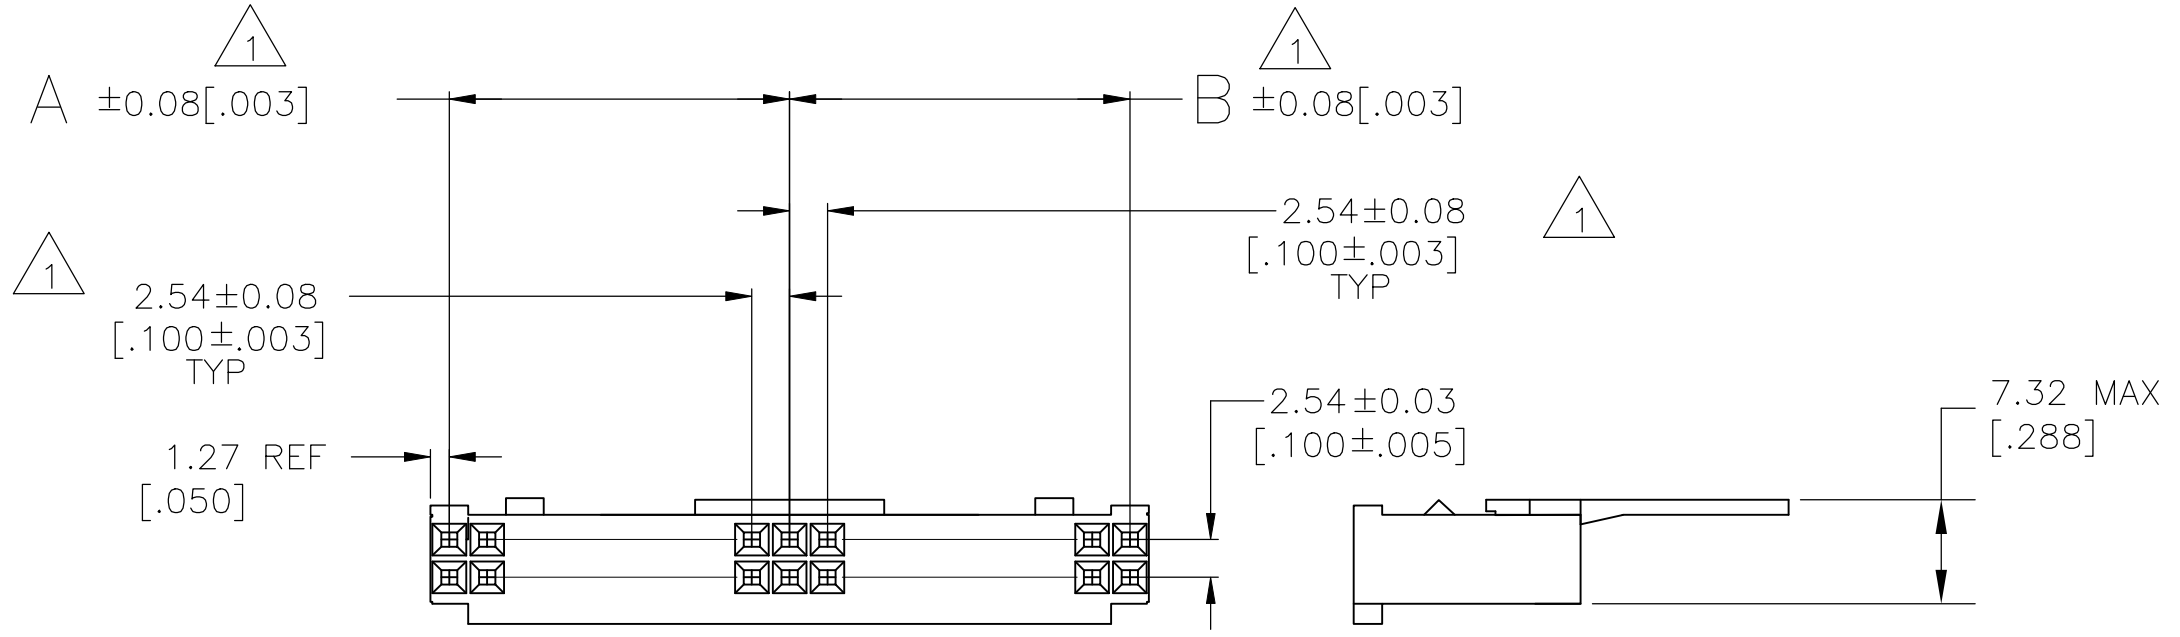

NONE	22.86 [.900]	10.16 [.400]	10.16 [.400]	18	5 1-87922-0
NONE	20.32 [.800]	7.62 [.300]	10.16 [.400]	16	5 87922-9
NONE	17.78 [.700]	7.62 [.300]	7.62 [.300]	14	5 87922-8
NONE	15.24 [.600]	5.08 [.200]	7.62 [.300]	12	5 87922-7
NONE	12.70 [.500]	5.08 [.200]	5.08 [.200]	10	5 87922-6
ALL	22.86 [.900]	10.16 [.400]	10.16 [.400]	18	87922-5
ALL	20.32 [.800]	7.62 [.300]	10.16 [.400]	16	87922-4
ALL	17.78 [.700]	7.62 [.300]	7.62 [.300]	14	87922-3
ALL	15.24 [.600]	5.08 [.200]	7.62 [.300]	12	87922-2
ALL	12.70 [.500]	5.08 [.200]	5.08 [.200]	10	87922-1
MARKING	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN E.BRANDBERG 6-10-94  
 CHK P. SREMCICH 6-10-94

APVD - NAME -

PRODUCT SPEC -  
 APPLICATION SPEC -

MATERIAL MOLDED PARTS: FINISH -

WEIGHT -

CUSTOMER DRAWING

SCALE 2:1 SHEET 1 OF 1 REV K

SIZE A2 CAGE CODE 00779 C-87922

RESTRICTED TO -

TE Connectivity Ltd.

HOUSING ASSY, MOD IV  
 DBL ROW, 2.54[.100]  
 W/ STRAIN RELIEF

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)  
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)