




REVISIONS		DESCRIPTION	DATE	APPROVED
N	22769	REDRAWN TO CAEDS: EDIT DIM'S	93/02/13	WS
P	24162	ITEM #1 P/N WAS -001, ADDED. IT 8	93/06/28	WS
R	30491	REF. ADDED, PROPRIETARY NOTE REMOVED	93/06/28	

NOMINAL VOLTAGE 28 VDC  
 CURRENT RATING-CONTINUOUS 200 AMP  
 15 SEC 1000 AMP  
 1 MIN 500 AMP  
 5 MIN 300 AMP

INTERRUPTING CAPACITY 4500 AMP  
 REVERSE CURRENT SETTING 6-17 AMP  
 OVER A VOLTAGE RANGE 27.5±2.5 VDC  
 CALIBRATED AT 12±1 AMP RC AT 28 VDC & 25±5°C

DIFFERENTIAL VOLTAGE .85±.15 V  
 MAX WEIGHT 2 lbs 15 oz

NOTE:  
 1. THIS UNIT MEETS THE APPLICABLE PORTIONS OF MIL-R-8106  
 2. THIS UNIT SUPERSEDES A-700AQ-1, -3, & -6.

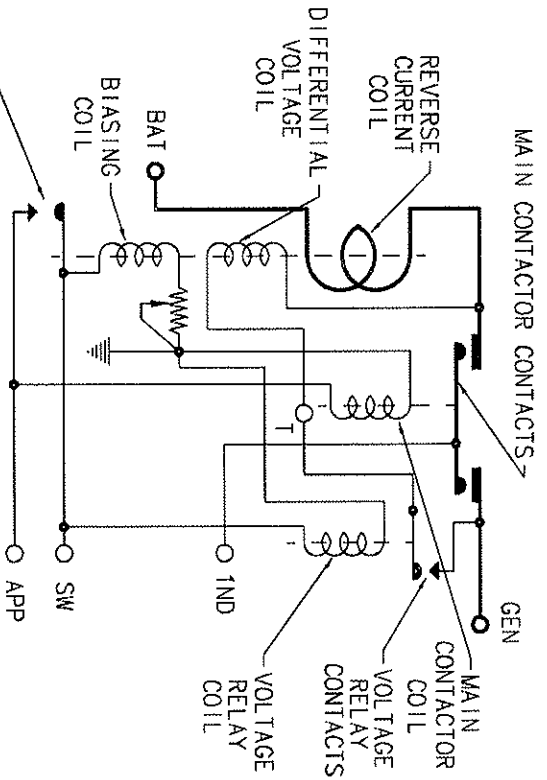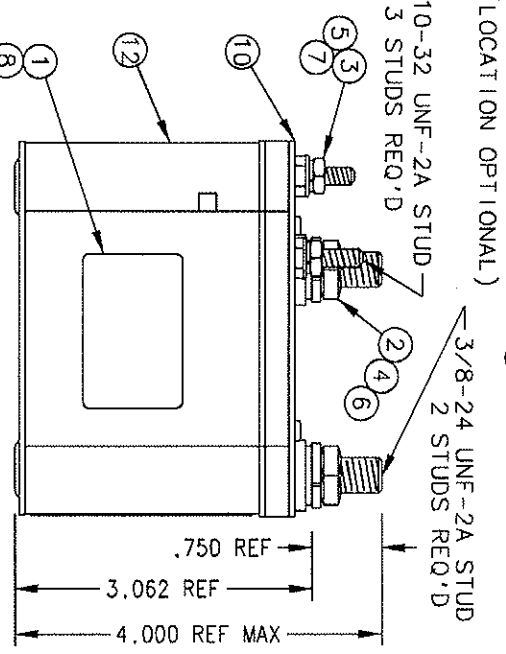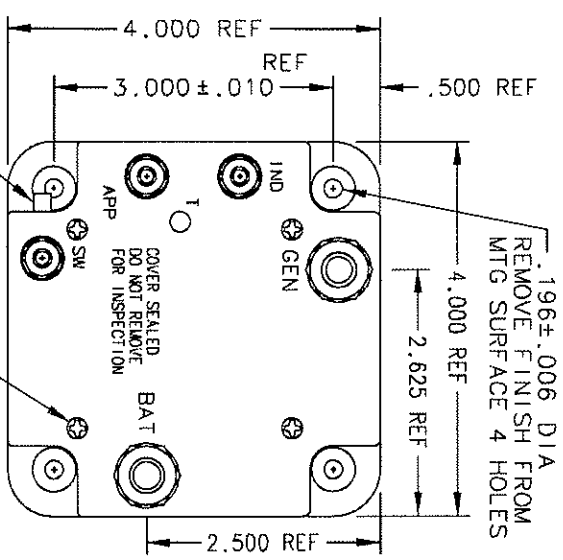

DIFFERENTIAL RELAY CONTACTS WILL OPEN WHEN 'SW' IS DE-ENERGIZED AS WELL AS ON REVERSE CURRENT CONFIGURATION CONTROLLED

QTY	PART OR IDENTIFYING NO.	DESCRIPTION	MATERIAL
12	36451-010	CUTOUT ASSEMBLY PRIMARY	
11			
10	07822-000	PLATE - BASE COVER	
9	51200-020	SCREW No. 4x1/4 BINDING HD	S.S.
8	39529-001	OVERLAY	
7	51712-194	WASHER, FLAT 7/16x13/64x.032	BRASS
6	51704-024	WASHER, FLAT 5/8x.390x.064	BRASS
5	51810-054	WASHER, LOCK #10 SPLIT	BRONZE
4	51807-084	WASHER, LOCK 3/8 SPLIT	BRONZE
3	50410-084	NUT, HEX 10-32x3/8x1/8	BRASS
2	50407-164	NUT, HEX 3/8-24x5/8x7/32	BRASS
1	16043-010	PLATE-NAME	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS OR FRACTIONS	
2 PL DEC. 3 PL DEC. ANGLES	
.062 ± .062	REF
LOCKHEED-GEORGIA P/N 695792-2	
DASH NO.	APPL. ASSY USED ON
APPLICATION	

HARTMAN ELECTRICAL MANUFACTURING MANSFIELD, OHIO  
 CUTOUT - REVERSE CURRENT  
 SIZE CODE IDENT DNG NO. A-700AQ-4  
 SCALE NONE SHEET

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)  
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)  
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)  
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)  
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)  
[7-1393144-5](#) [7-1393767-8](#)