


THIS DRAWING AND THE INFORMATION SET FORTH HEREON ARE THE PROPERTY OF TYCO ELECTRONICS CORPORATION AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUBLICATION, DUPLICATION, DISCLOSURE OR USE FOR ANY PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY TYCO ELECTRONICS CORPORATION IS PROHIBITED.

REVISION

REV	DESCRIPTION	DATE
E	REVISED PER DCR MP03089	4/28/03

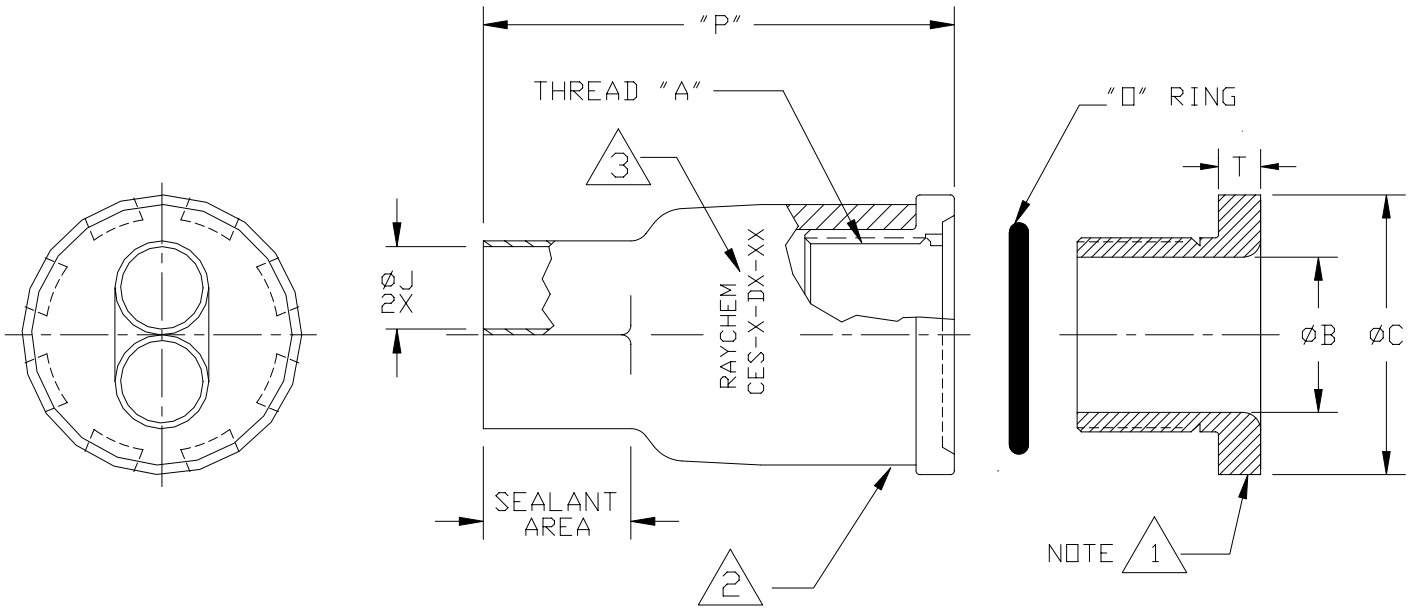

PART NUMBER	"A" THREAD	øB ±.02	øC REF	øJ		P REF REC	T REF	PANEL THK 4
				MIN EXP	MAX REC			
CES-2-D1-XX	1-12 UNF	.75 [19,05]	1.41 [35,56]	.40 [10,16]	.11 [2,79]	2.25 [57,15]	.21 [5,34]	1/4 [6,35]
CES-3-D1-XX	1 3/8-12 UNF	1.10 [27,94]	1.91 [48,52]	.60 [15,24]	.17 [4,32]	3.15 [80,01]	.31 [7,88]	1/4 [6,35]
CES-4-D3-XX	2-8 UN	1.56 [39,62]	2.72 [69,09]	.90 [22,86]	.30 [7,62]	3.75 [92,25]	.31 [7,88]	3/8 [9,65]

NOTES:

1. THE LAST "XX" IN THE PART NUMBER DESIGNATES MATERIAL AS SHOWN BELOW:
 "AL": ALUMINUM 6061 T-6 WITH FINISH OF HARD ANODIZE PER MIL-A-8625, TYPE III, CLASS 2, DYED BLACK.
 "SS": STAINLESS STEEL TYPE 316, WITH FINISH OF PASSIVATE PER QQ-P-35, OR MIL-S-5002 FOR STANDARD BLACK NYLON MATERIAL, OMIT THE LAST "XX" IN THE PART NUMBER.
2. HEAT SHRINKABLE BOOT MATERIAL IN ACCORDANCE WITH -3 POLYOLEFIN
3. PART TO BE MARKED AS SHOWN, REPLACE X'S WITH APPROPRIATE CHARACTERS. (e.g. CES-3-D1-AL).
4. THIS PART IS DESIGNED TO FIT THROUGH A PANEL OR BULKHEAD WITH A MAXIMUM WALL THICKNESS AS INDICATED IN TABLE.
5. FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD.

SPECIFICATION CONTROL DRAWING

tyco Tyco Electronics Corporation
 Electronics 300 Constitution Drive
 Menlo Park, CA. USA 94025

Product Brand: **Raychem**

TITLE
 CABLE ENTRY SEALS
 2 ENTRY, STANDARD

SIZE	CODE IDENT. NO.	DWG. NO.
A	06090	CES-X-DX-XX

DO NOT SCALE THIS DRAWING

SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Shrink Cable Boots & End Caps](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[577159N001](#) [645494-000](#) [CX4132-000](#) [687025-000](#) [705331-000](#) [718446-000](#) [725666N001](#) [729257-000](#) [F27131-000](#) [F85868-000](#) [770-003S106W2](#) [770-013210W1](#) [770-013311](#) [770-013312](#) [806542N001](#) [807507-000](#) [808362-000](#) [808618-000](#) [809125-000](#) [809130-000](#) [809218-000](#) [812014-000](#) [812047-000](#) [813166-000](#) [813767N002](#) [814741-000](#) [819117N001](#) [823026-000](#) [823070-000](#) [841189N001](#) [861471-000](#) [866647-000](#) [879515-000](#) [937577-000](#) [957073-000](#) [982033-2](#) [A77813-000](#) [R280576000](#) [D96192-000](#) [163549-000](#) [EN3BOOTLKIT](#) [MTPSRBCL-C](#) [1954015-1](#) [200W531-3-0](#) [202A163-4-0-CS5067](#) [202A343-3-00-0](#) [202B221-13-0](#) [202B231-13-0](#) [202B563-25-07-0](#) [202C241-13-0](#)