

REV. C
DCO 300855

TOLERANCES $\pm .010$ " - UNLESS OTHERWISE SPECIFIED


COIL: @ 25°C
 RESISTANCE _____ CURRENT: 30mA MAX.
 NOMINAL VOLTAGE _____ 115 VAC - 50/400Hz
 MUST OPERATE _____ 70.0 VAC MAX., 50/400Hz

 MUST RELEASE _____ 25.0 VAC MAX., 8.0 VAC MIN., 50/400 Hz

ENVIRONMENT:
 VIBRATION _____ 33 _____ Hz TO _____ 3000 _____ Hz @ _____ 30 _____ g's
 SHOCK _____ 200 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -70 _____ °C TO _____ +125 _____ °C

NOTES: OPERATE TIME 15 mS MAX.
 RELEASE TIME 50 mS MAX.
 CONTACT BOUNCE 1 mS MAX.

CUSTOMER DATA SHEET

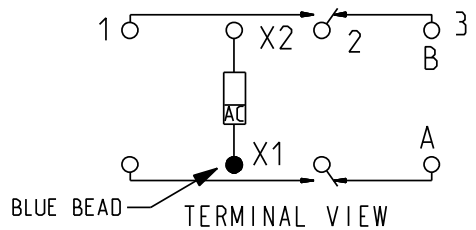

CONTACT RATING: _____
 10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE.
 100,000 OPERATIONS

DR. B.D. 07MAR2008 | CK. J.M.B. 5/14/08

Tyco Electronics ©COPYRIGHT 2005
 TYCO ELECTRONICS CORPORATION
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. _____ CATALOG ITEM _____
 CUST. NO. _____ REV. _____

TE NUMBER
1617752-2

CII PART NUMBER
FCA-210-CX9

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-1423698-4](#) [6-](#)
[1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616349-9](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1618107-9](#) [6-1618248-4](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#) [7-1393767-8](#) [7-1414968-8](#) [7-](#)
[1419130-3](#) [7-1608047-2](#)