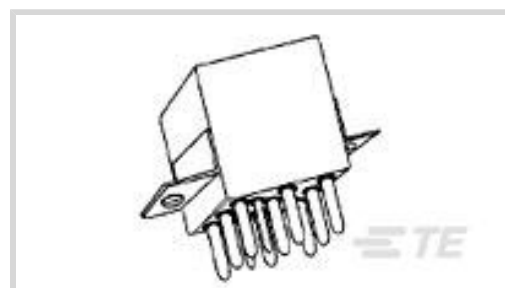




Relays, Contactors & Switches > Relays > Mil-Aero Relays > Mid-Range Relays



Mid-Range Relay Contact Arrangement: **3 Form C, 3PDT, 3 C/O**

Coil Suppression Diode: **With**

Auxiliary Contacts: **Without**

Terminal Plating: **Tin-Lead**

Mid-Range Relay Contact Current Rating: **25 A**

### Features

#### Product Type Features

Enclosure Type	Hermetically Sealed
Terminal Configuration	Solder Pins
Product Type	Relay
Relay Type	Military/Aerospace Mid-Range

#### Electrical Characteristics

Vibration	30G's, 33 – 3000Hz
Shock	200G's, 6ms
Coil Suppression Diode	With
Mid-Range Relay Coil Voltage Rating	28 VDC
Mid-Range Relay Coil Resistance	290 Ω
Back EMF Suppression	With
Coil Magnetic System	Polarized, Monostable
Actuating System	DC

#### Contact Features

Mid-Range Relay Contact Arrangement	3 Form C, 3PDT, 3 C/O
Auxiliary Contacts	Without
Terminal Plating	Tin-Lead
Mid-Range Relay Contact Current Rating	25 A



Contact Base Material	Silver Cadmium Oxide
-----------------------	----------------------

**Mechanical Attachment**

Mid-Range Relay Mounting Type	No Brackets
-------------------------------	-------------

**Usage Conditions**

Operating Temperature Range	-70 – 125 °C
-----------------------------	--------------

**Product Compliance**

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Not Compliant
------------------------------	---------------

EU ELV Directive 2000/53/EC	Not Compliant
-----------------------------	---------------

China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
---	--------------------------------------

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---






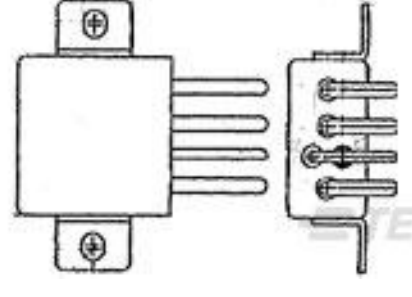









Solder Process Capability	Not lead free process capable
---------------------------	-------------------------------

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

**Compatible Parts**



 <p>TE Part # 2-1617748-0 FCA-125-14=M6106/19-014</p>	 <p>TE Part # 6-1617748-1 FCA-125-AY4</p>	 <p>TE Part # 1-1617748-6 FCA-125-10=M6106/19-010</p>	 <p>TE Part # 5-1617791-1 FCA-125-3702L=M83536/37-002L</p>
 <p>TE Part # 7-1617748-5 FCA-125-CX4</p>	 <p>TE Part # 1617790-5 FCA-125-HX4=RELAY</p>	 <p>TE Part # 4-1617748-6 FCA-125-5=M6106/19-005</p>	 <p>TE Part # 2-1617748-5 FCA-125-19=M6106/19-019</p>
 <p>TE Part # 5-1617791-2 FCA-125-3703L=M83536/37-003L</p>	 <p>TE Part # 5-1617819-2 FCA-125-AX2</p>	 <p>TE Part # 4-1617791-6 FCA-125-3605L=M83536/36-005L</p>	 <p>TE Part # 5-1617748-4 FCA-125-7=M6106/19-007</p>
 <p>TE Part # 9-1617798-1 FCA-125-BZ2=25 AMP SPDT RELAY</p>	 <p>TE Part # 6-1617748-8 FCA-125-BZ1</p>	 <p>TE Part # 8-1617748-3 FCA-125-CY9</p>	

Also in the Series | CII FCA-325 Series

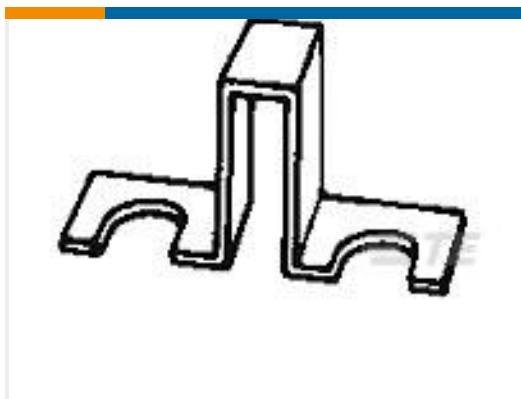


Mid-Range Relays(30)

Customers Also Bought



TE Part #1662-213-2031  
CONT SOC ASSY



TE Part #1776058-1  
Over-the-Barrier Jumper, .437 CL



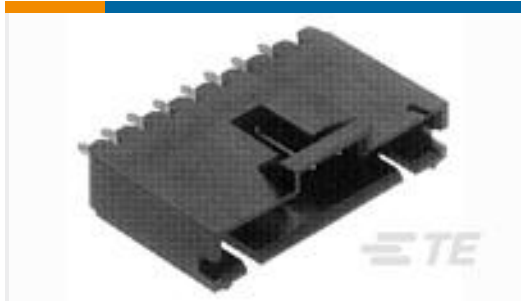
TE Part #1623158-1  
CRG0805 1% 22R



TE Part #YDTS26W25-04PNV001  
PLUG ASSY



TE Part #1757827-2  
AMPLIMITE,PLUG ASY,POSTD,109,ZN,  
2



TE Part #103638-4  
05 MTE HDR SRST LATCH .100CL



TE Part #1757828-2  
AMPLIMITE,RCPT ASY,POSTD,109,ZN,  
2



TE Part #1757828-5  
AMPLIMITE,RCPT ASY,POSTD,109,ZN,  
5

## Documents

### Product Drawings

[FCA-325-BZ4](#)

English

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_5-1617753-0\\_B.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_5-1617753-0\\_B.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_5-1617753-0\\_B.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[5-1773450-5\\_sec5\\_FCA-325](#)

English

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Industrial Relays](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[6-1617801-8](#) [6-1618107-9](#) [7-1618273-3](#) [EV250-4A-02](#) [EV250-6A-01](#) [FCA-125-CX8](#) [FCA-325-159](#) [FCA-410-138](#) [8000-S3121](#) [8-1618273-6](#)  
[8-1618393-1](#) [GCA63A220VAC60HZ](#) [GCA63A277VAC60HZ](#) [GCA63A600VAC60HZ](#) [1-1672275-3](#) [1-1833005-4](#) [H-16/S1](#) [A711Z](#) [H-8C](#)  
[H-8/S11](#) [H-8/S68](#) [ACC530U20](#) [ACC730U30](#) [RF303ZM4-12](#) [DH18DA](#) [1423675-8](#) [AR4-15F13-C01](#) [AR7-41F11](#) [AVR907](#) [15732A200](#)  
[B07B032AC1-0329](#) [B329](#) [B490A](#) [1618279-1](#) [BHR124Y](#) [1810DDB-SX](#) [N417](#) [P30C42A12D1-120](#) [2-1617748-6](#) [2-1618375-1](#) [2-1618396-6](#)  
[2-1618398-1](#) [JMAPD-5XL](#) [JMGACD-5M](#) [JMGSC-5LW](#) [JMGSCD-5L](#) [PBO-18A1218](#) [PBO-40A3040](#) [K8DSPH1200480VAC](#) [KA-3C-12A](#)