



## GA100K6MCD1 MICRO BetaCHIP (MCD) THERMISTOR PROBES

100K Ohms Resistance @25°C

0.2°C Tolerance @ 25°C

Thermally Conductive Epoxy Coating

38 AWG Solid Nickel Bifilar with Polyester Type Insulation

Fast Time Response

Small Tip Diameter

RoHS Compliant

Micro BetaCHIP (MCD) thermistor probes are suited for applications that require rapid temperature response and where space is limited. These NTC thermistors are potted in a polyimide tube with a thermally conductive epoxy.

### FEATURES


- $\pm 0.2^\circ\text{C}$  tolerance @ +25°C
- Custom tolerances available
- Smaller than miniature BetaCURVE devices
- Rapid time response (200 milliseconds in liquids)
- Temperature range -40°C to +125°C

### APPLICATIONS

- Low volume flow sensors (liquids or gases)
- Laboratory animal research
- Peltier temperature tracking sensors
- Temperature control for bath showers
- DNA research sensors
- Medical catheters

**GA100K6MCD1  
MICRO BetaCHIP (MCD) THERMISTOR PROBES**

**MECHANICAL DETAILS**

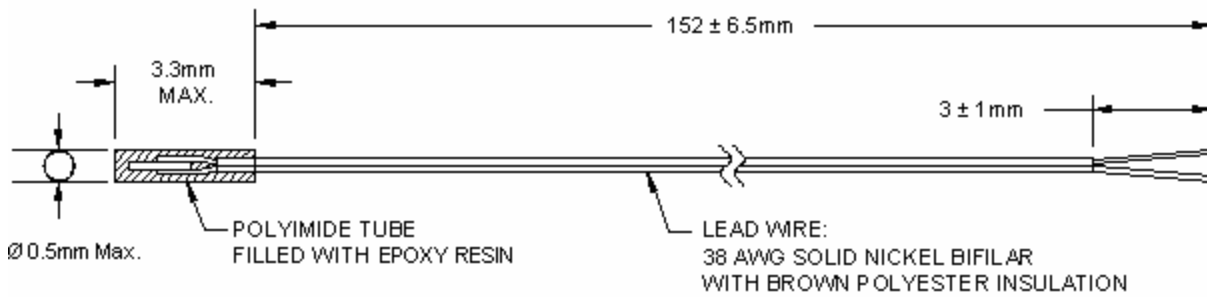

**PERFORMANCE SPECS**

Parameters	Units	Value
Nominal Resistance at +25°C	Ohms	100,000
Resistance Tolerance at +25°C	°C	±0.2
Alpha Value at +25°C	%/°C	-4.39
Beta Value 25/85	K	4261
Tolerance on Beta Value 25/85	%	±0.5
Time Response in Liquids	milliseconds	200
Dissipation Constant in Still Air	mW/°C	0.3

**RESISTANCE V TEMPERATURE TABLE**

Temp. °C	Ohms
-40	4071186
-39	3798837
-38	3546330
-37	3312107
-36	3094743
-35	2892930
-34	2705469
-33	2531260
-32	2369292
-31	2218639
-30	2078448
-29	1947934
-28	1826376
-27	1713112
-26	1607529
-25	1509065
-24	1417202
-23	1331461
-22	1251401
-21	1176615
-20	1106727
-19	1041391
-18	980285
-17	923112
-16	869600
-15	819493
-14	772557
-13	728575
-12	687344
-11	648680
-10	612407
-9	578366
-8	546408
-7	516394
-6	488196
-5	461695
-4	436779
-3	413346
-2	391300
-1	370551
0	351017
1	332620

Temp. °C	Ohms
2	315288
3	298954
4	283555
5	269034
6	255335
7	242408
8	230206
9	218684
10	207801
11	197518
12	187799
13	178610
14	169921
15	161700
16	153921
17	146558
18	139586
19	132983
20	126727
21	120799
22	115179
23	109850
24	104795
25	<b>100000</b>
26	95449
27	91129
28	87027
29	83131
30	79430
31	75913
32	72569
33	69390
34	66367
35	63491
36	60755
37	58150
38	55670
39	53309
40	51060
41	48917
42	46875
43	44929

Temp. °C	Ohms
44	43073
45	41303
46	39615
47	38005
48	36467
49	35000
50	33599
51	32262
52	30984
53	29763
54	28596
55	27481
56	26415
57	25395
58	24420
59	23487
60	22594
61	21740
62	20922
63	20138
64	19388
65	18670
66	17981
67	17322
68	16689
69	16083
70	15502
71	14945
72	14410
73	13897
74	13405
75	12932
76	12478
77	12043
78	11625
79	11223
80	10837
81	10466
82	10109
83	9767
84	9437
85	9121

Temp. °C	Ohms
86	8816
87	8523
88	8241
89	7970
90	7708
91	7457
92	7215
93	6982
94	6758
95	6541
96	6333
97	6132
98	5939
99	5753
100	5573
101	5400
102	5232
103	5071
104	4916
105	4766
106	4621
107	4481
108	4346
109	4216
110	4090
111	3969
112	3852
113	3738
114	3629
115	3523
116	3421
117	3322
118	3227
119	3134
120	3045
121	2959
122	2875
123	2794
124	2716
125	2640

# GA100K6MCD1 MICRO BetaCHIP (MCD) THERMISTOR PROBES

## ORDERING INFORMATION

Part Number	Description	$\Omega$ @25°C	MOQ*
GA100K6MCD1	Micro BetaCHIP thermistor probe (MCD)	100,000	1,000

\* For quantities less than MOQ (Minimum Order Quantity) contact distribution

**NORTH AMERICA**  
Tel +1 800 522 6752  
[customer-care.ando@te.com](mailto:customer-care.ando@te.com)

**EUROPE**  
Tel +31 73 624 6999  
[customer-care.glwy@te.com](mailto:customer-care.glwy@te.com)

**ASIA**  
Tel +86 0400 820 6015  
[customer-care.chdu@te.com](mailto:customer-care.chdu@te.com)

### [te.com/sensorsolutions](http://te.com/sensorsolutions)

BetaCURVE, BetaCHIP, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, products and/or company names referred to herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [NTC \(Negative Temperature Coefficient\) Thermistors](#) *category:*

*Click to view products by* [TE Connectivity](#) *manufacturer:*

Other Similar products are found below :

[118-253FAJ-P01](#) [121-202EAC-P01](#) [123-802EAJ-P01](#) [128-105NDP-Q02](#) [135-503LAD-J01](#) [B57250V2104F360](#) [B57250V2473F560](#)  
[B57620C472K962](#) [NTCLE410E3103F](#) [A1004SG22P0](#) [199-303KAF-A02](#) [30054-4](#) [M09N038F](#) [B57423V2473H062](#) [B57471V2474H062](#)  
[B57620C5223J062](#) [500-52AA04-101](#) [526-31AA19-104](#) [526-31AN12-202](#) [103AT-5-1P-FT](#) [10K3A542I](#) [112-103FAG-H02](#) [112-104KAG-](#)  
[B01](#) [11028414-00](#) [111-182CAG-H01](#) [112-103FAF-H01](#) [112-104KBF-F01](#) [118-202CAJ-P01](#) [526-31AA79-102](#) [B57442V5103J62](#)  
[B57401V2103H62](#) [B57621C5472J62](#) [11032565-00](#) [194303KEVA01](#) [NTCACAPE3C90193](#) [USP11595](#) [B57359V2224J260](#)  
[B57343V5103J360](#) [50070974-003-01](#) [189-602LDR-A01](#) [B57621C5472K062](#) [135-105QAF-J02](#) [B57421V2153J062](#) [B57230V2103H260](#)  
[B57471V2684H062](#) [B57471V2333H062](#) [126-153YJC-B01](#) [NTCS0603E3333FHT](#) [118-802EAJ-P01](#) [121-103FAC-Q02](#)