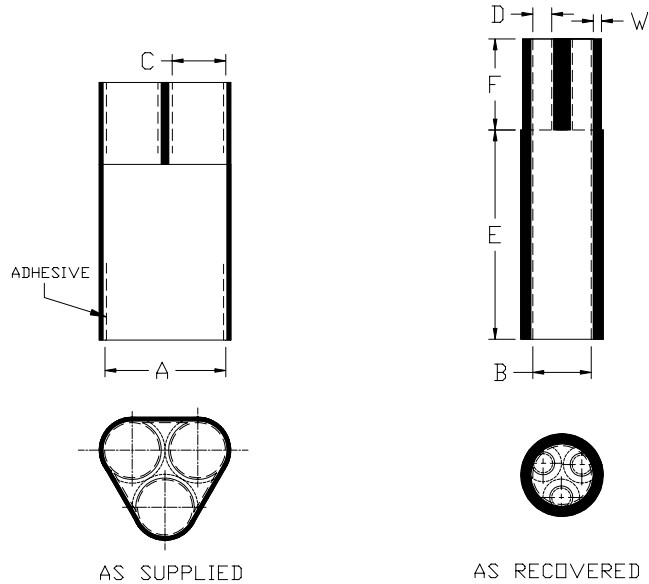


## CABLE BREAKOUT BOOTS, THREE ENTRY



**Table of Dimensions, inch (mm):**

PART NUMBER (See Note*)	BODY ID		LEG ID		Length Recovered Min		Rec'd. Wall Thickness Ref (W)
	Exp. (A), Min	Rec'd. (B), Max	Exp. (C), Min	Rec'd. (D), Max	(E), Body	(F), Leg	
T3-9FR	0.90 (23)	0.36 (9)	0.33 (8)	0.12 (3)	2.0 (51)	0.7 (18)	0.04 (1.0)
T14-23FR	1.20 (30)	0.69 (18)	0.50 (13)	0.18 (5)	2.3 (58)	1.0 (25)	0.09 (2.3)
T23-50FR	1.20 (30)	0.69 (18)	0.50 (13)	0.18 (5)	2.3 (58)	1.0 (25)	0.09 (2.3)
T42-100FR	1.70 (43)	0.90 (23)	0.82 (21)	0.30 (8)	2.3 (58)	1.2 (30)	0.12 (3.0)
T60-150FR	1.70 (43)	0.90 (23)	0.82 (21)	0.30 (8)	2.3 (58)	1.2 (30)	0.12 (3.0)
T150-300FR	2.40 (61)	1.40 (36)	1.25 (32)	0.50 (13)	3.5 (89)	1.6 (41)	0.12 (3.0)
T200-400FR	2.40 (61)	1.40 (36)	1.25 (32)	0.50 (13)	3.5 (89)	1.6 (41)	0.12 (3.0)
T-400FR	3.20 (81)	2.00 (51)	1.40 (36)	0.75 (19)	3.5 (89)	1.6 (41)	0.14 (3.6)
T500-600FR	4.90 (124)	2.32 (59)	2.00 (51)	1.00 (25)	7.5 (191)	2.2 (56)	0.12 (3.0)

**Note\*:** Add "NA" to the end of Part Number if no adhesive is required

**Material:** Heat shrinkable boot material in accordance with -3 polyolefin

**Factory applied sealant:** Factory applied hot melt adhesive is standard.

### CUSTOMER DRAWING

		<b>Raychem Molded Parts</b> 305 Constitution Drive, Menlo Park, CA 94025		TITLE:			
				<b>CABLE BREAKOUT BOOT, THREE ENTRY</b>			
Unless otherwise specified dimensions are in inches. [Metric dimensions are shown in brackets]				DOCUMENT NO.:			
				<b>TXXX-XXXFR</b>			
Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.				REV:			
				G			
REVISD BY:		CAGE CODE:	Org. Date:	ECO #:	FILE :	SIZE	SHEET:
UNGUYEN		06090	5/7/07	09-019755	TXXX-XXXFR.doc	A	1 of 1

© 2003-2009 Tyco Electronics Corporation. All rights reserved

If this document is printed it becomes uncontrolled. Check for the latest revision.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Heat Shrink Cable Boots & End Caps](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[577159N001](#) [645494-000](#) [CX4132-000](#) [687025-000](#) [705331-000](#) [718446-000](#) [725666N001](#) [729257-000](#) [F27131-000](#) [F85868-000](#) [770-003S106W2](#) [770-013210W1](#) [770-013311](#) [770-013312](#) [806542N001](#) [807507-000](#) [808362-000](#) [808618-000](#) [809125-000](#) [809130-000](#) [809218-000](#) [812014-000](#) [812047-000](#) [813166-000](#) [813767N002](#) [814741-000](#) [819117N001](#) [823026-000](#) [823070-000](#) [841189N001](#) [861471-000](#) [866647-000](#) [879515-000](#) [937577-000](#) [957073-000](#) [982033-2](#) [A77813-000](#) [R280576000](#) [D96192-000](#) [163549-000](#) [EN3BOOTLKIT](#) [MTPSRBCL-C](#) [1954015-1](#) [200W531-3-0](#) [202A163-4-0-CS5067](#) [202A343-3-00-0](#) [202B221-13-0](#) [202B231-13-0](#) [202B563-25-07-0](#) [202C241-13-0](#)