

order number: J80029A0500

STX M12x1 CS X-coded Cat.6_A, CS8X180-3-5IDC533FA000

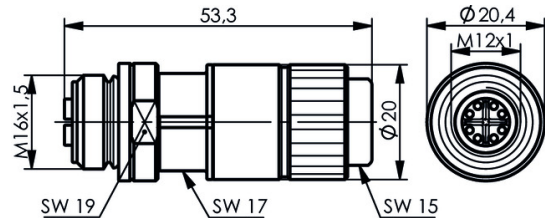


Fig. may differ

Technical Attributes	
Description	STX M12x1 CS X-coded Cat.6 _A
Short name	CS8X180-3-5IDC533FA000
Type	8 pole, X-coded, straight, plug set, 360° shielding, IDC, plug length: 53,3 mm, field assembly

Mechanical Characteristics	
Insertion force	≤ 30 N
Durability (Matings)	≥ 100
Core Diameter	0,9 - 1,6 mm
Cu-Conductor diameter: stranded	0.46 - 0.76 mm (AWG27 - 22/7)
Cu-Conductor diameter: solid	0.51 - 0.64 mm (AWG24 - 22/1)
Material: housing	zinc diecast nickel plated / brass nickel plated
Material: wire pair presorting	PA UL94 V0
Material: shield	German silver
Material: pressure screw	brass nickel-plated
Material: contacts	brass
Material: contact finish	Au over Ni

Electrical Characteristics	
Contact resistance	≤ 10 MΩ
Insulation resistance	≥ 100 MΩ
Voltage proof: contact-contact	≥ 500 V, DC
Voltage proof: contact-shield	≥ 500 V, DC
PoE+ acc to IEEE 802.3at	Adequate for Power over Ethernet+

Standards	
Connectors	IEC 61076-2-109

Shock	50 g
Protection against particulate ingress	IP6X
Protection against water / immersion	IPX7
Ambient temperature	-40° C to +85° C

10 Gigabit Ethernet acc. to IEEE 802.3an	Adequate for 10 Gigabit Ethernet
Category 6 _A	ISO/IEC 11801; DIN EN 50173-1
Class E _A	ISO/IEC 11801; DIN EN 50173-1
Category 6A	ANSI/TIA/EIA-568-C.2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [telegartner](#) manufacturer:

Other Similar products are found below :

[J01040A0602](#) [J01008A0824](#) [J01010A0035](#) [J00026A3001](#) [J00026A4004](#) [J00026A5002](#) [J01151A0491Z](#) [J80029A0500](#) [L84611A0000](#)
[L84613A0000](#) [L84614A0000](#) [L84615A0000](#) [J01027A0023](#) [J01420A0065](#) [J01010A0023](#) [J01010A2255](#) [J01028A0033](#) [J01150A0588](#)
[J00026A3000](#) [J00026A3002](#) [J00026A3003](#) [J00026A4002](#) [J01021A0147](#) [J01151R0021](#) [J01027A0029](#) [J01440A0011](#) [J01010A0051](#)
[J01040A0010](#) [J01010A0037](#) [J00026A5001](#) [J01005A1238](#) [J80026A0200](#) [J01151A0741](#) [J01042A0637](#) [J01001A1265](#) [J01040B0602](#)
[J80026A0100](#) [J01010A0022](#) [J01011A2287](#) [J01020A0097](#) [J01020A0119](#) [J01020A0127](#) [J01122C0014](#) [J00026A4001](#) [J01008A0059](#)
[J01150A0061](#) [J80029A0310](#) [J01440A0005](#) [J01440A0024](#) [J01161A0691](#)