



1 2 3 4 5 6 7 8




Mating face according to IEC 61076-2-101

Tolerance:
X.X ±0.25
X.XX ±0.10
X.XXX ±0.050
Angle:±1.0°


Mark	Qty	Engineering Change Area




Mating face according to IEC 61076-2-101

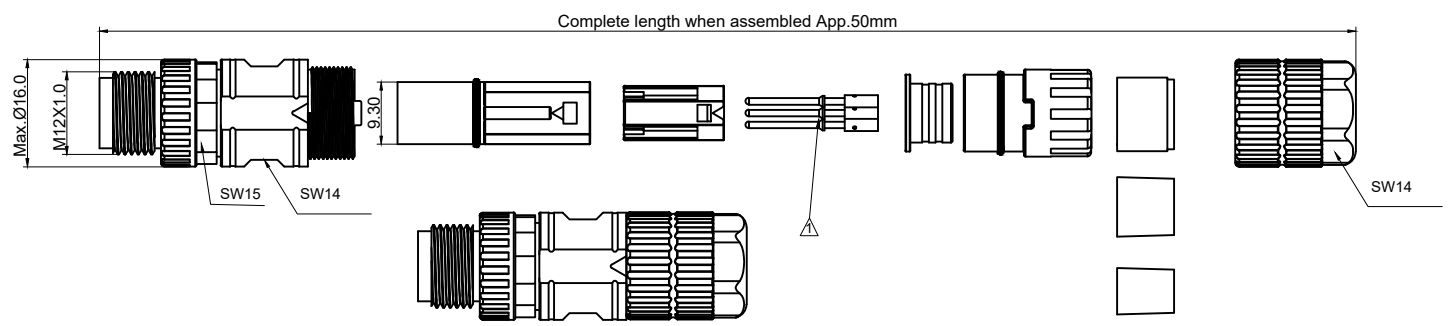

- Technical requirement
- 1.Rated current:3P-5P 4A
 - 2.Rated voltage:3P-4P 250V,5P 60V
 - 3.Rated impulse voltage:3P-4P 2.5KV,5P 1.5KV
 - 4.Contact resistance:<15mΩ
 - 5.Insulation resistance:≥10⁸Ω
 - 6.Pullution degree:3(when mated)
 - 7.Temperature range:-40°C - +85°C
 - 8.Degree of protection:IP65/IP67
 - 9.Voltage proof:3P-4P 1.4KV,5P 1.0KV between contacts and between contact and housing.
 - 10:Matting cycle:500cycles.
 - 11:Tightening torque:0.6N.m



△Contacts should be ordered separately

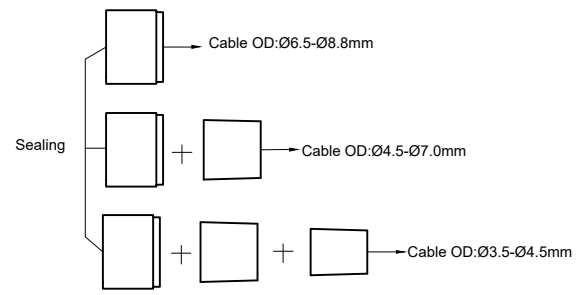

P/N	Description	ØD±0.03(mm)	Wire Cross Section(mm ²)	Strip Length(mm)
61064807	C12A-M10-033	Ø0.88	0.09-0.33mm ² 28AWG-22AWG	4mm
61065107	C12A-M10-082	Ø1.34	0.33-0.82mm ² 22AWG-18AWG	4mm

 All dimensions are in mm			Material:														
			Finishing:														
<table><tr><td>Signature</td><td>Date</td></tr><tr><td>Created by</td><td></td></tr><tr><td>Checked by</td><td></td></tr><tr><td>Approved by</td><td></td></tr><tr><td>State</td><td></td></tr></table>			Signature	Date	Created by		Checked by		Approved by		State		Phase Marking	Weight	Scale	拓宜(上海)工控电器设备有限公司 Topone(Shanghai) Industrial Control Electrical Equipment Co., LTD.	
			Signature	Date													
Created by																	
Checked by																	
Approved by																	
State																	
		1:1															
			P/N	61067207		Part Name: C12A-MSA-5C SH											
			MD/CD			Rev. 00	Page: 1 OF 1										

1 2 3 4 5 6 7 8

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Circular Connector](#) category:

Click to view products by [Toponelec](#) manufacturer:

Other Similar products are found below :

[600273N007](#) [6134-336-13149](#) [6134-337-11149](#) [6134-337-2390](#) [6134-341-17149](#) [67-02E12-60PX](#) [680-SMG](#) [CXS3102A181S](#)
[D38999/20FC8SA L/C](#) [75-190216-08S](#) [75-190611-03S](#) [75-474014-05S](#) [75-474618-04S](#) [75-474620-07P](#) [799539-000](#) [805-005-07NF11-19PC](#)
[805-005-07NF15-7PA](#) [FMP.2M.310.XLCT](#) [836783-1](#) [862256-1](#) [866857-1](#) [867865-1](#) [PT08P-14-19S](#) [PT08P-14-5S](#) [QCM019PC2DC012B](#)
[121583-0217](#) [121667-0020](#) [RD10A16-19-P6CS051/1](#) [RD16A14-12-S6CS051/2](#) [1301240268](#) [1301240275](#) [1301860906](#) [DCU-08BFEA-](#)
[LL7001](#) [RM15WTP-CP\(5\)\(71\)](#) [14482](#) [16283-18](#) [1877910-1](#) [206039-3](#) [206323-1](#) [207002-2](#) [207682-1](#) [CA06COME14SA7P](#) [211777-1](#) [JL04-](#)
[1012CK\(05\)-R](#) [JL04V-2A28-11PE-R](#) [JL04V-2E10SL-3PE-B-R](#) [JL04V-2E20-15PE-B-R](#) [JL04V-2E20-4PE-B-R](#) [JL04V-6A24-11SE-EB-R](#)
[JN1AS04MK1X](#)