



1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical
 Temperature Range—Operating: -25°C~+85°C
 Material
 Housing: PA66(UL 94V-0)
 Applicable Terminal: FT12501
 Mates With (Housing): FHG12508 Series
 Mates With(Wafer): FWF12504,FWF12505,FWF12506,FWF12507 Series

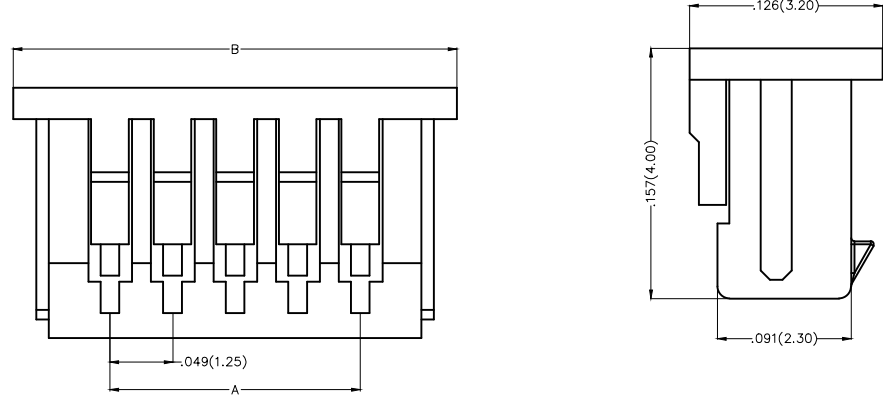

Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
2	FHG12502-S02M2W1B	.049(1.25)	.167(4.25)
3	FHG12502-S03M2W1B	.098(2.50)	.217(5.50)
4	FHG12502-S04M2W1B	.147(3.75)	.266(6.75)
5	FHG12502-S05M2W1B	.197(5.00)	.315(8.00)
6	FHG12502-S06M2W1B	.246(6.25)	.364(9.25)
7	FHG12502-S07M2W1B	.295(7.50)	.413(10.50)
8	FHG12502-S08M2W1B	.344(8.75)	.463(11.75)
9	FHG12502-S09M2W1B	.394(10.00)	.512(13.00)
10	FHG12502-S10M2W1B	.443(11.25)	.561(14.25)
11	FHG12502-S11M2W1B	.492(12.50)	.610(15.50)
12	FHG12502-S12M2W1B	.541(13.75)	.659(16.75)
13	FHG12502-S13M2W1B	.591(15.00)	.709(18.00)
14	FHG12502-S14M2W1B	.640(16.25)	.757(19.25)
15	FHG12502-S15M2W1B	.689(17.50)	.807(20.50)
16	FHG12502-S16M2W1B	.738(18.75)	.856(21.75)

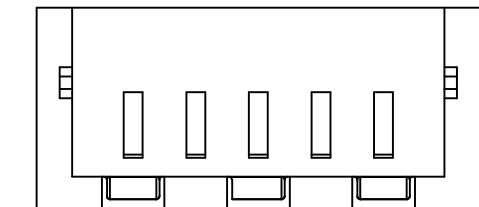

Ordering Information

FHG 125 02 — S XX M 2 W1 B
 1 2 3 4 5 6 7 8 9

1 Category FHG—Housing	2 Series Number 125—Pitch1.25mm	3 Distinction No. 02	4 Row Option S—Single Row	5 Circuits XX
6 Entry Type M—Male	7 Material—Resin 2—PA66	8 Color—Resin W1—White	9 Packaging B—PE Bag	

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUN/13	PART NO. FHG12502-SXXM2W1B	ITEM NO. FHG12502	 Leader Of Industry	
	X.±.012(0.30)	X.'±5'	CHECKED BY JACOB	DATE 25/JUN/13	TITLE Wire to Board Pitch 1.25mm(Housing)			REV 0
	DESIGN UNITS Inch (metric)	X.X±.008(0.20)	X'±2'	DRAWN BY CHERRY	DATE 25/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

1 2 3 4 5 6 7 8

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TXGA](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)