

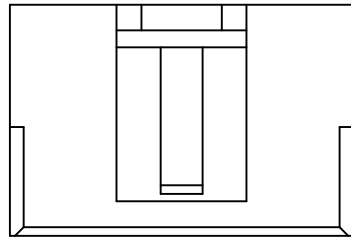


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Notes

1. Material: PA66 UL94V-2
2. Temperature Range-Operating: -25°C ~ +85°C
3. Applicable Terminal: FT39601-F2H
4. Mates With: FWF39601, FWF39602, FWF39605 Series.

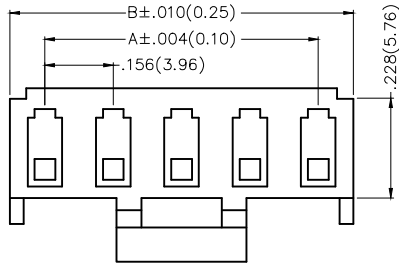

Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
2	FHG39601-S02M2W1B	.156(3.96)	.325(8.25)
3	FHG39601-S03M2W1B	.312(7.92)	.481(12.21)
4	FHG39601-S04M2W1B	.468(11.88)	.637(16.17)
5	FHG39601-S05M2W1B	.624(15.84)	.793(20.13)
6	FHG39601-S06M2W1B	.780(19.80)	.948(24.09)
7	FHG39601-S07M2W1B	.935(23.76)	1.104(28.05)
8	FHG39601-S08M2W1B	1.091(27.72)	1.260(32.01)
9	FHG39601-S09M2W1B	1.247(31.68)	1.416(35.97)
10	FHG39601-S10M2W1B	1.403(35.64)	1.572(39.93)
11	FHG39601-S11M2W1B	1.559(39.60)	1.728(43.89)
12	FHG39601-S12M2W1B	1.715(43.56)	1.884(47.85)

Ordering Information

FHG 396 01 — S XX M 2 W1 B
 1 2 3 4 5 6 7 8 9

1	Category FHG-Housing	2	Series Number 396-Pitch3.96mm	3	Distinction No. 01	4	Row Option S-Single row		
5	Circuits XX	6	Entry Type M-Male	7	Material-Resin 2-PA66	8	Color-Resin W1-White	9	Packaging B-PE Bag

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUN/13	PART NO. FHG39601-SXXM2W1B	ITEM NO. FHG39601	 Leader Of Industry	
	DESIGN UNITS Inch (metric)	X.±.012(0.30)	X.±5'	CHECKED BY JACOB	DATE 25/JUN/13	TITLE Wire to Board Pitch 3.96mm(Housing)		REV 1
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1'	DRAWN BY CHERRY	DATE 25/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TXGA](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)