


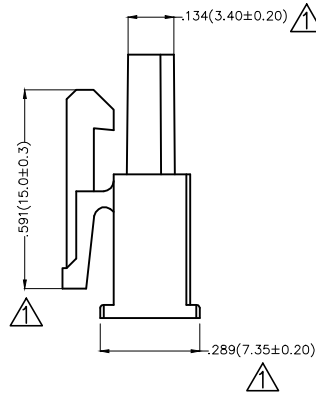
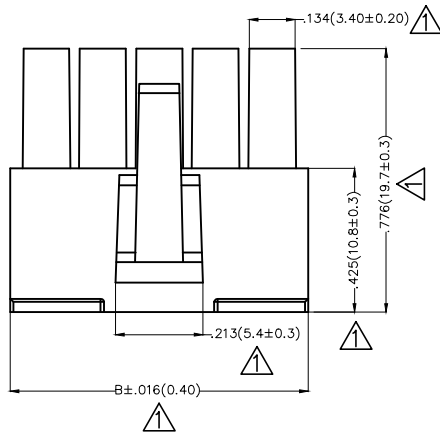


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	1. Structure change 2. Size change	02/APR/20	KATE	CHERRY

Electrical  
 Temperature Range—Operating: -40°C~+105°C  
 Material  
 Housing: PA66( UL 94V-0)  
 Applicable Terminal: FT42001  
 Mates With: FWF42006,FWF42007Series.

Circuits (n)	Part No.	Dimensions(in./mm)	
		A	B
2	FHG42003-S02M2TB	.165(4.20)	.379(9.60)
3	FHG42003-S03M2TB	.331(8.40)	.543(13.80)
4	FHG42003-S04M2TB	.496(12.60)	.709(18.00)
5	FHG42003-S05M2TB	.661(16.80)	.874(22.20)

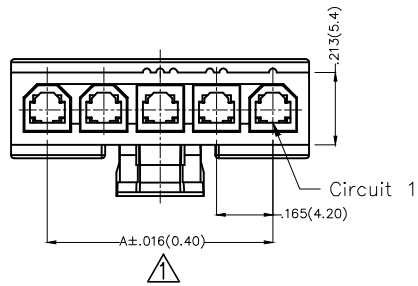

### Ordering Information

FHG 420 03 — S XX M 2 T B  
 1 2 3 4 5 6 7 8 9

1	Category FHG—Housing	2	Series Number 420—Pitch4.2mm	3	Distinction No. 03	4	Row Option S—Single row	5	Circuits XX
6	Entry Type M—Male	7	Material—Resin 2—PA66	8	Color—Resin T—Transparent	9	Packaging B—PE Bag		

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUN/13	PART NO. FHG42003-SXXM2TB	ITEM NO. FHG42003	 Leader Of Industry	
	DESIGN UNITS Inch (metric)	X.±.012(0.30)	X.'±5'	CHECKED BY JACOB	DATE 25/JUN/13	TITLE Wire to Board Pitch 4.2mm(Housing)		REV 1
SCALE 5:1	SIZE A4	X.XX±.008(0.20)	X.'±2'	DRAWN BY CHERRY	DATE 25/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TXGA](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#)  
[63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#)  
[65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#)  
[70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-T012/H](#) [80.063.4001.1](#)  
[800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-](#)  
[001000](#)