



PCB Accessories

Spring Insertion Tool



Anvils and Dies

P158 Spring Impact Insertion Tools






Provide An Easy Method of Manually Installing:

- Terminals
- Pins
- Wrap Posts
- Eyelets



This spring actuated terminal insertion tool with interchangeable die points provides a happy compromise between slow manual tools and expensive machines for installing terminals in Vectorbord. The P158 impact tool with associated die points has an adjustable spring which supplies installation impact force. Since the impact is not governed by human strength, each terminal is easily and consistently installed with the optimum pressure. Also available are anvils.

Insertion/Staking Methods for Terminals

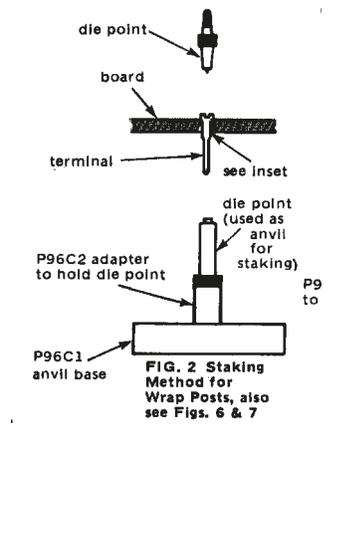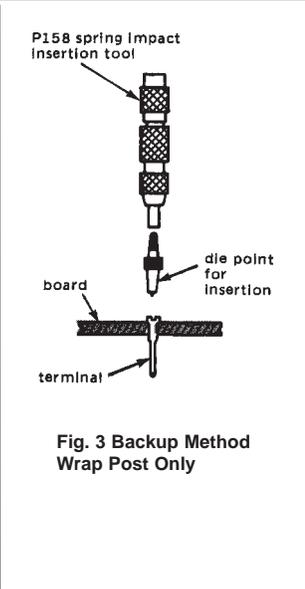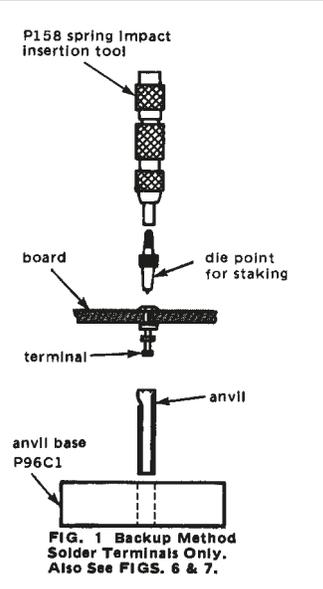

Terminal Reference	Description	Req'd Hole Dia.	Bd Thk.	Die Part No.	Anvil Part No.	Die/Anvil Intended For
K24	Inbord Pin	.042"	1/16"	D7-2	N/A	Insertion
K30, K36	Inbord Pin	.042"	1/16"	D7-2	N/A	Insertion
			3/32"			
K31	Inbord Pin	.042"	1/16"	D7-2	N/A	Insertion
			3/32"			
T44Series	Sq. Pin	.042"	1/16"	D11	D7-4	Insertion
T44Series	Sq. Pin	.042"	1/16"	D11	D7	Staking
T46-2	Terminal	.042"	1/16"	D7-2	N/A	Insertion
T46-3	Terminal	.042"	1/16"	D7-4	N/A	Insertion
T46-5	Terminal	.042"	1/16"	D7-2	N/A	Insertion
T49Series	Sq. Pin	.042"	1/16"	D8	D7-4	Insertion
T49Series	Sq. Pin	.042"	1/16"	D7	D8	Staking
T68Series	Sq. Pin	.042"	1/16"	D17	D7-4	Insertion
T68Series	Sq. Pin	.042"	1/16"	D17	D7	Staking
R30Series	Socket Pin	.055"	1/16"	D10	N/A	Insertion
			3/32"			
R31Series	Socket Pin	.055"	1/16"	D10	N/A	Insertion
			3/32"			
R32Series	Socket Pin	.042"	1/16"	D9	N/A	Insertion
R52Series	Socket Pin	.055"	1/8"	D19	N/A	Insertion
T125	Terminal	.042"	1/16"	D19	A19	Insertion
T126	Terminal	.042"	1/16"	D20	A19	Insertion

Tools



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Punches & Dies](#) category:

Click to view products by [Vector](#) manufacturer:

Other Similar products are found below :

[58510-1](#) [63454-1601](#) [63457-0056](#) [63457-3401](#) [730-5/8](#) [730BB-1-3/8](#) [PV-670508-001](#) [1328](#) [1338](#) [13782656](#) [13782673](#) [13782686](#) [AR-19](#)
[AR-24](#) [1528-TL](#) [1583609-1](#) [1720](#) [1762951-1](#) [2063500-2](#) [19031-0168](#) [AR-20](#) [AR-23](#) [313336-3](#) [11-19-3122](#) [539663-1](#) [63446-2241](#) [TL-18](#)
[0634451912](#) [1762674-1](#) [63454-0123](#) [68240-1](#) [68247-1](#) [734252](#) [313183-1](#) [PA2029](#) [119174-001](#) [23846-1](#) [11-40-5342](#) [68010-2](#) [690370015](#)
[730BB-1-1/8](#) [730BB-1-1/16](#) [19032-0048](#) [63465-0023](#) [11-40-4438](#) [63457-0041](#) [2906252-01](#) [19032-0202](#) [11-11-0054](#) [11-11-0052](#)