



T-3 1/4 Miniature Bayonet Base

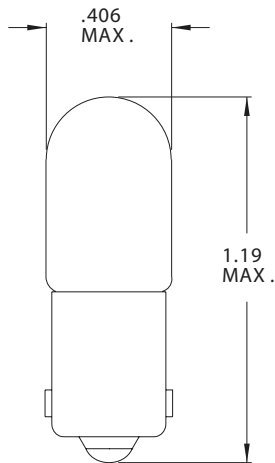

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM1826	18.0	.15	1.8	250	C-2V
CM1437	24.0	.06	.90	20	C-2F
CM1818	24.0	.17	3.3	250	C-2V
CM313	28.0	.17	3.5	500	C-2F
CM757	28.0	.08	.62	7,500	C-2F
CM1819	28.0	.04	.34	2,500	C-2F
CM1820	28.0	.10	1.6	1,000	C-2F
CM1829	28.0	.07	1.0	1,000	C-2F
CM1843	28.0	.02	.20	3,000	C-2F
CM1864	28.0	.17	3.0	1,500	C-2F
CM1873	28.0	.20	3.0	7,000	C-2F
CM1822	36.0	.10	2.1	1,000	C-2F
CM1828	37.5	.05	.65	3,000	C-2F
CM1835	55.0	.05	1.1	5,000	C-5
CM8-3995	130.0	.02	.20	2,000	C-5
CM949	130.0	.022	.40	2,000	2CC-2F

T-3 1/4 Miniature Screw Base

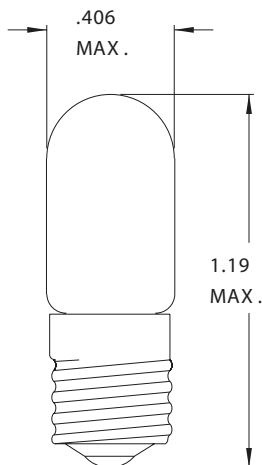

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM1800	1.35	.06	.07	500	S-2
CM48	2.00	.06	.04	1000	S-2
CM41	2.50	.50	.50	3000	C-2R
CM42	3.20	.35	.50	3000	C-2R
CM40	6.30	.15	.50	3000	C-2R
CM46	6.30	.25	.90	3000	C-2R
CM1481	14.0	.15	1.5	200	C-2V
CM1487	14.0	.20	1.4	3000	C-2V
CM1821	28.0	.17	3.4	500	C-2F
CM1832	37.5	.05	.65	3000	C-2F
CM1823	48.0	.10	3.2	1000	C-2F
CM750	55.0	.05	.72	7500	C-13
CM8-3994	130.0	.02	.20	2000	C-5

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Visual Communications manufacturer:

Other Similar products are found below :

[VAOL-3MCE2](#) [7349](#) [139A-403A](#) [25P-607W](#) [CMC01R](#) [CNXBE4218](#) [5314N1](#) [4302H5-5V](#) [1092D3-28V](#) [5602F1-5V](#) [CNX718N90005T](#)
[VC1510145W3](#) [B2A-10PK](#) [6S6/30V-10PK](#) [1091M1-24V](#) [CMD95-21VRC/TR10](#) [CTHS15CIC04ONOFF](#) [CNX"C"E"4"1"04](#) [2SB-NWG48H](#)
[2SB-NWW48H](#) [7512D2](#) [CNX_310_220_E_4_1_08](#) [CNX310033X4124](#) [3150-10PK](#) [4301H11](#) [4304H5](#) [LMS093CTP](#) [4303F5](#) [5400A1](#)
[CMD15-21UBC/TR8](#) [VAOS-C402S9-BW50](#) [LMS_113_CTP](#) [CTHS15CIC06ALARM](#) [STD_850_BLK](#) [SML_190_RTP](#) [2110A1](#) [5302H5-5V](#)
[VAOL-S6RP4](#) [LMS_053_CTP](#) [5680F7_7](#) [CNX722C50024W](#) [DSM7UA30105](#) [334](#) [CNX"482"1"RTP"12](#) [L79D-Y125-W](#) [2191QL7-24V](#)
[5352T1-5VLC](#) [1030D3](#) [6013M5](#) [PS90](#)