



T-3 1/4 Miniature Bayonet Base

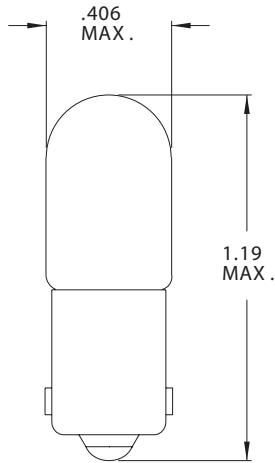

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM1826	18.0	.15	1.8	250	C-2V
CM1437	24.0	.06	.90	20	C-2F
CM1818	24.0	.17	3.3	250	C-2V
CM313	28.0	.17	3.5	500	C-2F
CM757	28.0	.08	.62	7,500	C-2F
CM1819	28.0	.04	.34	2,500	C-2F
CM1820	28.0	.10	1.6	1,000	C-2F
CM1829	28.0	.07	1.0	1,000	C-2F
CM1843	28.0	.02	.20	3,000	C-2F
CM1864	28.0	.17	3.0	1,500	C-2F
CM1873	28.0	.20	3.0	7,000	C-2F
CM1822	36.0	.10	2.1	1,000	C-2F
CM1828	37.5	.05	.65	3,000	C-2F
CM1835	55.0	.05	1.1	5,000	C-5
CM8-3995	130.0	.02	.20	2,000	C-5
CM949	130.0	.022	.40	2,000	2CC-2F

T-3 1/4 Miniature Screw Base

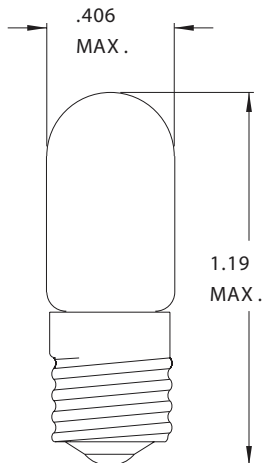

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM1800	1.35	.06	.07	500	S-2
CM48	2.00	.06	.04	1000	S-2
CM41	2.50	.50	.50	3000	C-2R
CM42	3.20	.35	.50	3000	C-2R
CM40	6.30	.15	.50	3000	C-2R
CM46	6.30	.25	.90	3000	C-2R
CM1481	14.0	.15	1.5	200	C-2V
CM1487	14.0	.20	1.4	3000	C-2V
CM1821	28.0	.17	3.4	500	C-2F
CM1832	37.5	.05	.65	3000	C-2F
CM1823	48.0	.10	3.2	1000	C-2F
CM750	55.0	.05	.72	7500	C-13
CM8-3994	130.0	.02	.20	2000	C-5

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Lamps category](#):

Click to view products by [Visual Communications manufacturer](#):

Other Similar products are found below :

[5911-086-13](#) [5AB](#) [6180](#) [7009](#) [8623](#) [909](#) [912](#) [1224](#) [1230](#) [DE603](#) [DNW21-DW10/BLA](#) [BF20100-11B](#) [1892](#) [NL177WL2A](#) [NL276C2A](#)
[IFL-LX2162-16T](#) [C2A-T](#) [C9A](#) [301](#) [303](#) [SM2440L](#) [A1C](#) [A2B](#) [19](#) [268](#) [GT-NE6H1225T](#) [CM1820](#) [CM5004WW](#) [303](#) [32-2211T](#) [36EN-2113](#)
[407](#) [4916S1](#) [521-7332](#) [5314N1](#) [5314N2](#) [311](#) [WWT1-EW10/GRN](#) [4925H1](#) [DW07](#) [MS25231-313](#) [5603437](#) [5603851](#) [CM2](#) [7683EBP](#) [8553](#)
[XE135B](#) [WWT2-EW34BLA](#) [5705H7](#) [NL2951WL2G](#)