



T-3/4 Micro-Midget Flange Base




Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM8383	5.0	.080	.150	15,000	C-2R
CM8538	5.0	.015	.020	1,000	C-2R
CM8587	5.0	.060	.030	6,000	C-2R
CM8828	5.0	.075	.090	25,000	C-2R
CM8913	5.0	.060	.050	25,000	C-2R

T-3/4 Bi-Pin Base (.050")

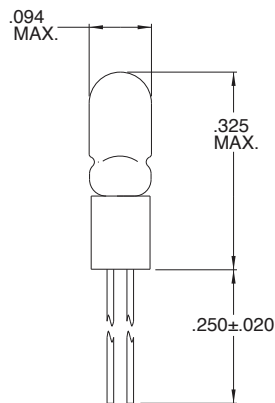

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM7811	1.5	.015	.01	5,000	C-6
CM7112	5.0	.021	.03	10,000	C-2
CM7113	5.0	.060	.03	60,000	C-2R
CM7114	5.0	.060	.05	25,000	C-2R
CM7115	5.0	.060	.15	3,000	C-2R
CM7116	5.0	.075	.09	25,000	C-2R
CM7117	5.0	.080	.15	15,000	C-2R
CM7118	5.0	.115	.15	40,000	C-2R
CM7119	5.0	.115	.20	5,000	C-2R
CM7538	5.0	.015	.02	1,000	C-2R

T-1 Wire Terminal (short)

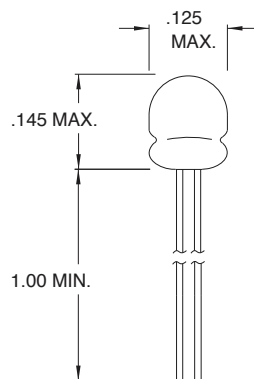

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM2022	5.0	.021	.030	10,000	C-2R
CM6152	5.0	.060	.150	5,000	C-2R
CM6802	5.0	.060	.030	60,000	C-2R
CM6832	5.0	.060	.050	25,000	C-2R
CM7132	5.0	.075	.090	25,000	C-2R
CM7152	5.0	.115	.150	40,000	C-2R
CM7009	28.0	.024	.150	1,500	CC-2F

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Lamps](#) category:

Click to view products by [Visual Communications Company](#) manufacturer:

Other Similar products are found below :

[5AB](#) [6180](#) [8111](#) [8623](#) [912](#) [120PS](#) [1224](#) [DE603](#) [DW50](#) [IFL-LX2162-16T](#) [C9A](#) [C9A](#) [3015](#) [303](#) [19](#) [PR13](#) [268](#) [GT-NE6H1225T](#)
[CM5004WW](#) [32-2211T](#) [323](#) [509K](#) [5314N1](#) [5314N2](#) [WWT1-EW10/GRN](#) [4925H1](#) [DW07](#) [10C7DC-120V](#) [1141](#) [MS25231-313](#) [E73](#) [CM2](#)
[7683EBP](#) [8553](#) [XE135B](#) [WWT2-EW34BLA](#) [6S6/30V](#) [7367](#) [1301910036](#) [7A1H](#) [8630FBBB](#) [85](#) [106](#) [105](#) [BGF717-UV1](#) [1974D](#) [1495](#) [373](#)
[400](#) [502](#)