



## T-5 1/2 Wedge Base




| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM914       | 4.0            | .90  | 3.5  | 50         | C-6           |
| CM926       | 4.0            | 1.80 | 7.5  | 50         | C-2R          |
| CM903       | 6.0            | 1.00 | 6.0  | 200        | C-2R          |
| CM908       | 6.0            | 1.50 | 12.0 | 50         | C-2R          |
| CM909       | 6.0            | .62  | 3.8  | 30         | C-2R          |
| CM927       | 6.0            | 1.20 | 8.0  | 50         | C-2R          |
| CM929       | 6.0            | 1.00 | 6.5  | 50         | C-2R          |
| CM915       | 12.0           | .75  | 11.0 | 50         | C-2R          |
| CM912       | 12.8           | 1.00 | 12.0 | 1,000      | C-2R          |
| CM917       | 12.8           | 1.20 | 10.0 | 1,200      | C-2F          |
| CM921       | 12.8           | 1.40 | 21.0 | 1,000      | C-2R          |
| CM922       | 12.8           | .98  | 15.0 | 200        | C-2R          |
| CM906       | 13.0           | .69  | 6.0  | 1,000      | C-2F          |
| CM904       | 13.5           | .69  | 4.0  | 5,000      | C-2F          |
| CM916       | 13.5           | .54  | 2.0  | 10,000     | C-2F          |
| CM928       | 28.0           | .30  | 6.0  | 500        | C-2F          |

## TL-3/4 Wire Terminal Lens End



| Part Number | Design Voltage | Amps | Spot Characteristic | Life Hours | Filament Type |
|-------------|----------------|------|---------------------|------------|---------------|
| CM1212      | 5.0            | .06  | None                | 25,000     | C-2R          |
| CM1425      | 5.0            | .12  | None                | 40,000     | C-2R          |

## TL-3/4 Micro-Midget Flange Base Lens End

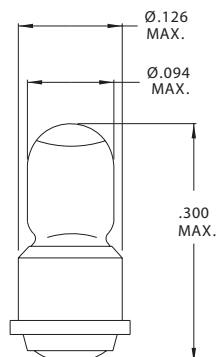

| Part Number | Design Voltage | Amps | Spot Characteristic | Life Hours | Filament Type |
|-------------|----------------|------|---------------------|------------|---------------|
| CM3909      | 5.0            | .12  | None                | 16,000     | C-2R          |
| CM3910      | 5.0            | .06  | None                | 25,000     | C-2R          |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Lamps](#) category:*

*Click to view products by [Visual Communications Company](#) manufacturer:*

Other Similar products are found below :

[5AB](#) [6180](#) [8111](#) [8623](#) [912](#) [120PS](#) [1224](#) [DE603](#) [DW50](#) [IFL-LX2162-16T](#) [C9A](#) [C9A](#) [3015](#) [303](#) [19](#) [PR13](#) [268](#) [GT-NE6H1225T](#)  
[CM5004WW](#) [32-2211T](#) [323](#) [509K](#) [5314N1](#) [5314N2](#) [WWT1-EW10/GRN](#) [4925H1](#) [DW07](#) [10C7DC-120V](#) [1141](#) [MS25231-313](#) [E73](#) [CM2](#)  
[7683EBP](#) [8553](#) [XE135B](#) [WWT2-EW34BLA](#) [6S6/30V](#) [7367](#) [1301910036](#) [7A1H](#) [8630FBBB](#) [85](#) [106](#) [105](#) [BGF717-UV1](#) [1974D](#) [1495](#) [373](#)  
[400](#) [502](#)