



T-5 1/2 Wedge Base




Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM914	4.0	.90	3.5	50	C-6
CM926	4.0	1.80	7.5	50	C-2R
CM903	6.0	1.00	6.0	200	C-2R
CM908	6.0	1.50	12.0	50	C-2R
CM909	6.0	.62	3.8	30	C-2R
CM927	6.0	1.20	8.0	50	C-2R
CM929	6.0	1.00	6.5	50	C-2R
CM915	12.0	.75	11.0	50	C-2R
CM912	12.8	1.00	12.0	1,000	C-2R
CM917	12.8	1.20	10.0	1,200	C-2F
CM921	12.8	1.40	21.0	1,000	C-2R
CM922	12.8	.98	15.0	200	C-2R
CM906	13.0	.69	6.0	1,000	C-2F
CM904	13.5	.69	4.0	5,000	C-2F
CM916	13.5	.54	2.0	10,000	C-2F
CM928	28.0	.30	6.0	500	C-2F

TL-3/4 Wire Terminal Lens End



Part Number	Design Voltage	Amps	Spot Characteristic	Life Hours	Filament Type
CM1212	5.0	.06	None	25,000	C-2R
CM1425	5.0	.12	None	40,000	C-2R

TL-3/4 Micro-Midget Flange Base Lens End

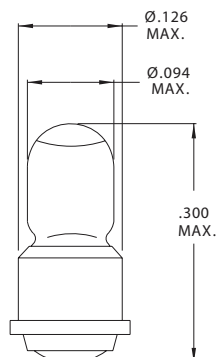

Part Number	Design Voltage	Amps	Spot Characteristic	Life Hours	Filament Type
CM3909	5.0	.12	None	16,000	C-2R
CM3910	5.0	.06	None	25,000	C-2R

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Lamps](#) category:

Click to view products by [Visual Communications Company](#) manufacturer:

Other Similar products are found below :

[5AB](#) [6180](#) [8111](#) [8623](#) [912](#) [120PS](#) [1224](#) [DE603](#) [DW50](#) [IFL-LX2162-16T](#) [C9A](#) [C9A](#) [3015](#) [303](#) [19](#) [PR13](#) [268](#) [GT-NE6H1225T](#)
[CM5004WW](#) [32-2211T](#) [323](#) [509K](#) [5314N1](#) [5314N2](#) [WWT1-EW10/GRN](#) [4925H1](#) [DW07](#) [10C7DC-120V](#) [1141](#) [MS25231-313](#) [E73](#) [CM2](#)
[7683EBP](#) [8553](#) [XE135B](#) [WWT2-EW34BLA](#) [6S6/30V](#) [7367](#) [1301910036](#) [7A1H](#) [8630FBBB](#) [85](#) [106](#) [105](#) [BGF717-UV1](#) [1974D](#) [1495](#) [373](#)
[400](#) [502](#)