




Chicago Miniature Lighting, LLC

Lighting the world since 1910


S-11 Double Contact Bayonet Base,
 T-3/4 Wire Terminal &
 T-3/4 Micro-Midget Flange Base

S-11 Double Contact Bayonet Base

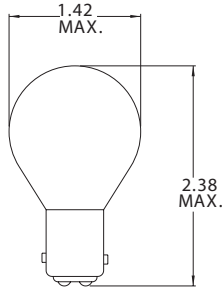


Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM1724	6.2	4.50	32.0	400	C-6
CM310	28.0	.90	32.0	300	C-2V
CM312	28.0	1.29	50.0	300	C-2V

T-3/4 Wire Terminal

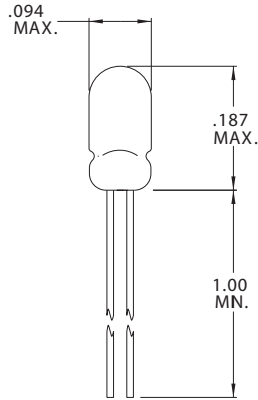

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM7101	1.5	.015	.010	5,000	C-2R
CM28	4.5	.021	.020	5,000	C-2R
CM30	4.5	.021	.020	5,000	C-2R
CM3102	4.5	.022	.020	5,000	C-2R
CM2	5.0	.021	.030	10,000	C-2R
CM6153	5.0	.060	.150	3,000	C-2R
CM6803	5.0	.060	.030	60,000	C-2R
CM6833	5.0	.060	.050	25,000	C-2R
CM7102	5.0	.115	.200	5,000	C-2R
CM7133	5.0	.075	.090	25,000	C-2R
CM7153	5.0	.115	.150	40,000	C-2R
CM8537	5.0	.015	.020	1,000	C-2R
CM8666	5.0	.080	.150	15,000	C-2R

T-3/4 Micro-Midget Flange Base

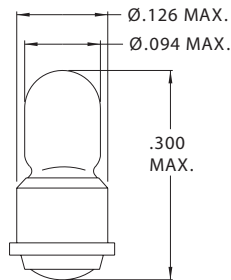

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM3810	1.5	.015	.003	10,000	C-6
CM3811	1.5	.015	.010	5,000	C-6
CM7121	2.5	.110	.001	10,000	C-2R
CM6183	5.0	.060	.150	3,000	C-2
CM7122	5.0	.021	.030	10,000	C-2R
CM7123	5.0	.115	.200	5,000	C-2R
CM8270	5.0	.115	.150	40,000	C-2R

147 Central Avenue
 Hackensack, NJ 07601
 Phone: (201) 489-8989
 Fax: (201) 489-6911

18703 Dix Toledo Road
 Brownstown, MI 48193

Saret Zone Franca, Edificio B
 Alajuela Costa Rica

E-mail: sales@chml.com • Web Site: www.chml.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Lamps](#) category:

Click to view products by [Visual Communications Company](#) manufacturer:

Other Similar products are found below :

[5AB](#) [6180](#) [8111](#) [8623](#) [912](#) [120PS](#) [1224](#) [DE603](#) [DW50](#) [IFL-LX2162-16T](#) [C9A](#) [C9A](#) [3015](#) [303](#) [19](#) [PR13](#) [268](#) [GT-NE6H1225T](#)
[CM5004WW](#) [32-2211T](#) [323](#) [509K](#) [5314N1](#) [5314N2](#) [WWT1-EW10/GRN](#) [4925H1](#) [DW07](#) [10C7DC-120V](#) [1141](#) [MS25231-313](#) [E73](#) [CM2](#)
[7683EBP](#) [8553](#) [XE135B](#) [WWT2-EW34BLA](#) [6S6/30V](#) [7367](#) [1301910036](#) [7A1H](#) [8630FBBB](#) [85](#) [106](#) [105](#) [BGF717-UV1](#) [1974D](#) [1495](#) [373](#)
[400](#) [502](#)